



greenlux
cost reduction LED lighting

Horizon LED Linear Light 4040

Available in 18W, 24W & 36W
80% lumen maintenance at 50,000 hours

GSHOR-18W-2F
GSHOR-24W-4F
GSHOR-36W-5F

- Simple and modern design, screwless at end cap
- Extrusion aluminum lamp body and PC cover
- No UV or IR rays. No mercury
- Replaces traditional T8 Fixture
- Soft lighting effect, even distribution of light
- High light output 1800/2400/3600lms
- 2 types installation method: Surface mounted and Hanging
- Applications include Hotels, Hallways, Offices, Commerical and Industrial buildings
Schools, Colleges, Universities and hospitals



Specifications

Colour Range	2700-6500k
Power Consumption	18W / 24W / 36W
Lumens	1800 / 2400 / 3600lm
Luminous Efficiency	100lm/W
Input Voltage	100V/240V AC
Beam angle	110°
CRI	80
PF	>0.95
Chipset	SMD 2835
Dimmable	0-10V (option)

Dimensions & Materials

Product Dimensions (mm)	2Ft 600*40*40 (LxWxH) 4Ft 1200*40*40 (LxWxH) 5Ft 1500*40*40 (LxWxH)
Housing Material	Aluminum Lamp Body + PC cover
Housing Color	White/Grey/Black

Certification and Safety

Certifications	IP40, CE, RoHS, SAA,, RCM
Environment	Indoor Location
Warranty	3 years






greenlux
cost reduction LED lighting

Horizon LED Linear Light 4040

Dimensions (Unit: mm/inch)

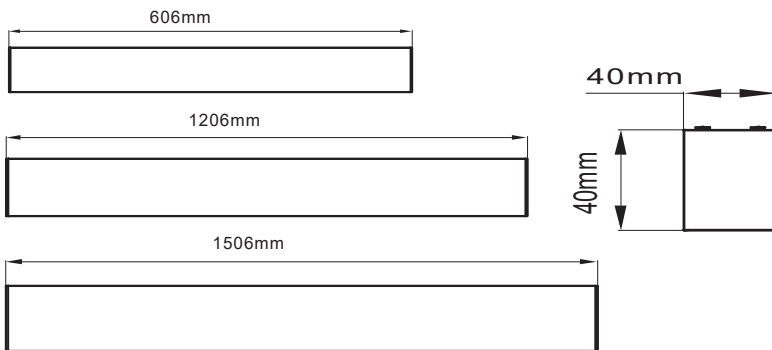


Features

1.Simple and modern design, screwless at end cap.



2.Extrusion aluminum lamp body and PC cover.



3.Soft lighting effect, even distribution of light.



Model	CCT	LED Type	Lumen(lm)	Power	Dimensions(mm)	Voltage(V)
GSHOR-18W-4040-2F	2700-6500K	SMD 2835	1800lm	18W	600*40*40	100V/240V AC
GSHOR-24W-4040-4F			2400lm	24W	1200*40*40	
GSHOR-36W-4040-5F			3600lm	36W	1500*40*40	

