

KASA SMART SERIES LED HIGHBAY

BLUETOOTH SMART CONTROL

TUYA COMPATIBLE



SMART-READY

- Center-hollow design
- Fast installation of sensor or wireless control module
- Bluetooth Smart Control
- Tuya Compatible
- 140lm/w & 180lm/w options

FINISH

Five-step, super durable TGIC paint material help resist **all tough environment** conditions while providing optional colour maintenance.

OPTICS

Available with 3 types of fine-designed PC lens features low glare with **UGR<19** for more models.

CONSTRUCTION

Aluminum alloy made heatsink features hollow fins to optimise thermal management which also result in **less dust accumulation and light weight.**



Order Combo

Series	Power	CCT	Beam Angle	DIM	Voltage	CRI	Finish	Mounting	Sensor	Accessory
KASA SMART	100W	4000K	60°	1-10v	100-277V ^①	Ra80	BLACK WHITE	Hook Pole Bracket	MTOCC ^②	PR70 ^③ AR
	150W	5000K	90°							
	200W		120°							
	240W									

Lumen Table

Model No.	Power	Beam Angle	4000K Ra80		5000K Ra80	
			Lumens	LPW	Lumens	LPW
GBKAS-100W-S	100	120°	14000	140	14300	143
		90°	14000	140	14300	143
		60°	13700	137	14000	140
GBKAS-150W-S	150	120°	21000	140	21400	143
		90°	21000	140	21400	143
		60°	20600	137	21000	140
GBKAS-200W-S	200	120°	28000	140	28600	143
		90°	28000	140	28600	143
		60°	27400	137	28000	140
GBKAS-240W-S	240	120°	33600	140	34300	143
		90°	33600	140	34300	143
		60°	32900	137	33600	140

Above test results are based on initial stage and with AC277V input.


Remarks

- ① Also available with 120-347v and 180-528V
- ② MTOCC: UL certified DC12V microwave sensor Max 12m high.
- ③ PR70: Polycarbonate made reflector
AR-L: Aluminum reflector for 200 and 240W
AR-S: Aluminum reflector for 100 and 150W


Accessories



Adjustable bracket

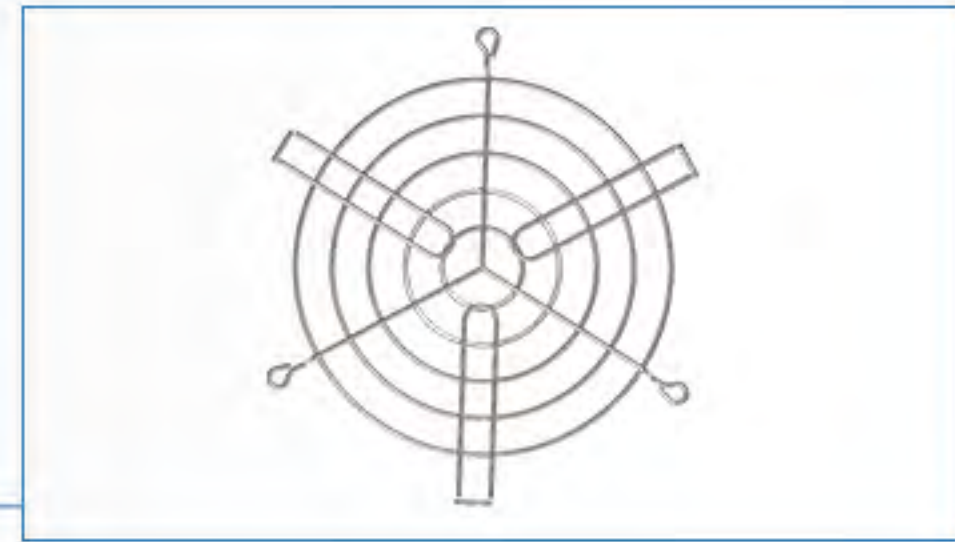


Wire guard

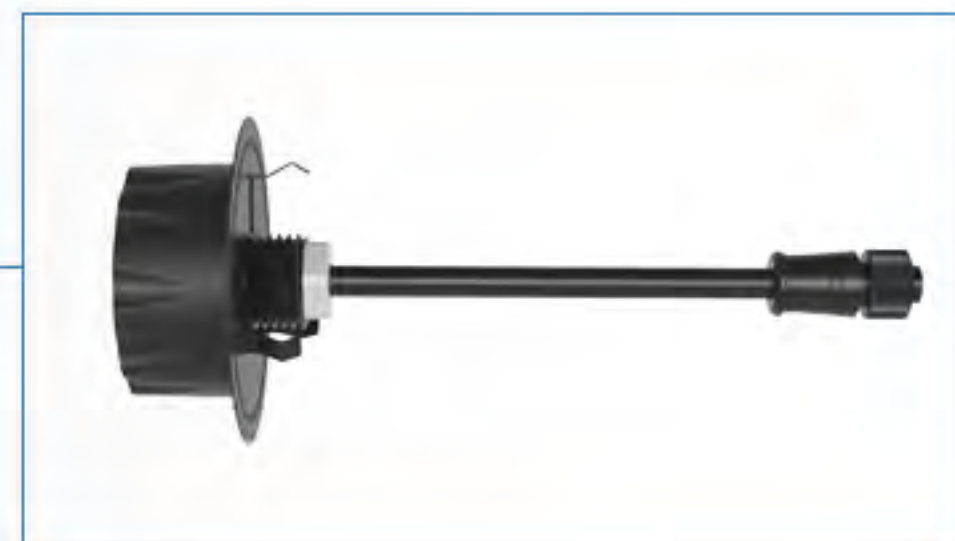


Sensor Kit

Dimension (mm)

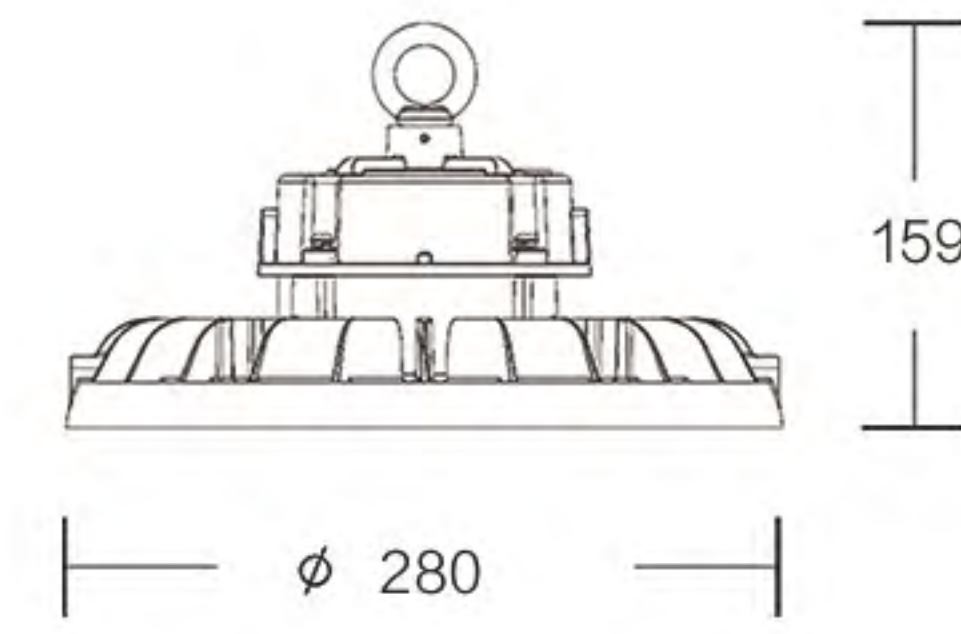


100W / 150W

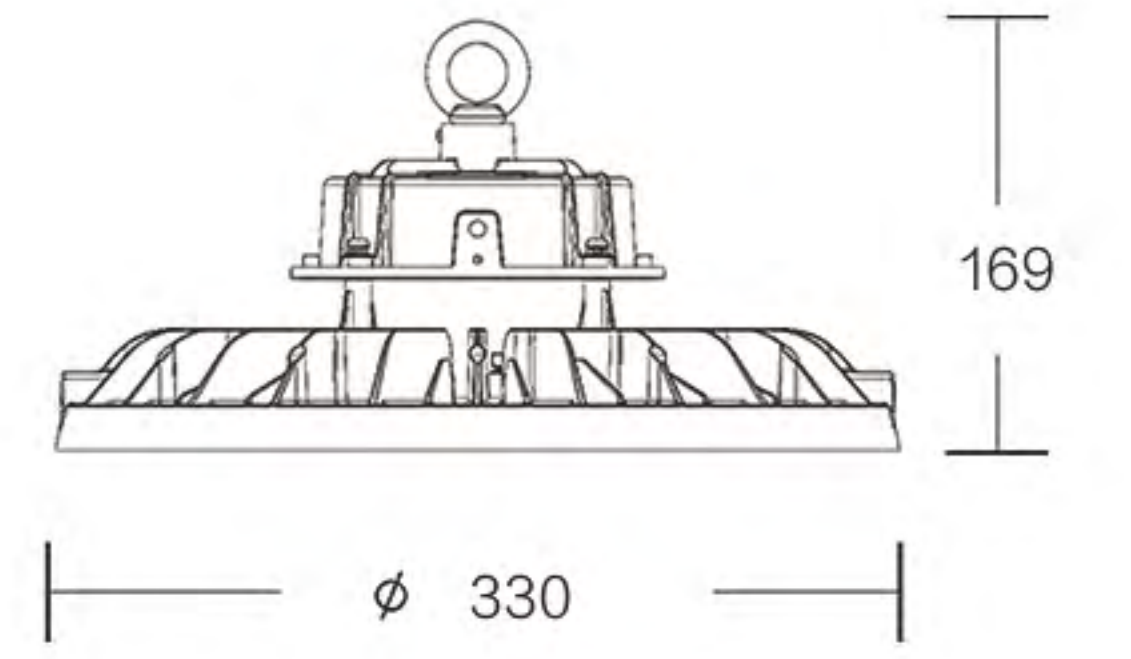


200W / 240W


Installation

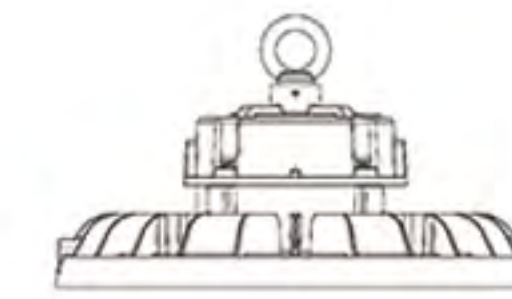

Ring mount

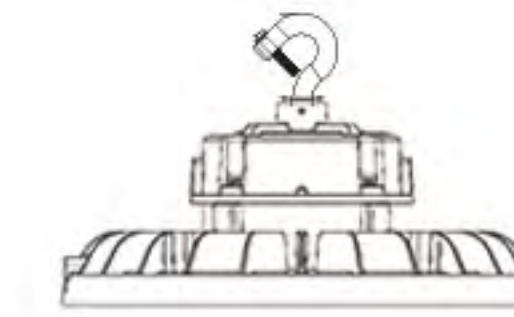


Hook mount

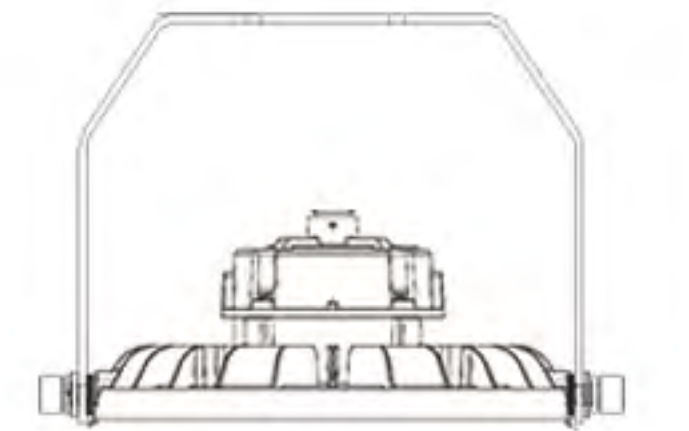


Bracket mount

Optical

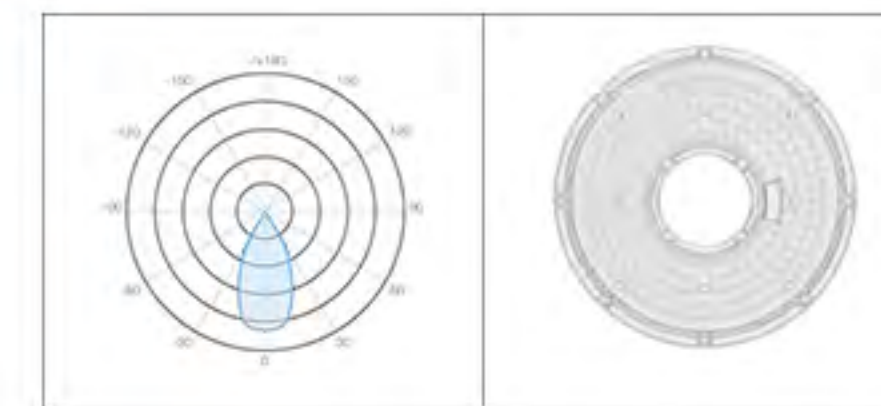


60°

PC Lens

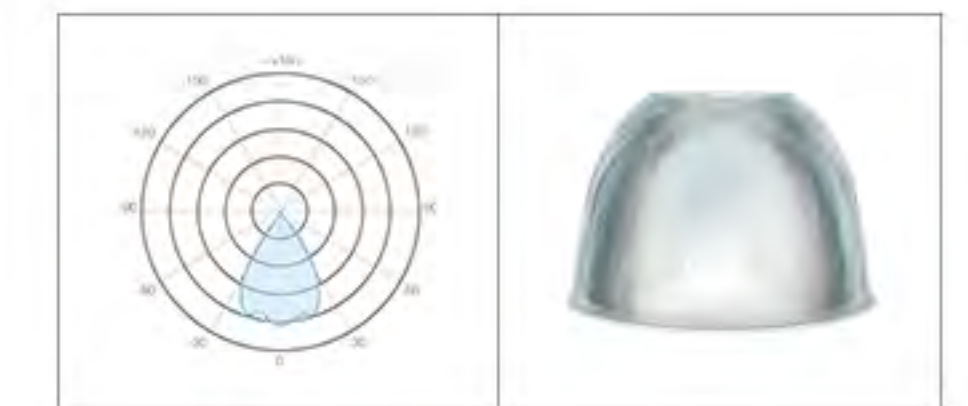


70°

PC reflector

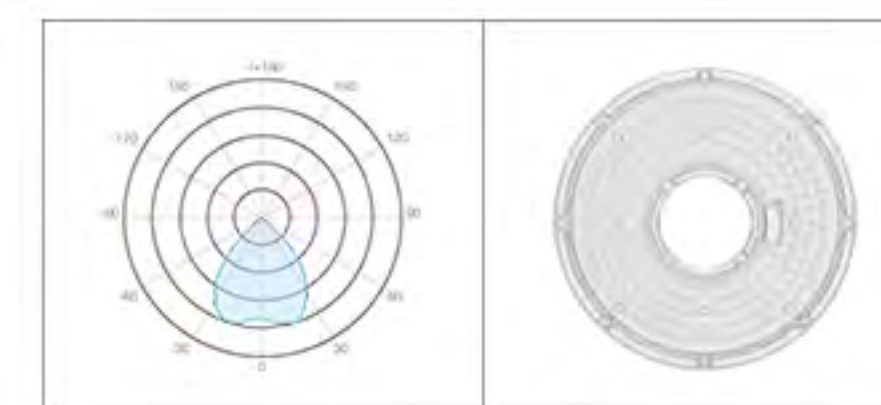

90°

PC Lens

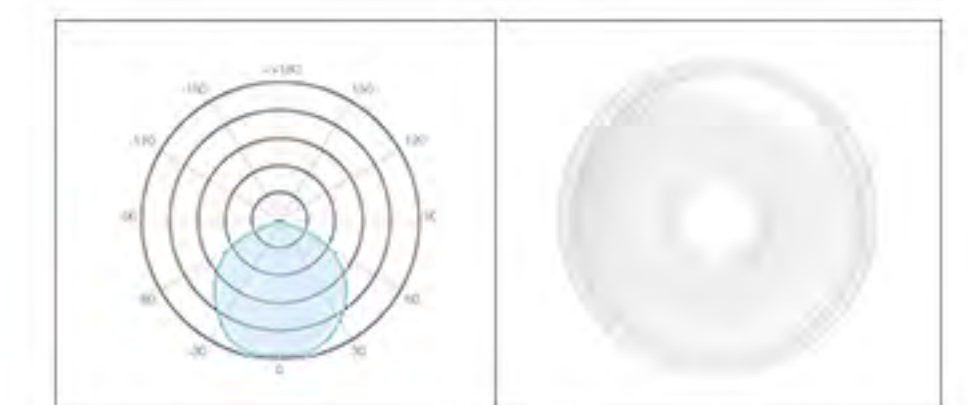

120°

PC lens



KASA SMART

60/100/150/200/240W

 +  **Bluetooth**
SMART

Plug&play sensor + mesh network




Plug&play control module


200W


150W

Field selectable
lumen output


120W


100W

NEO

UGR<19 with
individual lens

180lmw with
fresnel lens

Field-installed IP65 emergency kit