



greenlux
cost reduction LED lighting

Opal Series Suspended LED Panel Light

Energy Saving Commercial Lighting
80% lumen maintenance at 50,000 hours

- Unique transparent design
- Easy assembling magnetic power supply pack
- No IR or UV radiation, low heat generation
- Evenly distributed light; no flicker or glare
- High quality SMD 2835 chipset
- High lumen output at 95~100lm/W
- High quality 6063 aluminum profile with PMMA diffuser, excellent cooling effect
- IP40 Rated
- Applications offices, convention centres, hotels, large retail stores, schools & hospitals etc.



Specifications

Colour Range	3000-6500K
Power Consumption	40W
Lumen Output	3840lm
Input Voltage	AC 100 ~ 240V
Power Factor	>0.9
Current	300mA
Beam angle	360°
CRI	>80
Chipset	SMD 2835
Driver	Class II SAA



Dimensions & Materials

Product Dimensions (mm)	1200*300*14
Housing Material	Aluminum
Housing Color	Black & Silver






greenlux
cost reduction LED lighting

Opal Series Suspended LED Panel Light

Dimensions

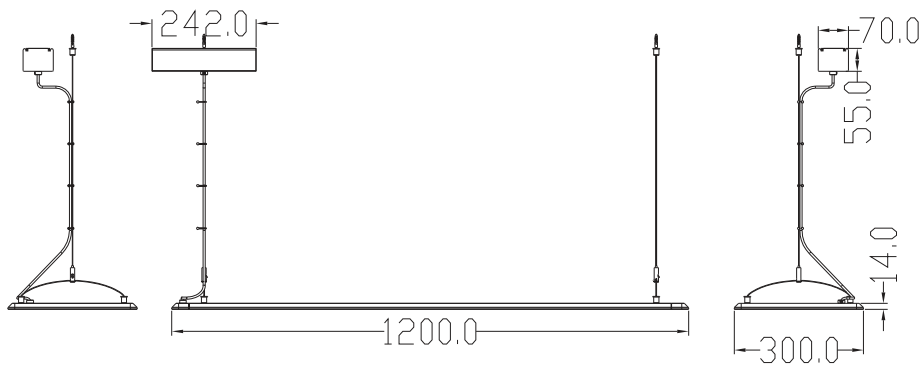

Model#	Length (mm)	Beam Angle	CCT	Lumens	Wattage	LED
GSOPA-40W	1200*300*14	360°	3000-6500k	3840	40W	SMD 2835

