

Slim 02 Ceiling Mounted & Suspended LED Batten



- Super slim & elegant design
- Creating a brilliant lighting atmosphere
- Ceiling mounted & suspended installations
- Seamlessly linkable option
- Anti-glare, low heat generation
- High quality SMD chipset
- High lumen output at 95lm/W
- High quality aluminum profile with opal diffuser, excellent cooling effect
- Triac Dimmer available
- IP20 Rated
- Applications offices, convention centres, hotels, large retail stores, schools & hospitals etc.

Specifications

Colour Range	3000-5700K
Input Voltage	AC 100 ~ 240V
Power Factor	>0.9
Beam angle	120°
CRI	>80
Driver	Class II SAA

Housing Material	Aluminum		
Housing Color	White / Black / Silver		
	Power	Lumens	Dimensions(mm)
Suspended	20W	1900W	600*90*28
	30W	2850W	900*90*28
	40W	3800W	1200*90*28
Ceiling Mounted	20W	1900W	600*90*46
	30W	2850W	900*90*46
	40W	3800W	1200*90*46

IES

LM80

RCM

SAA

IP20

TUV

CE

5 Yrs
Warranty



SEAMLESSLY LINKABLE

SUPER SLIM CONSTRUCTION AND SUPERIOR CAPABILITY

aluminium profile body for good thermal dissipate, surface color treatment is customizable

Customizable finish colour



Light . Make The Change

More simple, more modern.






greenlux
cost reduction LED lighting


Slim 02 Ceiling Mounted & Suspended LED Batten

Dimensions & Photometrics

Suspended

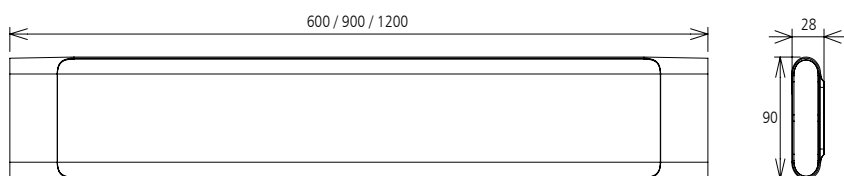


Surface Mounted

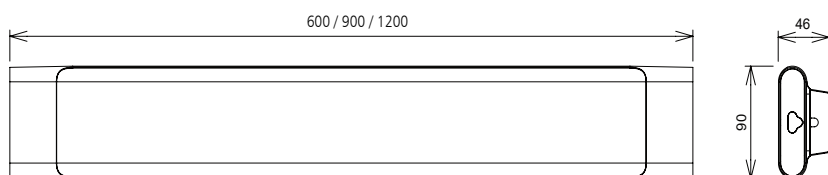

Materials

- Fire-resistant Poly Carbonate diffuser
- Aluminium profile

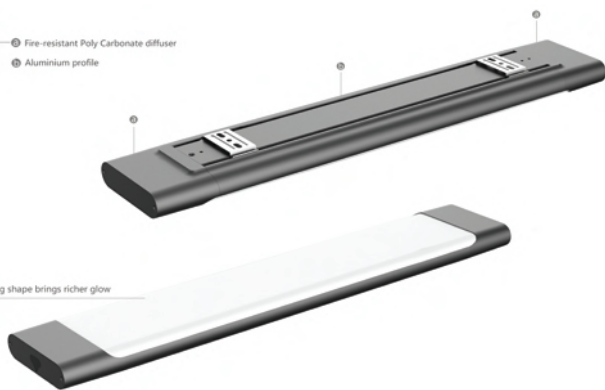

Exquisite suspended accessories optional
suit to use in different environment.

Model#	Dimensions (mm)	Beam Angle	CCT	Lumens	Output	LED
Suspended						
GUSLI-20W-02	600*90*28	120°	3000-5700k	1900	550mA	SMD
GUSLI-30W-02	900*90*28	120°	3000-5700k	2850	800mA	SMD
GUSLI-40W-02	1200*90*28	120°	3000-5700k	3800	1050mA	SMD
Surface Mounted						
GUSLI-20W-02	600*90*46	120°	3000-5700k	1900	550mA	SMD
GUSLI-30W-02	900*90*46	120°	3000-5700k	2850	800mA	SMD
GUSLI-40W-02	1200*90*46	120°	3000-5700k	3800	1050mA	SMD