



**greenlux**  
cost reduction LED lighting

# Ecko 01 Series LED Canopy Light


Available in 20W ~ 80W  
80% lumen maintenance at 50,000 hours

- Photocell & Motion sensor with remote control option
- Surge protector available
- Optimized thermal management system
- Separated drivers from heat sink
- Uniform light for various applications
- High lumen output up to 126lm/W
- Quick plate (for junction box) mounted, ceiling mounted, & hanging installation
- Australian Certified Safety SAA driver
- IP65 Rated, suitable for wet locations
- Applications include car parks, commercial buildings, warehouses, and shopping centers



## Specifications

<b>Colour Range</b>	3000-5000k
<b>Power Consumption</b>	20 / 30 / 40 / 55 / 80W
<b>Lumen</b>	2520lm ~ 10080lm
<b>Input Voltage</b>	AC 220-240V
<b>Beam angle</b>	160°
<b>CRI</b>	>80
<b>Power Factor</b>	>0.9
<b>Chipset</b>	Philips 3030
<b>Sensor (option)</b>	Motion Sensor Photocell Sensor
<b>Dimmable</b>	Triac / Dali / 0-10V (option)

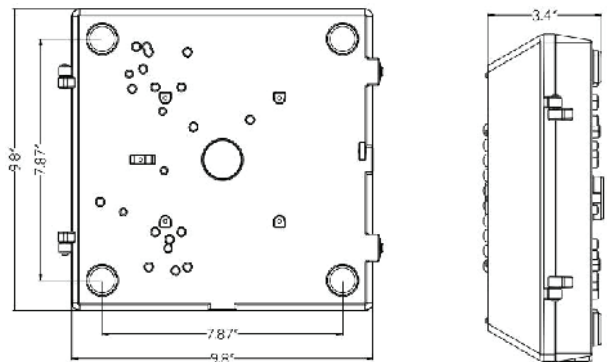

## Dimensions & Materials

<b>Product Dimensions (mm)</b>	249*249*86 (L*W*H)
<b>Housing Material</b>	Die-cast Aluminium + Power Coating Surface
<b>Housing Color</b>	Black / Sliver / White





**greenlux**  
cost reduction LED lighting

# Ecko 01 Series LED Canopy Light

## Sensor

### Photocell Sensor:

Applicable to control passage lighting and doorway lighting automatically in accordance with the ambient lighting level.

### Motion/Daylight Sensor:

0-10V microwave-based motion sensor with integral photocontrol, allowing for three output states: 100%; 10/20/30/50% output; or 0% output. Detection area, hold time, daylight threshold, and dimming level all have DIP switches.

Model#	Dimensions (mm)	Beam Angle	CCT	Lumens	Wattage	LED	Sensor (option)	Dimmable (option)
GGECK-20W-01				2520	20W			
GGECK-30W-01				3780	30W			
GGECK-40W-01	249*249*86	160°	3000-5000k	5040	40W	Philips	Motion Photocell	Triac Dali 0-10V
GGECK-55W-01				6552	55W			
GGECK-80W-01				10080	80W			

