




greenlux
cost reduction LED lighting

Glamour A Surface Mounted LED Downlight

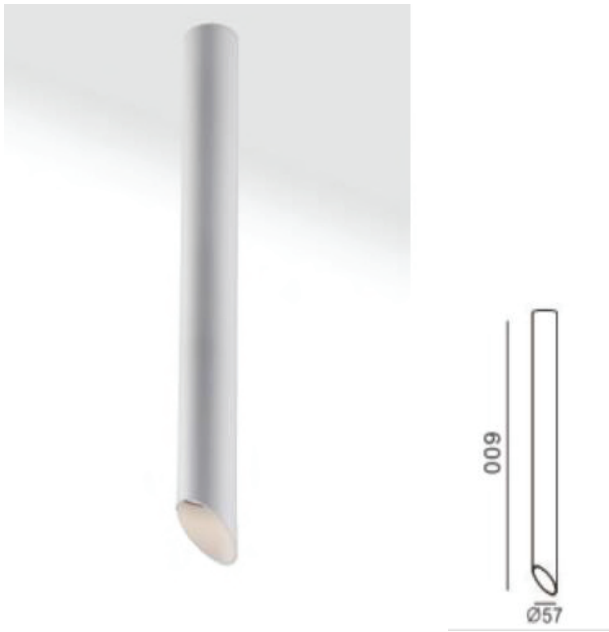

Specifications

Colour Range	2700-4000k
Chipset	COB
Power Consumption	10W
Lumen	1000lm
Input Voltage	100 ~ 240V AC
Beam angle	24° / 36° / 60°
CRI	>80 or 90
Power Factor	>0.9
IP Rating	IP20

- UGR<19
- Exquisite design with strict product quality control
- Low light decay
- High lumen output up to 100lm/W
- High quality Sharp or Cree COB LED chipset
- Reliable TUV constant current isolated driver
- Superior pure aluminum housing with high quality coating for finishing color
- IP20 Rated
- Applications include offices, shopping centres, hotels, restaurants, museums, public areas & households

Dimensions & Material

Product Dimension (mm)	10W	Ø57 * 600
Housing Material	Aluminium Housing	
Housing Color	Black / White / Silver	
Warranty	5 Years	






greenlux
cost reduction LED lighting

GVGLA-10W-C

COB LED CRI≥80 IP20


Powder-coated: White Silver Black
Color temperature: 2700K 3000K 4000K
Beam angle: 24° 36° 60°



GVGLA-6W-A

COB LED CRI≥80 IP20

Powder-coated: White Silver Black
Color temperature: 2700K 3000K 4000K
Beam angle: 24° 36° 60°



GVGLA-10W-D



COB LED CRI≥80 IP20

Powder-coated: White Silver Black
Color temperature: 2700K 3000K 4000K
Beam angle: 24° 36° 60°

GVGLA-6W-B

COB LED CRI≥80 IP20

Powder-coated: White Silver Black
Color temperature: 2700K 3000K 4000K
Beam angle: 24° 36° 60°





greenlux
cost reduction LED lighting

Glamour C Surface Mounted LED Downlight

Model

Model#	Dimensions (mm)	IP Rating	Beam Angle	CCT	Lumens	Wattage	LED	Dimmer (option)
GVGLA-6W-A	Ø57 * 300	IP20			600	6W	COB	Triac
GVGLA-6W-B	Ø57 * 300	IP20	24°	2700-4000k	600	6W	COB	Triac
GVGLA-10W-C	Ø57 * 600	IP20	30°		1000	10W	COB	Triac
GVGLA-10W-D	Ø57 * 600	IP20	60°		1000	10W	COB	Triac

