



**greenlux**  
cost reduction LED lighting

# Honour Series surface Mounted LED Downlight

Available in Multiple Wattage  
80% lumen maintenance at 50,000 hours

- Surface mounted
- High lumen output
- High quality SMD Chipset
- High quality PMMA diffuser with even light output
- High quality Class II SAA Driver
- IP54 waterproof structural design for wet environment
- 3 Year Warranty
- Applications includes hotels, households, offices, shops and public areas such as stairways, lobbies, receptions and corridors



## Specifications

<b>Colour Range</b>	3000-6000k
<b>Power Consumption</b>	8W ~ 18W
<b>Luminous Flux</b>	696lm ~ 1782lm
<b>Input Voltage</b>	200V ~ 240V AC
<b>Output Voltage</b>	60 ~75V
<b>Power Factor</b>	>0.9
<b>CRI</b>	>80
<b>Beam angle</b>	90°
<b>IP Rating</b>	IP 54
<b>Dimmable</b>	Triac Dimmer (option)
<b>Housing Material</b>	Aluminum Alloy + PC Cover
<b>Housing Colour</b>	White

## Dimensions

		8W	100*100*59
Square	15W	150*150*59	
	18W	170*170*59	
	<b>Product Dimensions (mm)</b>		
Round	8W	Ø100*60	
	12W	Ø150*68	
	15W	Ø150*68	
	18W	Ø170*68	






**greenlux**  
cost reduction LED lighting


# Honour Series surface Mounted LED Downlight

## Dimensions & Photometrics


Square 8W

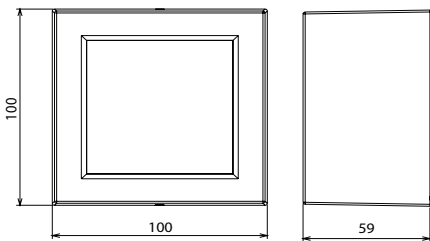


Square 15W

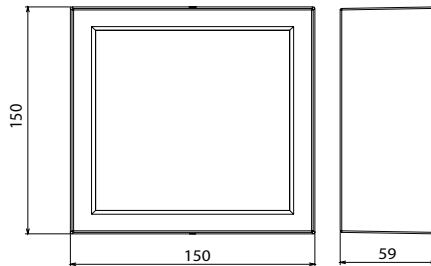


Square 18W

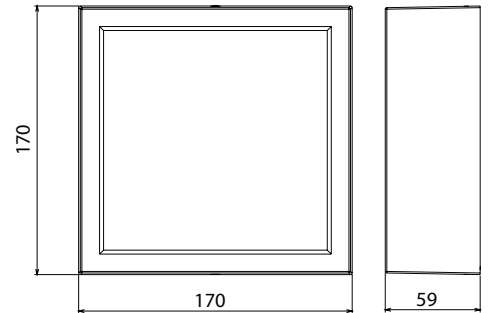


Round 8W

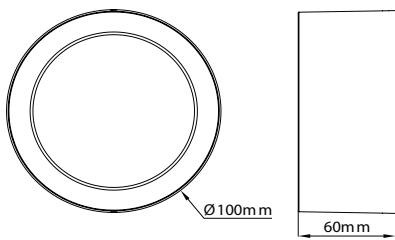


Round 12W/15W

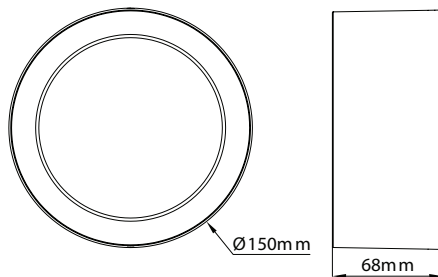


Round 18W

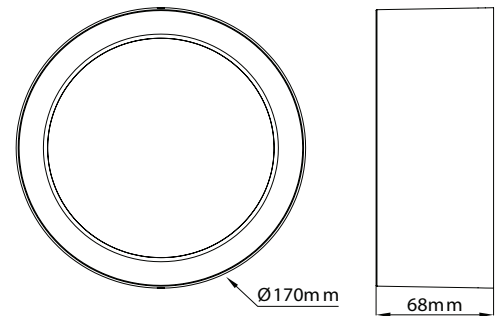


8W

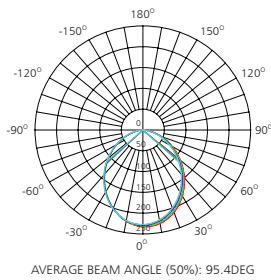


12W

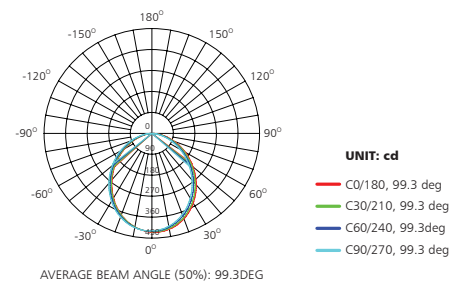

15W

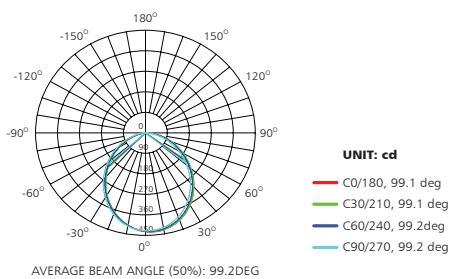

18W

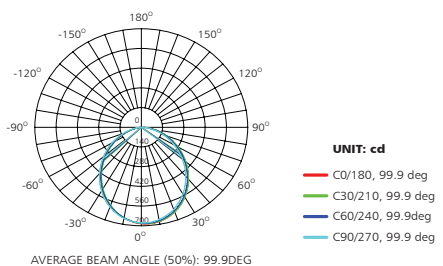



## IP54

waterproof structural design, it is an ideal replacement for damp location



## IP54

waterproof structural design, it is an ideal replacement for damp location



# PMMA

diffuser with even light output

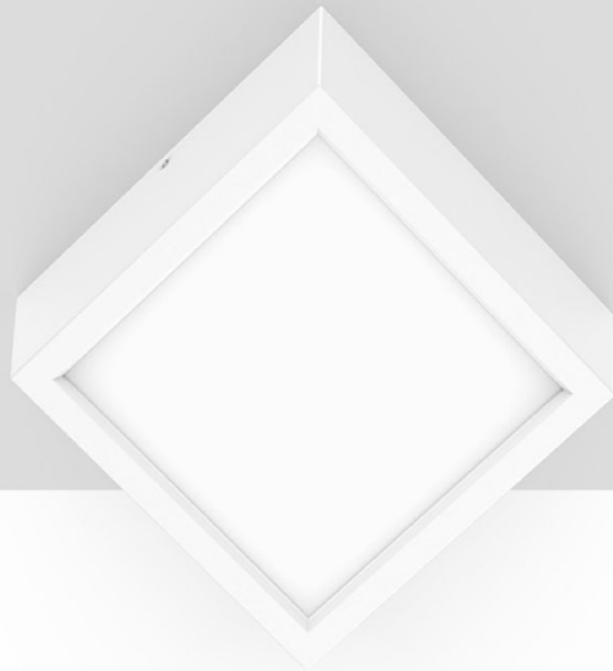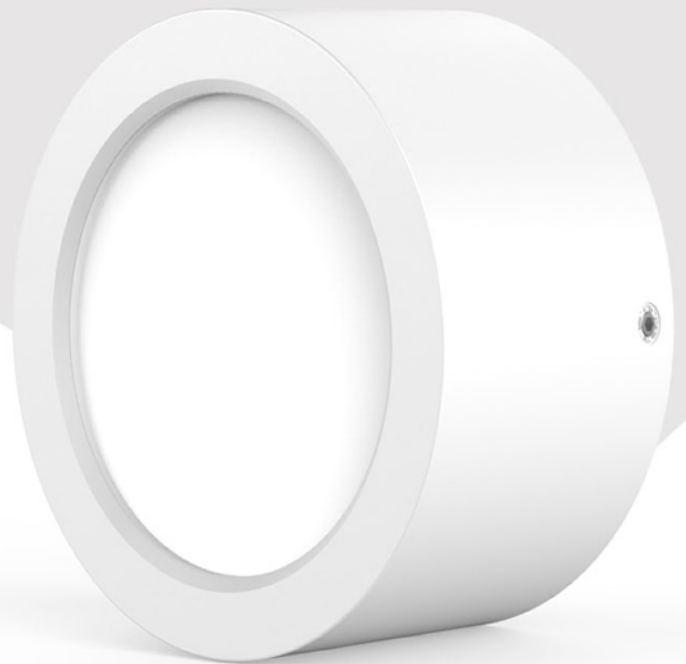

# PMMA

diffuser with even light output



**greenlux**  
cost reduction LED lighting

# Honour Series surface Mounted LED Downlight



## Product Range

Model#	Dimensions (mm)	Shape	Beam Angle	CCT	Lumens	Wattage	LED	Dimmer (option)
GUHON-8W-S	100*100*59	Square	90°	3000-6000k	696	8W	SMD	Triac
GUHON-15W-S	150*150*59	Square	90°	3000-6000k	1365	15W	SMD	Triac
GUHON-18W-S	170*170*59	Square	90°	3000-6000k	1692	18W	SMD	Triac
GUHON-8W-R	Ø100*60	Round	90°	3000-6000k	744	8W	SMD	Triac
GUHON-12W-R	Ø150*68	Round	90°	3000-6000k	1140	12W	SMD	Triac
GUHON-15W-R	Ø150*68	Round	90°	3000-6000k	1380	15W	SMD	Triac
GUHON-18W-R	Ø170*68	Round	90°	3000-6000k	1782	18W	SMD	Triac