



**greenlux**  
cost reduction LED lighting

# Rubix Series 02 Recessed LED Downlight

Available in Multiple Wattage  
80% lumen maintenance at 50,000 hours

- No UV or IR rays. No mercury
- Designed to replace standard square recessed halogen fixtures
- High lumen output
- High quality SMD Chipset
- High quality Die Cast Aluminium Base and body
- High quality Diffused Lens for even light distribution
- Triac dimmer system
- IP20 Rating, IP44 for option
- 3 Years Warranty
- Applications include offices, shopping centres, schools, hotels, restaurants, workshops, warehouses & household



## Specifications

<b>Colour Range</b>	3000 ~ 6000k
<b>Power Consumption</b>	13W / 25W
<b>Lumen Efficiency</b>	925lm / 1880lm
<b>Input Voltage</b>	AC 100V/240V 200V/240V
<b>PF</b>	>0.9
<b>Beam angle *10%</b>	90°
<b>Chipsets</b>	SMD
<b>CRI</b>	>80
<b>Dimmable</b>	Triac (standard) 0-10V & Dali (option)
<b>IP Rating</b>	IP20 IP44 (option)

## Dimensions & Materials

<b>Product Dimensions (mm)</b>	13W	110*110*44
	25W	190*190*54
<b>Cutout (mm)</b>	13W	Ø90*90
	25W	Ø160*160
<b>Housing Material</b>	Diecast Aluminum + PMMA Diffuser	
<b>Housing Colour</b>	White/Silver	

## Certification and Safety

<b>Certifications</b>	IP20, CE, RoHS, SAA, RCM
<b>Environment</b>	Indoor Location
<b>Warranty</b>	3 years






**greenlux**  
cost reduction LED lighting

# Rubix Series 02 Recessed LED Downlight


Available in Multiple Wattage  
80% lumen maintenance at 50,000 hours

## Dimensions


13W

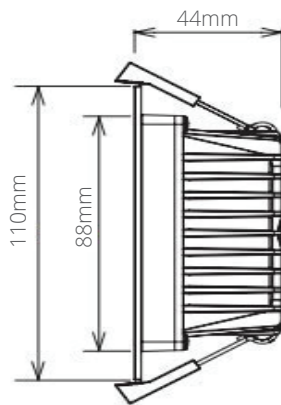

25W

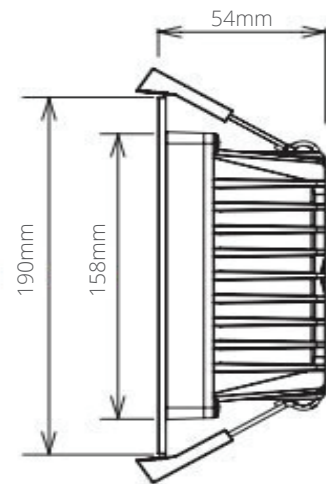

### Light CCT Guide

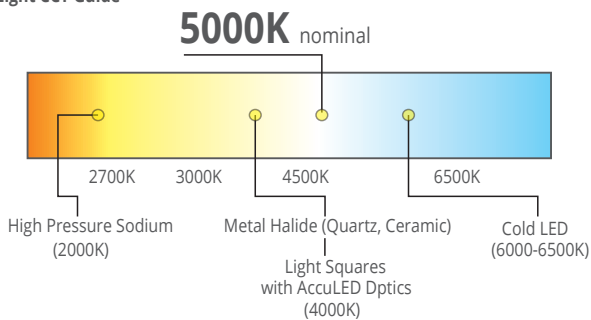

## Model

Model#	Dimensions (mm)	Cutout (mm)	Beam Angle	CCT	Lumens	Wattage	LED	Dimmer
GURUB-13W	110*110*44	Ø90*90	90°	3000-6000k	925	13W	SMD	Triac
GURUB-25W	190*190*54	Ø160*160	90°	3000-6000k	1880	25W	SMD	Triac