



greenlux
cost reduction LED lighting

Vegas Series **Gimbal** LED Downlight

Available in Multiple Wattage
80% lumen maintenance at 50,000 hours

- No UV or IR rays. No mercury
- Triac dimmable system
- Superb dimming effect
- SMD LED chips with high luminous flux
- PMMA diffuser to ensure even light output
- Compact, high efficiency line driver included
- Super slim design
- IP20 Rated
- 3 Years Warranty
- Applications include ceilings, walkways, restaurants, hotels, museums & display cases

Specifications

Colour Range	3000-6000k
Lumen Efficiency	95lm/W
Power Consumption	10W/13W
Input Voltage	AC 100-240V 200-240V
Current	250mA
Operating Temp.	-10°C to 45°C
Dimming Range	10% ~ 100%
Beam angle	90°
Ra	>85
Power Factor	>0.9
Chipset	2835 SMD
Driver	Class II
IP Rating	IP20
Dimmable	Triac (standard)



Dimensions & Materials

Product Dimensions (mm)	3"	Ø110*41.5
Cutout Dimensions (mm)	3"	Ø90-100
Housing Material	PMMA diffuser	
Housing Colour	White	

Certification and Safety

Certifications	CE, RoHS, SAA, RCM
Environment	Indoor Location
Warranty	3 years







greenlux
cost reduction LED lighting

Vegas Series **Gimbal** LED Downlight


Dimension & Photometrics

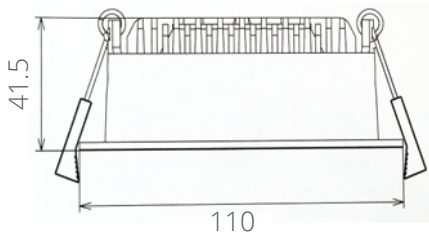




Model: GUVEG-10W-G

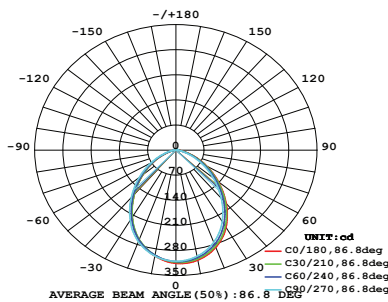

Model: GUVEG-13W-G

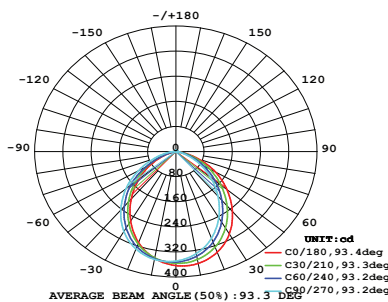

Light CCT Guide

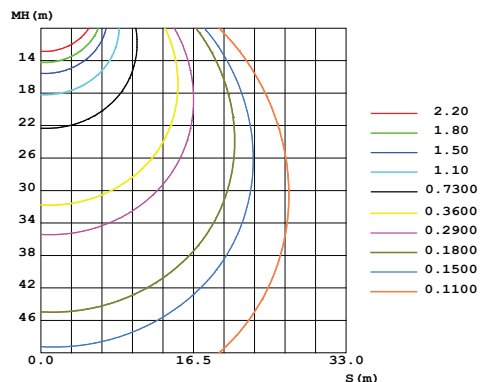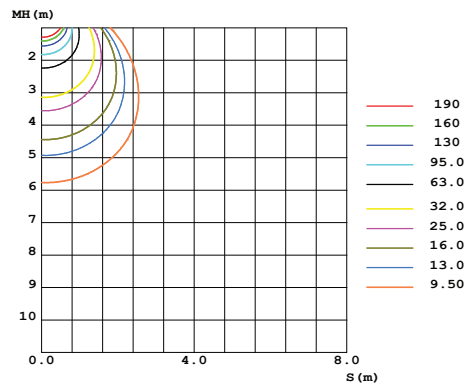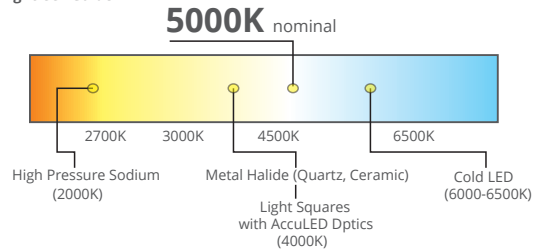

Model

Model#	CCT	LED Type	Lumen(lm)	Dimension (mm)	Cutout Size (mm)	Dimmable	Voltage(V)
GUVEG-10W-G 3"	3000K	2835 SMD	950	110*38	90-100	Triac	AC100-240V
GUVEG-13W-G 3"	4000K 5000K		1235	110*38	90-100	Triac	