

Giza 0257



Recessed LED Stair Light and Wall Light


LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics



B38




30° 40°



Outer Dimensions

Unit:mm

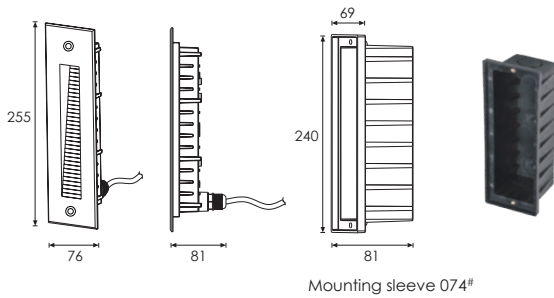


Mounting sleeve 074#

Material specifications

Housing	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12# Die-casting aluminum
Light Window	Tempered glass T=2mm
Cable gland	IP68 PG-9 PA66
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 074#
Dimmable Support	Triac PWM 1-10V Dali

Front Cover Color Option


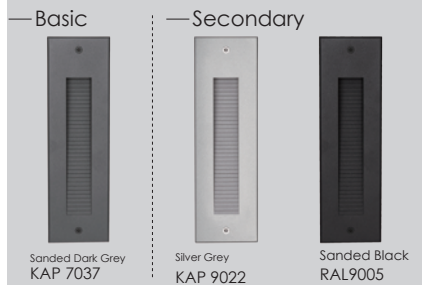


Mounting sleeve characteristic



- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.

Item	Light Source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK Rate
GKB1BG0257	2X1.5W	B38	30°	24V DC 120/240	2.4 V=150 120V= 36 240V= 22	2.4 V=3.6 120V=3.8 240V=3.8	Cool white=106 Warm white= 94	10

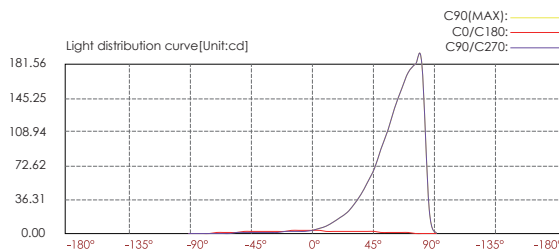

Center beam LUX	Beam width V	Beam width H
2m 0.71 LUX	1.2m	1.6m
4m 0.18 LUX	2.3m	3.2m
6m 0.08 LUX	3.5m	4.9m
8m 0.04 LUX	4.7m	6.5m
10m 0.03 LUX	5.9m	8.1m
12m 0.02 LUX	7.0m	9.7m

Ver.Spread:32.7 Horiz.Spread:44.2