



Asymmetrical
Recessed LED Stair & Wall Light
Front cover is made by Hard chrome-plated stainless steel 316L#



LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics



C11
L01 45°
35° F019HZ



C11



45°
35°

Outer Dimensions


Unit:mm



Mounting sleeve 076#

Material specifications

Housing	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Light Window	Step tempered glass.T=8mm
Cable gland	IP68 PG-9 PA66
Gasket	Tooling shaped seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 076#
Dimmable Support	Triac PWM 1-10V Dali

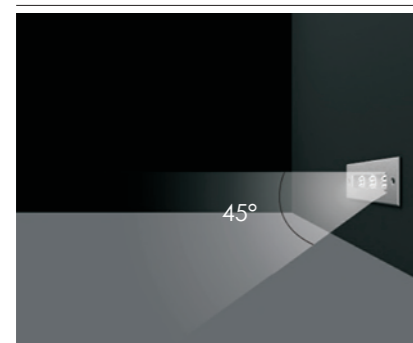


Impression drawing of lens

Mounting sleeve characteristic



- The right picture – the supporting plate "A" is used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A" from the mounting sleeve before the lamp installation.

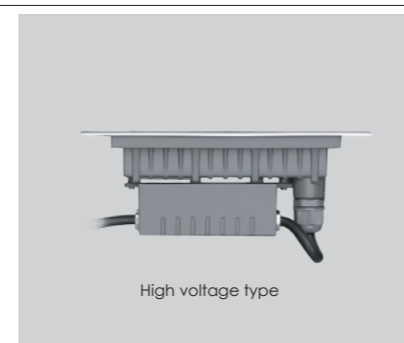

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
GKC1FL0357	3×2W OSRAM	C11	45° 35°	24VDC 120/240	24V = 200 120V = 47 240V = 25	24V = 5.70 120V = 5.60 240V = 5.70	Cool white =400 Warm white =285	08

