




Diffused Beam
Recessed LED Wall Light
Stainless Steel Front Cover

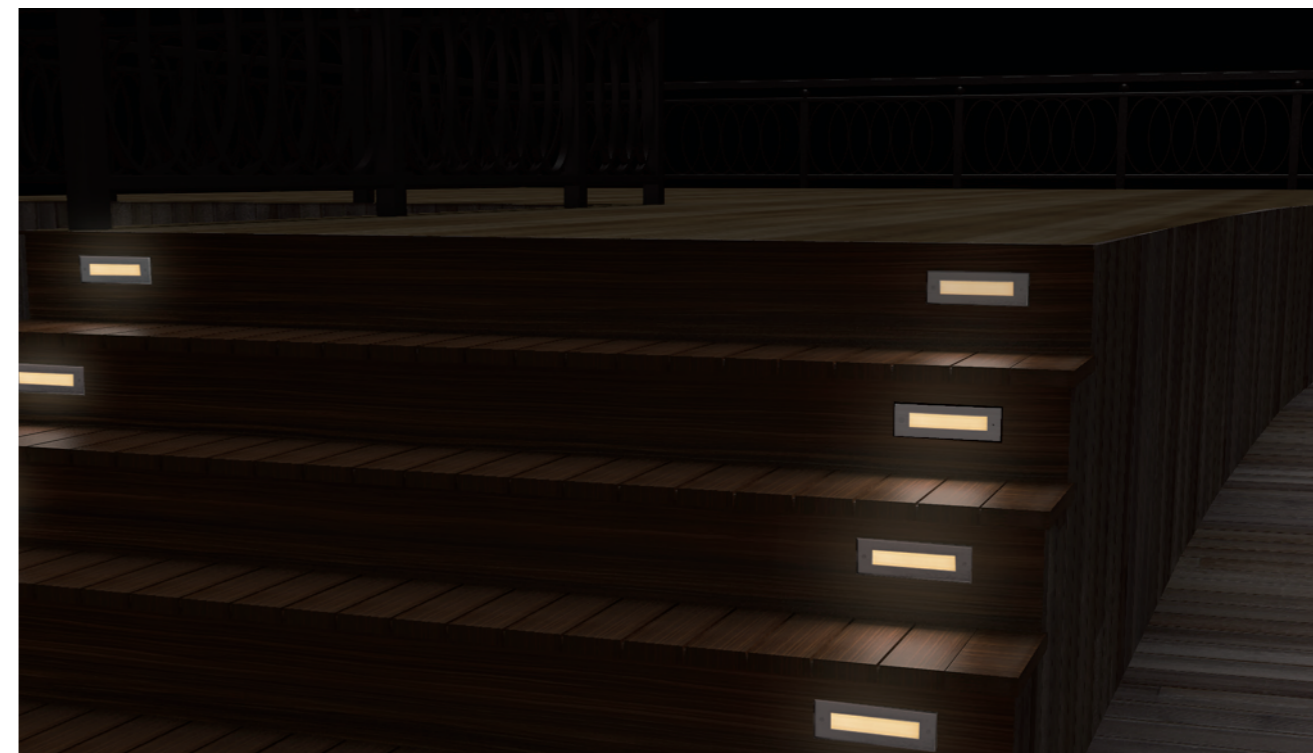


LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics

- N/A

Outer Dimensions

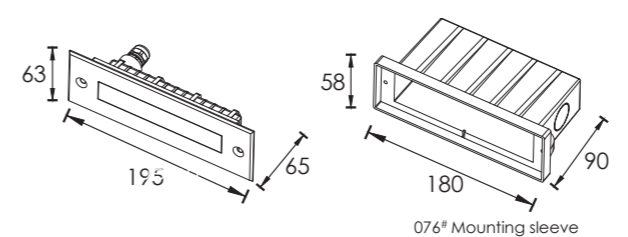

Material specifications

Housing	12# Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chrome-plated stainless steel SUS 316L#
Light Window	Step tempered glass, T=8mm
Cable gland	IP68 PG-9 PA66
Gasket	Tooling shaped seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 076#
Dimmable Support	Triac PWM 1-10V Dali

Mounting sleeve characteristic



•The Right picture – the supporting plate "A" is used for preventing deformation of the sleeve during the construction installation process.

•Please remove the supporting plate "A" from the mounting sleeve before the lamp installation.

Item	Light source	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
GKD1FL1014	10×SMD3030	120°	24V DC 120/240	24V = 114 120V = 55 240V = 32	24V = 2.7 120V = 3.5 240V = 3.6	Cool white =34 Warm white =35	09

