

# Giza 1807



## Recessed LED Stair Light and Wall Light

### LED Colour Temperature

- 2000K
- 3000K
- 6000K


### Optics

- N/A



### Outer Dimensions

Unit:mm

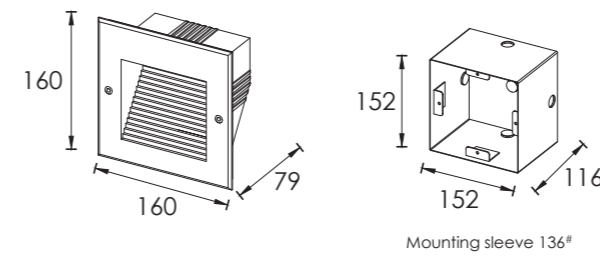





### Material specifications

Housing	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12# Die-casting aluminum <b>PI877U</b> powder coated T=20-30um, Adhesion of ISO class 1/ASTM class 4B
LED	<b>SMD3528</b> type power LED
Cable gland	IP67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage) H05RN-F 3X1.0mm <sup>2</sup> L=0.5m (high voltage)
Mounting sleeve	DIG1807: Zinc-coated steel 136#
Dimmable Support	<b>Triac PWM 1-10V Dali</b>

### Front Cover Color Option



Item	Light source	The manufacturer selected lens degree(°)Ø1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
<b>GKD1G1807</b>	18×SMD2835	120°	24V DC 120/240	24V = 50 120V = 27 240V = 17	24V = 1.2 120V = 1.7 240V = 1.8	Cool white =39 Warm white =34	10

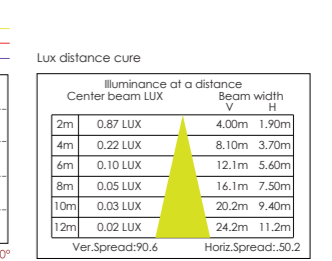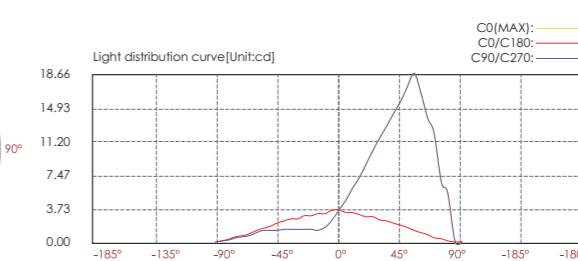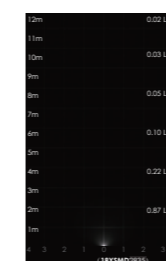

Application Demo