

## Recessed LED Stair Light & Wall light



### LED Colour Temperature

- 2000K
- 3000K
- 6000K

### Optics

- N/A

### Outer Dimensions Unit:mm



Mounting sleeve 074#

### Material specifications

Housing & Front cover	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Light Window	PC T=3mm
Cable gland	IP68 PG-9 PA66
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage) H05RN-F 3X1.0mm <sup>2</sup> L=0.5m (high voltage)
Mounting sleeve	ABS 074#
Dimmable Support	<b>Triac PWM 1-10V Dali</b>

### Front Cover Color Option

#### — Basic

Sanded Dark Grey  
KAP 7037



#### — Secondary


Silver Resistant Paint  
RAL 9006



Sanded Black  
RAL9005





### Mounting sleeve characteristic



- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
<b>GKD1BB5407</b>	54×SMD2835	24V DC 120/240	24V = 220 120V = 95 240V = 53	24V = 5.3 120V = 6.4 240V = 6.8	Cool white =47 Warm white =44	09

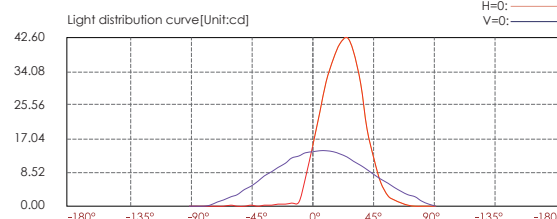

Center beam LUX	Beam width V	H
2m 3.84 LUX	3.20m	1.4m
4m 0.96 LUX	6.40m	2.9m
6m 0.43 LUX	9.70m	4.3m
8m 0.24 LUX	12.9m	5.7m
10m 0.15 LUX	16.1m	7.1m
12m 0.11 LUX	19.3m	8.6m