




## Asymmetrical Recessed LED Stair Light and Wall Light

LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics


- N/A

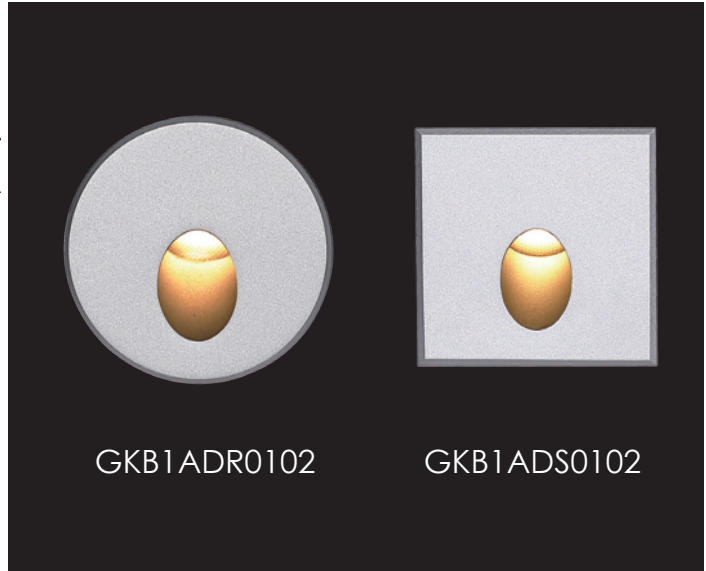

GKB1ADR0102

GKB1ADS0102


### Outer Dimensions

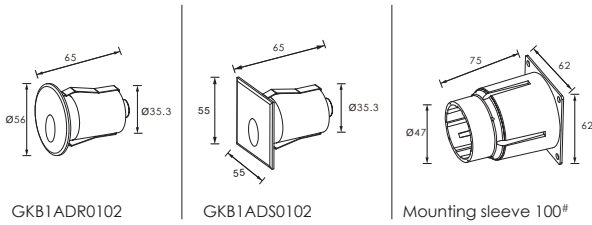

### Material specifications

Housing	12" Die-casting aluminum T=20-25µm. Adhesion of ISO class 1/ ASTM class 4B high temperature painting
Front cover	12" Die-casting aluminum
Light Source	OSRAM
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm <sup>2</sup> L=0.3m (low voltage)
Mounting sleeve	ABS 100#
Dimmable Support	<b>Triac PWM 1-10V Dali</b>


### Beam effect demo



Wall recessed



Installation with clips embedded into sleeve, fix on the concrete wall





Installation with clips directly

### Front Cover Color Option

Sanded Brown RAL8019	Silver Resistant Paint RAL9006	Sanded Black RAL9005

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
<b>GKB1ADR0102</b>	1×2W	L0180C010AR	50°	24V DC	100	2.4	Cool white =54 Warm white =49	10
<b>GKB1ADS0102</b>	1×2W	L0180C010AR	50°	24V DC	100	2.4	Cool white =54 Warm white =49	10

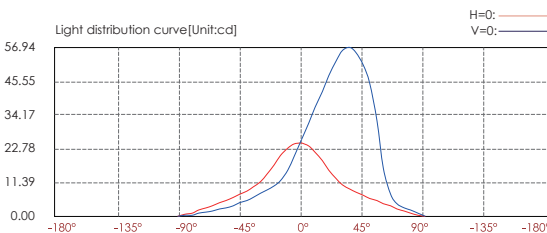

Center beam LUX	Beam width V	H
6.20 LUX	1.6m	2.00m
1.55 LUX	3.2m	4.10m
0.69 LUX	4.8m	6.10m
0.39 LUX	6.4m	8.10m
0.24 LUX	8.0m	10.1m
0.17 LUX	9.6m	12.2m

Ver.Spread:43.7 Horiz.Spread:53.8