


Giza HA1034



GKD1HA1034

GKD1HB1034

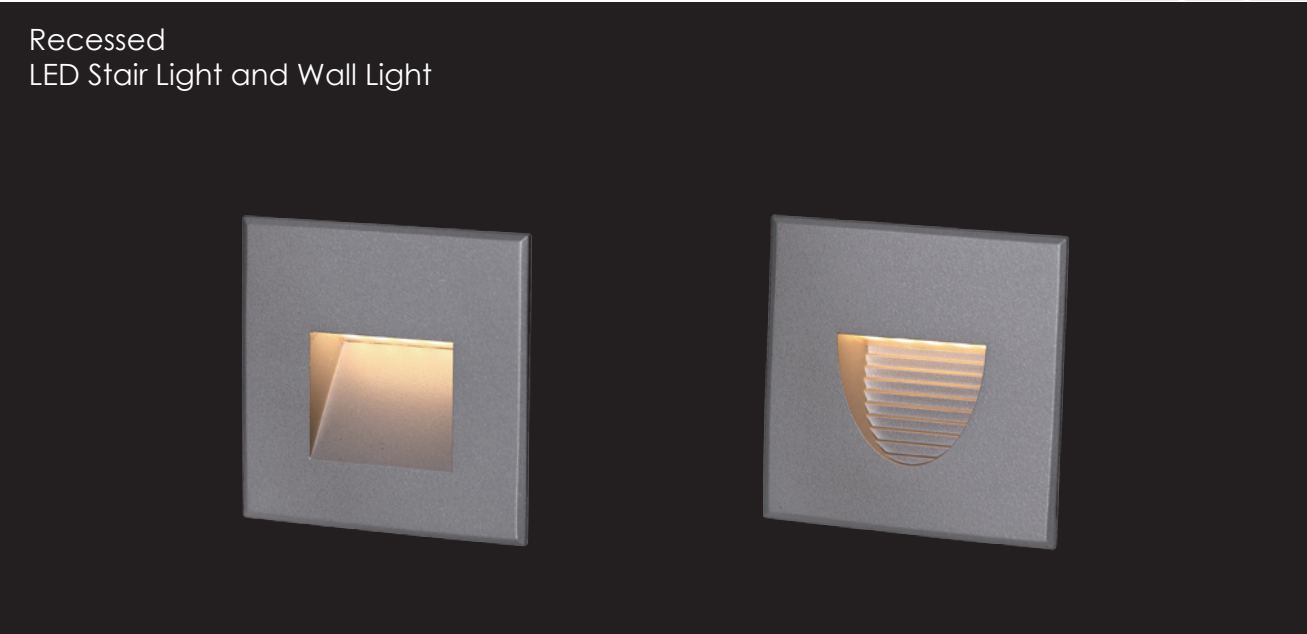

LED Colour Temperature


- 2000K
- 3000K
- 6000K

Optics

- N/A

Outer Dimensions


Unit:mm

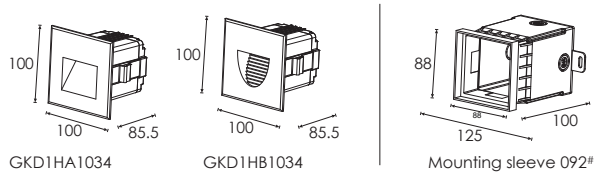


Material specifications

Housing	12# Die-casting grey powder coated aluminum, T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12# Die-casting aluminum RAL7037 powder coated T=60-80um.Adhesion of ISO class 1/ASTM class 4B;
LED	SMD3030 type LED
Cable gland	IP67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 092#
Dimmable Support	Triac PWM 1-10V Dali

Front Cover Color Option	
—Basic	
Sanded Dark Grey KAP 7037	
—Secondary	
Silver Grey KAP 9022	
Sanded Black RAL9005	

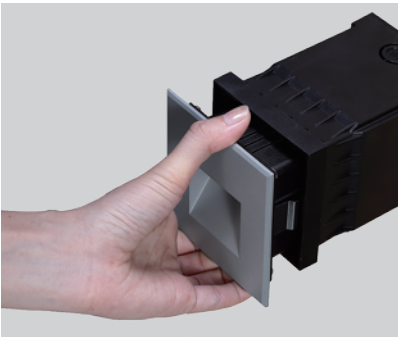

The clips have been specially modified and upgraded to have a stronger structure in order to make up the absence of the screw fixing.

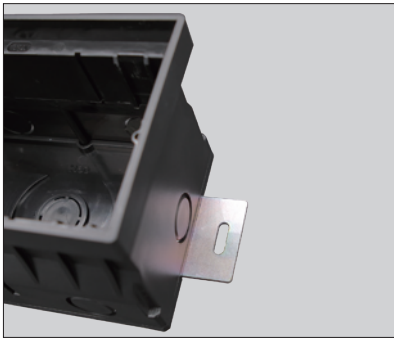

There are two metal support plates on the bottom of the sleeve. It is used for fixing and preventing the mounting sleeve shifting while filling the concrete. These will simply installer and electrician while they are recessing the sleeves.

