



Recessed  
LED Stair Light and Wall Light  
Stainless steel front cover with Matt Surface



GKB1SR0101



GKB1SS0101



Application Demo


LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics

- N/A

Outer Dimensions

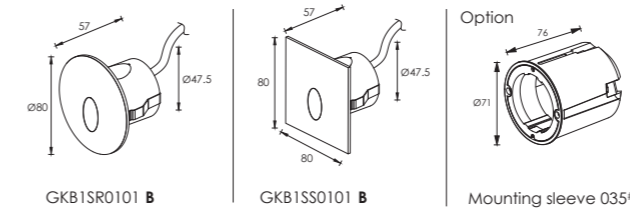


Material specifications

Housing	Molding shaped stainless-steel SUS 316L
Light Source	OSRAM
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage) H05RN-F 3X1.0mm <sup>2</sup> L=0.5m (high voltage)
Mounting sleeve	ABS 035#
Dimmable Support	Triac PWM 1-10V Dali

Beam effect demo



Wall recessed

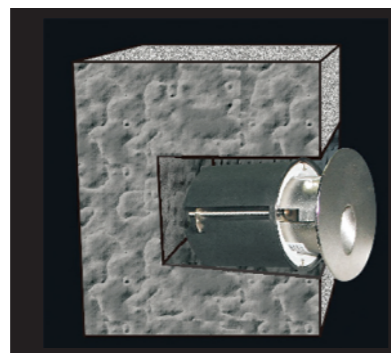

Installation with clips embedded into sleeve, fix on the concrete wall



Installation with clips directly

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
○ GKB1SR0101 B	1×1W	L0180C010AR	80°	24V DC 120/240	24V = 59 120V = 26 240V = 16	24V = 1.46 120V = 1.70 240V = 1.70	Cool white=51 Warm white=46	10
□ GKB1SS0101 B	1×1W	L0180C010AR	80°	24V DC 120/240	24V = 59 120V = 26 240V = 16	24V = 1.46 120V = 1.70 240V = 1.70	Cool white=51 Warm white=46	10

