



greenlux
cost reduction LED lighting

Ray Series 01 LED Street Light

Available in Multiple Wattage
80% lumen maintenance at 50,000 hours

- Class II electric insulation
- Double photomnum diffuser technology
- Supper white toughened glass
- Sealed lamp housing
- High quality die-casting aluminium housing
- High lumen output 100lm/W
- High efficiency Cree LED chipset
- Photocell sensor available
- IP65 Rated for external use
- Applications include streets, gardens, parks, and commercial sites

Specifications

Colour Range	3000 ~ 6500k
Power Consumption	30W / 45W / 55W
Product Dimensions (mm)	635*270*174 (L*W*H)
Lumen	2940lm ~ 5390lm
Input Voltage	AC 100-277V 50/60Hz
Beam angle	160°
CRI	>75
Power Factor	>0.95
Chipset	Cree
Pipe Diameter	48mm
Driver	Mean Well / Philips
Housing Color	Black / Grey







greenlux
cost reduction LED lighting

Ray Series 01 LED Street Light

Dimensions & Photometrics

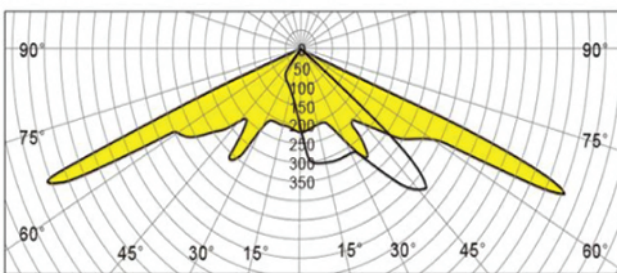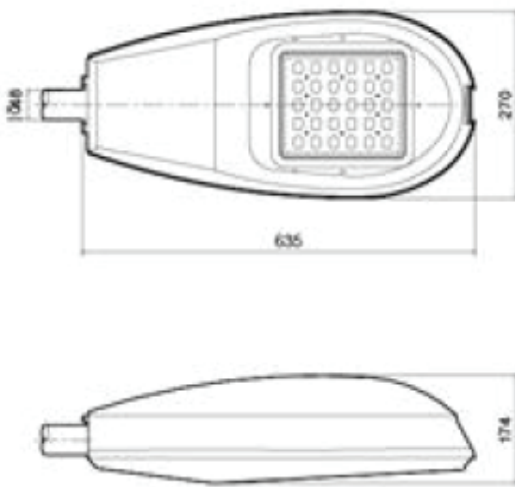

MODEL	Beam Angle (°)	Wattage (W)	Voltage (V)	LED	CCT (k)	Lumen	Pipe Diameter (mm)	Size (mm) (LxWxD)	Surface Colour
GYRAY-35W-01	160	35W	100/277	Cree	3000-6500	2940	48	635*270*174	Black Grey
GYRAY-45W-01		45W				4400		635*270*174	
GYRAY-55W-01		55W				5390		635*270*174	