



greenlux
cost reduction LED lighting

Safe 01 Series LED Street Light

- Adjustable interface diameter, from Ø48mm to Ø76mm
- Adjustable elevation angle
- 1-10V Intelligent Dimming Interface with optional after-midnight powerdown function
- Photocell sensor option
- Patent double anti-thunder design, to ensure the LED street light works well in bad weather
- Self-cleaning system, easy maintenance with independent chambers for light source and driver
- High quality Aluminum Alloy housing, anti-static coating
- Built-in thermal management system manages heat dissipation
- Multi-angle installation design
- Anodized Aluminum heat sink for superior thermal conductivity
- Applications include carparks, streets, tunnels, petrol stations, tennis court and stadiums

Specifications

Colour Range	3000-6500k
Power	65W ~ 275W
Lumen Efficiency	100 ~ 115lm/W
Effective Illuminated Area	H6/26*8m H8/37*10m H10/45*12m H12/53*15m
Input Voltage	120-277V 47-63Hz
Dimmable	0-10V (option)
Power Factor	>0.95
Beam angle	120°
CRI	> 75 Ra
IP Rating	IP66
Driver	Mean Well & Inventronics
LED Chipset	Philips, Lumileds & Cree



Dimensions & Materials

Product Dimensions (mm)	65W	500*300*135
	95W	565*300*135
	125W	630*300*135
	155W	695*300*135
	185W	760*300*135
	215W	825*300*135
	245W	890*300*135
	275W	955*300*135
Material	Die-casting Aluminium + PC & Stainless Steel Fitting	
Lens	UV Protection PC Lens	
Housing Colour	Grey / Black	

IES

LM80

RCM

SAA

IP66


TUV

CE

5 Yrs
Warranty

Safe 01 Series LED Street Light


Product Features & Dimensions

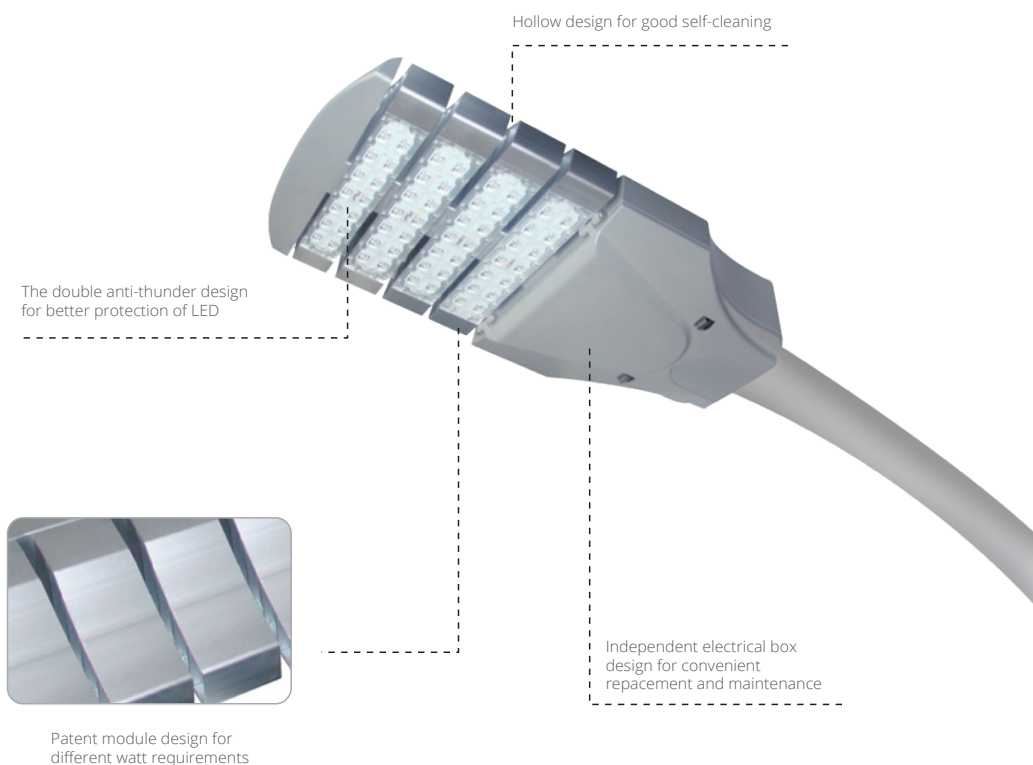

Adjustable Elevation Angle



Double Anti-Thunder Design



Efficient Cooling System




Different Interface Sizes




Control Equipment


65W 500*300*135




95W 565*300*135




125W 630*300*135




155W 695*300*135




185W 760*300*135




215W 825*300*135



245W 890*300*135



275W 955*300*135








greenlux
cost reduction LED lighting

Safe 01 Series LED Street Light


Photometrics

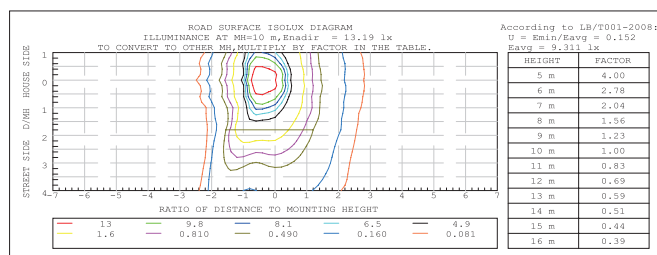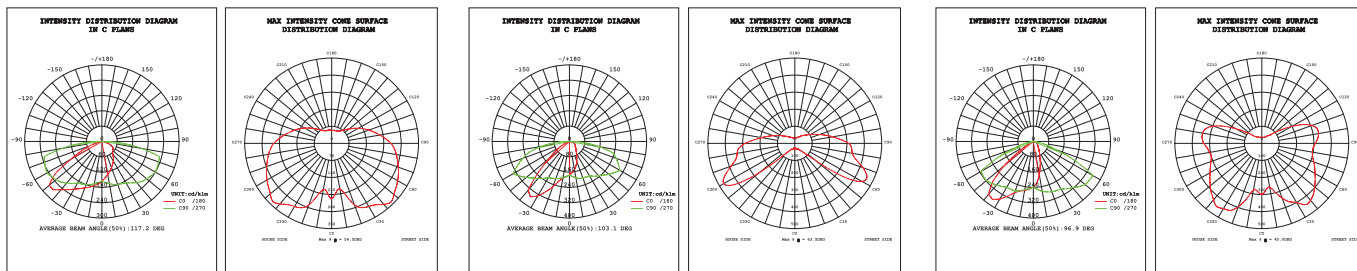


65W H10M

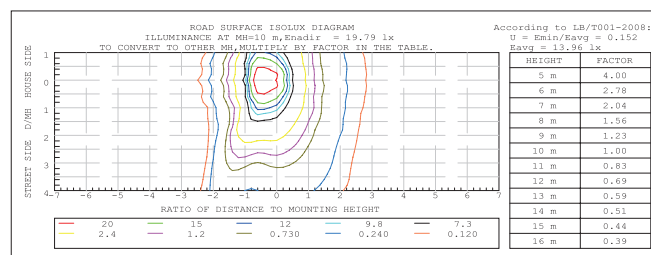


95W H10M

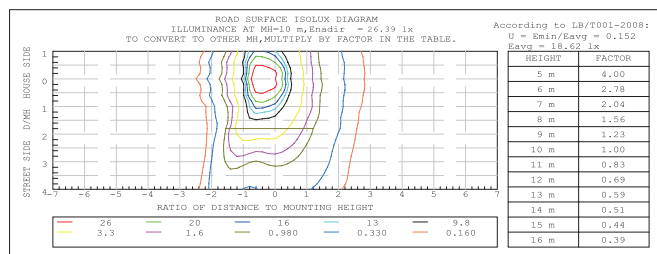


125W H10M

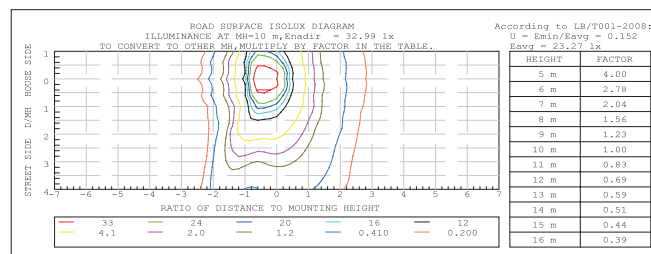


155W H10M

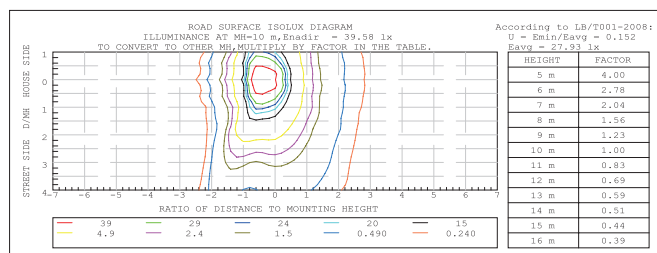


185W H10M

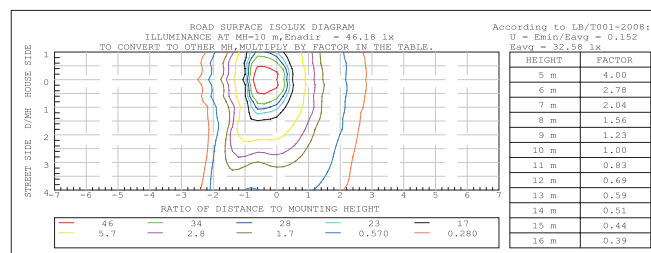

215W H10M

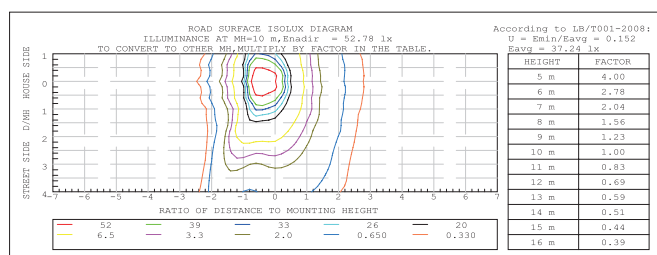

245W H10M

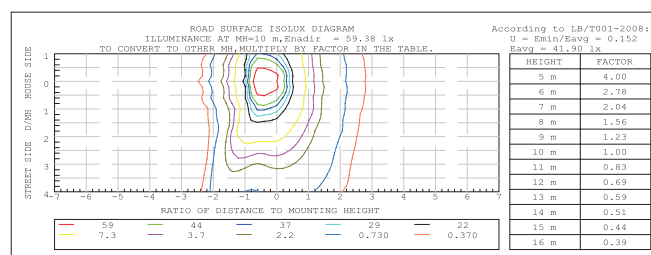

275W H10M

Safe 01 Series LED Street Light

Product Range

Model#	Dimension	Beam Angle	CCT	Lumens	Wattage	LED
GMSAF-65W-01	500*300*135	120°	3000-6500k	7475	65W	Philips Lumileds & Cree
GMSAF-95W-01	565*300*135	120°	3000-6500k	10925	95W	Philips Lumileds & Cree
GMSAF-125W-01	630*300*135	120°	3000-6500k	14375	125W	Philips Lumileds & Cree
GMSAF-155W-01	695*300*135	120°	3000-6500k	17825	155W	Philips Lumileds & Cree
GMSAF-185W-01	760*300*135	120°	3000-6500k	21275	185W	Philips Lumileds & Cree
GMSAF-215W-01	825*300*135	120°	3000-6500k	24725	215W	Philips Lumileds & Cree
GMSAF-245W-01	890*300*135	120°	3000-6500k	28175	245W	Philips Lumileds & Cree
GMSAF-275W-01	955*300*135	120°	3000-6500k	31625	275W	Philips Lumileds & Cree

