



greenlux
cost reduction LED lighting

Flexi Series **2216** LED Strip Light



- High brightness LED strip light
- Available in multiple wattages and lengths
- Shortest cuttable length is 12.5mm
- High lumen efficiency 85lm/W
- IP20 / IP40 / IP65 / IP68 rating options
- Bright and even light output
- High quality 2216 SMD chipset
- 120° Beam Angle
- 12V or 24V DC Input Voltage options
- Minimal heat generation
- Dimming options
- Available in 5m/roll as standard
- Accessories included
- Application includes offices, shopping centres, hotels, restaurants, museums, public areas & households

Specifications

Colour Range	3000-6000k
Power Consumption (W/m)	9.6W & 19.2W
Input Voltage	12V / 24V DC
LED Quality	120 / 240
IP Rating	IP20 / IP64 / IP65 / IP68
CRI	>90
Beam angle	120°
Chipset	SMD 2216
Length	5m/roll (Standard)





greenlux
cost reduction LED lighting

Flexi Series 2216 LED Strip Light

Accessories


Model								
2216	✓	✓	✓			✓	✓	✓

Note: If you want to order ETL version, the wire could be different



IP64	Slim PU Glue Potted		
IP65	PU Glue Potted		
IP65	Silicon Sleeved		
IP68	Silicon Extrusion and Glued		

Dimensions

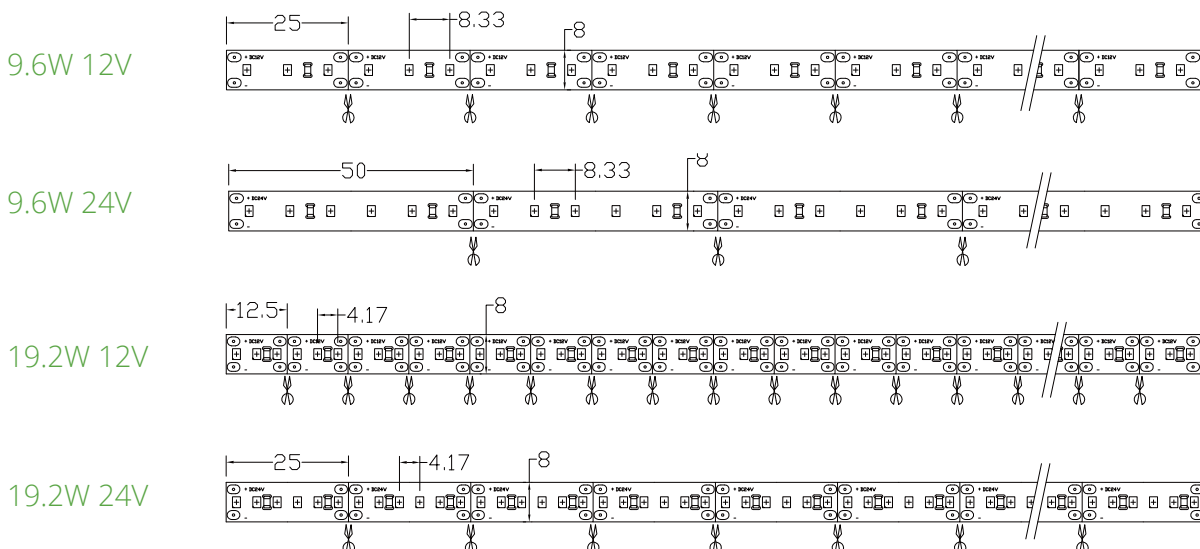





greenlux
cost reduction LED lighting

Flexi Series 2216 LED Strip Light


Installation

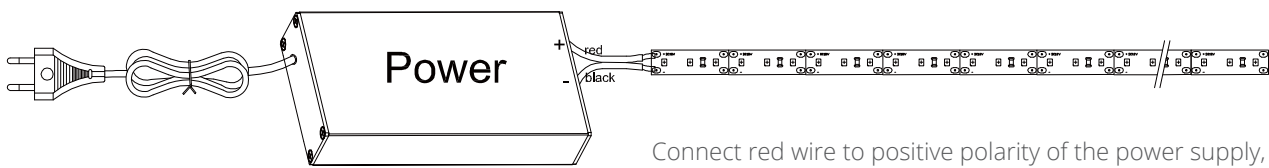

Connect red wire to positive polarity of the power supply, then connect black wire to negative polarity

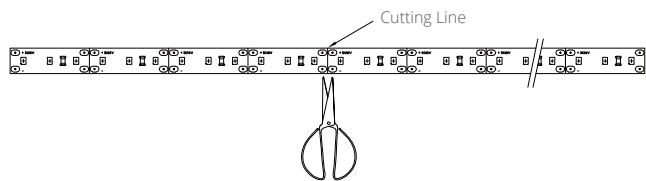

Strip may be cut to desired length according to the cutting line

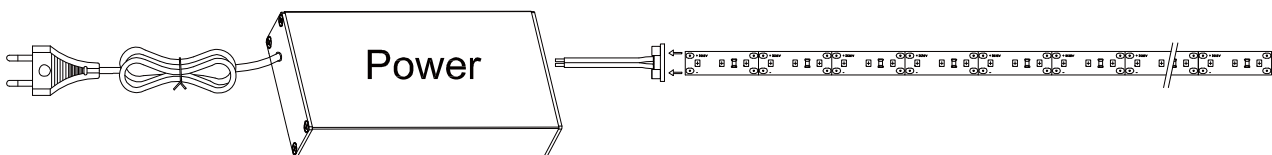

Cutted Strip could be connected via accessory connector, then connected to power supply

Model

Model	Colour	Lumen	LED Type	LED Qty. (leds/m)	Beam Angle (°)	DC Voltage (V)	Wattage (W/m)	CRI	IP
GSFLE-9.6W-2216	5500-6500k	830	SMD 2216	120	120	12/24	9.6	>90	20/64/65/68
	3850-4500k	790							
	2700-3200k	720							
GSFLE-19.2W-2216	5500-6500k	1630	SMD 2216	240	120	12/24	19.2	>90	20/64/65/68
	3850-4500k	1530							
	2700-3200k	1400							