



greenlux
cost reduction LED lighting



Industry Series 04 LED Outdoor Bollard Light

Available in Multiple Wattage
80% lumen maintenance at 50,000 hours

- UV proof lamp cover with sealed lamp housing
- Class II electric insulation
- High purity grade aluminium reflector
- High quality die-casting aluminium housing with electrostatic powder coating
- High lumen output 75lm/W
- IP65 Rated for outdoor environment
- Applications include gardens, lawns, parks, and commercial sites

Specifications

Colour Range	3000 ~ 6500k
Power Consumption	8W / 10W / 15W
Product Dimensions (mm)	Ø170* 1000 (L*W*H)
Lumen	600 / 750 / 1125lm
Input Voltage	AC 100-240V
Beam angle	360°
CRI	>75
Power Factor	>0.95
Chipset	Cree
Driver	Mean Well
Housing Color	Black / Grey

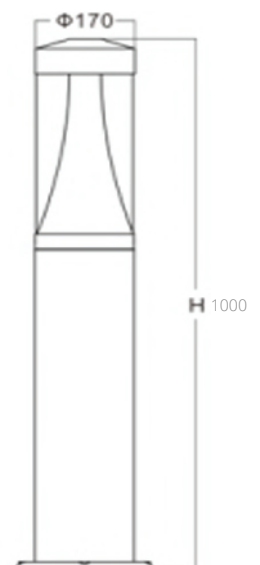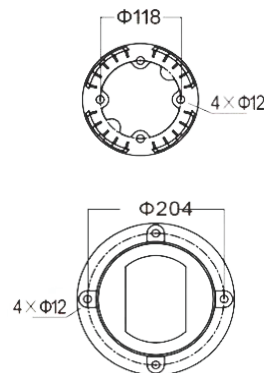



greenlux
cost reduction LED lighting

Industry Series 04 LED Outdoor Bollard Light

