

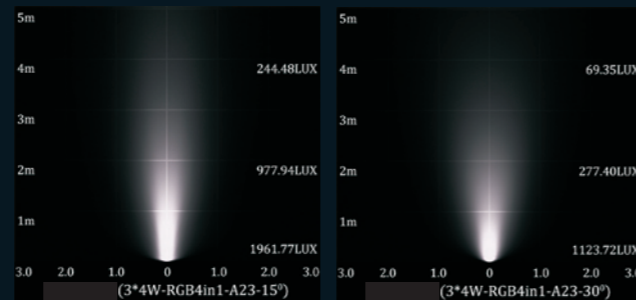


# Inground Series 02

## Four Colour Mixing LED Inground Light

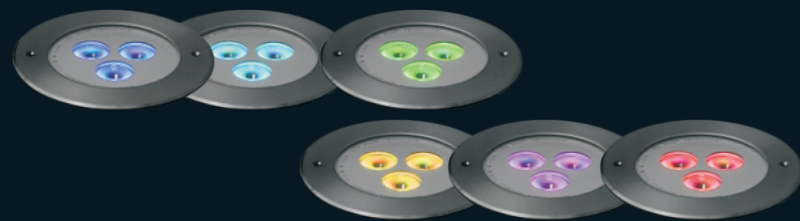

RED GREEN BLUE WHITE

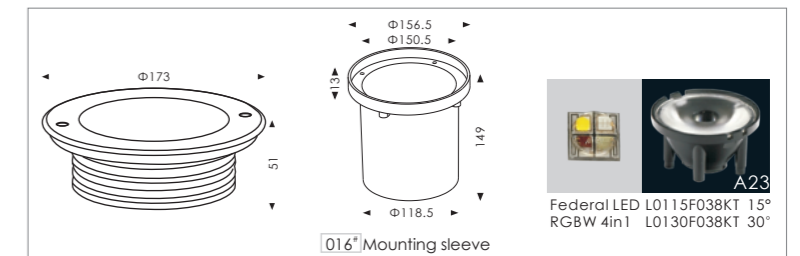

### Specifications

|                         |  |
|-------------------------|--|
| Housing                 | 12" Die-casting grey powder coated aluminum.<br>T=60-80µm. Adhesion of ISO class 1/ASTM class 4B |
| Front cover             | Stainless steel SUS 316L*  |
| Glass                   | Step tempered white coating glass. T=8mm   |
| Glass pressure capacity | Full area=2274kgs  |
| Cable gland             | IP-68 PG-9 PVC   |
| Gasket                  | Molding shaped silicone seal   |
| Driver                  | Constant current output<br>RGBW 4in1 LED=6-circuit output  |
| Operating temperature   | -20°C ~40°C  |
| Mounting sleeve         | PVC 016"   |
| Power cable             | H05RN-F 6×0.5mm <sup>2</sup> L×0.5m  |

| Item No.     | Light source   | Lens | The manufacturer selected lens degree (θ/1/2) | Input voltage(v) | Typical operating current(mA) | Typical consumption(w) | Typical luminance (lm) | IK rate |
|--------------|----------------|------|---|------------------|-------------------------------|------------------------|------------------------|---------|
| GKING-12W-02 | 3×4W RGBW 4in1 | A23  | 30  | 24VDC            | 610                           | 14.6                   | 430                    | 08      |