



Inground Series 04

COB LED Inground Light

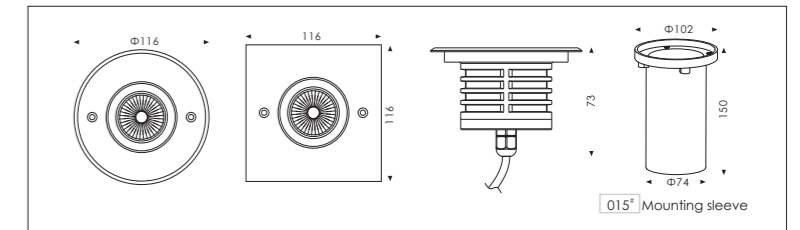

Specifications

Housing	12° Die-casting grey powder coated aluminum, T=60-80μm Adhesion of ISO class 1/ASTM class 4B
Front ring	Stainless steel SUS 316L
Glass	Step tempered glass, T=8mm
Glass pressure capacity	Full area=2578kgs
Reflector	Optical Reflector efficiency ≥ 90%
Cable gland	IP-68 PG-9 PVC
LED	Multi chip on board LED
PCB	Excellent heat conductivity aluminum, coefficient of heat Conductivity ≥ 2.0w /mk
Driver	Constant current output
Operating temperature	-20℃~40℃
Power cable	H05RN-F 2×1.0mm ² L=0.5M (low voltage) H05RN-F 3×1.0mm ² L=0.5M (high voltage)
Mounting sleeve	PVC 015'

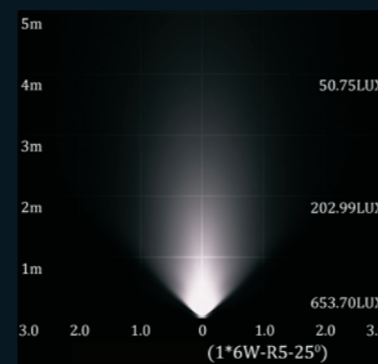

Item No.	Light source	Reflector	The manufacturer selected reflector degree (θ/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
G KING-6W-04-R	1 × 6W SHARP COB	R5	25	24VDC 120/240	24V=270 120V=110 240V=60	24V=6.5 120V=7.6 240V=7.6	Cool white=427 Warm white=358	09
G KING-6W-04-S	1 × 6W SHARP COB	R5	25	24VDC 120/240	24V=270 120V=110 240V=60	24V=6.5 120V=7.6 240V=7.6	Cool white=427 Warm white=358	09