

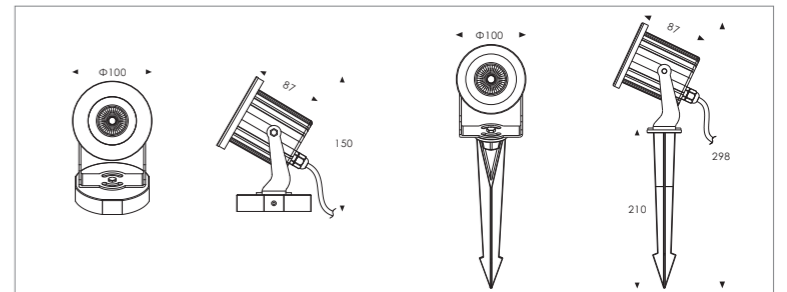


Landscape 02 LED Spot Flood Light Single Colour

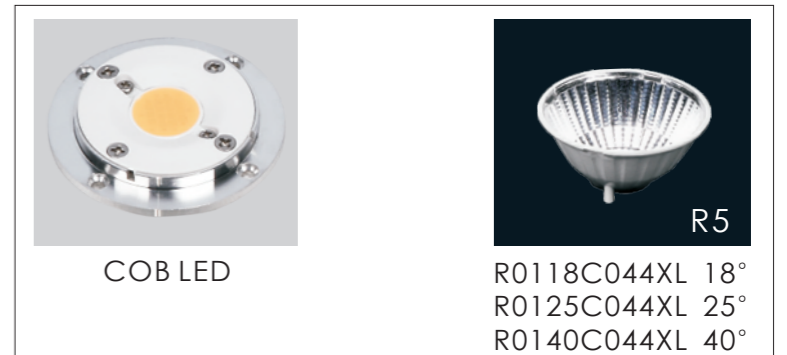

Material specifications

Housing	12" Die-casting grey powder coated aluminum . T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Front cover	Stainless steel (SUS 304', 316' optional)
Bracket	Powder coated aluminum
Glass	Tempered glass.T=4mm
LED	COB LED 6W
Reflector	Optical Reflector efficiency ≥90%
Cable gland	IP-68 PG-9 PVC
Gasket	Tooling shaped seal
Power cable	24V:L=2.0M H05RN-F 2×1.0mm ² 100/240V: L=2.0M H05RN-F 3×1.0mm ²
Spike	PVC
Mounting base	12" Die-casting grey powder coated aluminum



Item No.	Light source	Reflector	The manufacturer selected reflector degree (θ/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
GKLAN-6W-A-02	1×6W BRIDGELUX COB	R5	40	24VDC 120/240	24V=270 120V=110 240V=60	24V=6.5 120V=7.6 240V=7.6	Cool white=409 Warm white=349	04
GKLAN-6W-B-02	1×6W BRIDGELUX COB	R5	40	24VDC 120/240	24V=270 120V=110 240V=60	24V=6.5 120V=7.6 240V=7.6	Cool white=409 Warm white=349	04