


Landscape 07 LED Spot Garden Light RGB

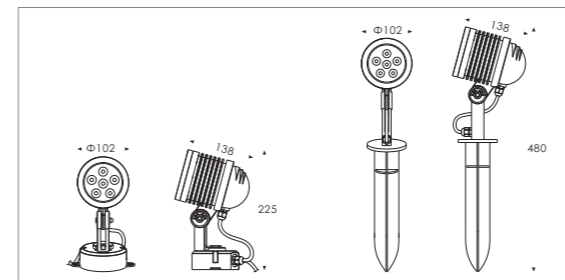

Material specifications

Housing	12' Die-casting powder coated aluminum , T=60-80um Adhesion of ISO class 1/ASTM class 4B
Glass	Tempered glass, T=4mm
Lens	Optical lens, efficiency ≥ 85%
Cable gland	IP-68 PG-9 copper and nickel coated
Gasket	Molding shaped silicone double seal
LED	10 type power LED for RGB, single color is OSRAM
PCB	Excellent heat conductivity aluminum, coefficient of heat conductivity ≥ 2.0w/mk
Driver	Constant current output Single color LED=1-circuit output RGB 3in1 LED =3-circuit output
Operating temperature	-20°C ~ 40°C
Power cable	H05RN-F 2X1.0mm ² L=2m (low voltage) H05RN-F 3X1.0mm ² L=2m (high voltage) H05RN-F 5X0.5mm ² L=2m (for RGB)
Spike	PVC
Mounting base	Powder coated die-casting aluminum

Item No.	Light source	Lens	The manufacturer selected lens degree (θ/12)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
GKLAN-9W-A-07	6 × 1.5W	B33D	20	24VDC 120/240	24V=550 120V=89 240V=52	24V=13.2 120V=10.5 240V=10.5	Cool white=1004 Warm white=775	05
GKLAN-12W-A-07	6 × 2W	B34D	30	24V DC	R=210 G=260 B=260	17.5	364	05
GKLAN-9W-B-07	6 × 1.5W	B33D	20	24VDC 120/240	24V=550 120V=89 240V=52	24V=13.2 120V=10.5 240V=10.5	Cool white=1004 Warm white=775	05
GKLAN-12W-B-07	6 × 2W	B34D	30	24V DC	R=210 G=260 B=260	17.5	364	05

