


# Landscape 09 LED Flood Light RGB

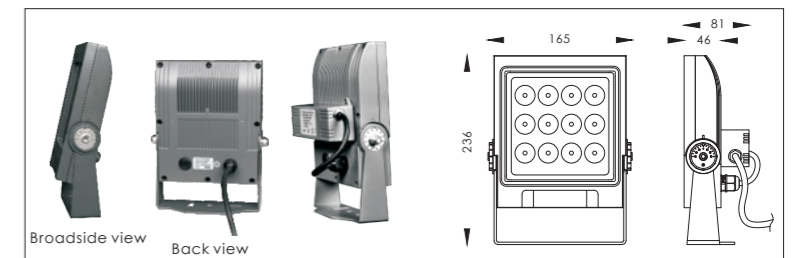

## Specifications

Housing	12' Die-casting powder coated aluminum . T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Bracket	Powder coated aluminum
Glass	Tempered glass. T=7mm
Lens	All-in-one optical lens, efficiency≥85%
Cable gland	IP-68 PG-9 PVC
Gasket	Tooling shaped seal
Power cable	H05RN-F 2X1.0mm <sup>2</sup> L=2m (low voltage) H05RN-F 3X1.0mm <sup>2</sup> L=2m (high voltage) H05RN-F 5X0.5mm <sup>2</sup> L=2m (for RGB)

Item No.	Light source	Lens	The manufacturer selected lens degree (β 1/2)	Input voltage (v)	Typical operating current (mA)	Typical consumption (w)	Typical luminance (lm)	IK rate
GKLAN-24W-09	12×2W	B33D	20	24VDC 120/240	24V=1051 120V=143 240V=79	24V=25 120V=17 240V=18	Cool white=1818 Warm white=1373	09
GKLAN-24W-09	12×2W RGB 3 in 1 Full color	B34D	30	24VDC	R=429 G=512 B=506	34	703	09

