



Landscape 10 LED Flood Light RGBW



RGBW colorful effect released

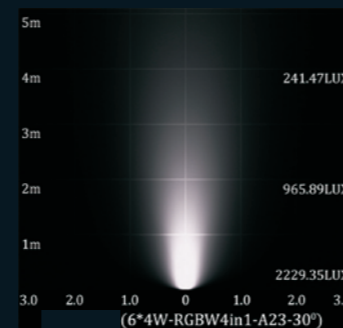

Federal LED RGBW 4in1 L0115F038KT 15°
L0130F038KT 30°

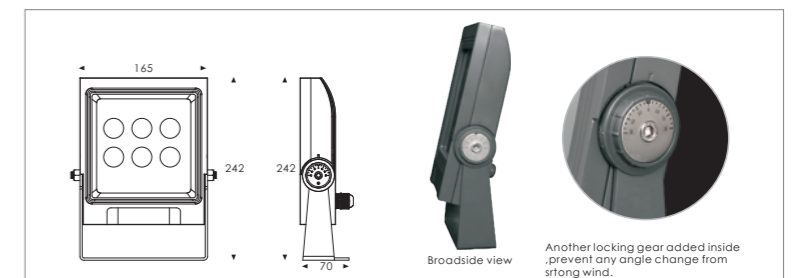

Specifications

Housing	12" Die-casting powder coated aluminum . T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
Bracket	Powder coated aluminum
Glass	Tempered glass. T=7mm
Lens	All-in-one optical lens. efficiency≥85%
Cable gland	IP-68 PG-9 PVC
Gasket	Tooling shaped seal
Power cable	RGBW 24VDC : H05RN-F 6×0.5mm ² L=2m

Item No.	Light source	Lens	The manufacturer selected lens degree (θ 1/2)	Input voltage (v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance (lm)	IK rate
GKLAN-24W-10	6X4W RGBW 4IN1	A23	30	24VDC	R=299 G=352 B=350 W=349	32	1000	09