


- Architectural Design
- Anti-glare, Low UGR < 16 / < 19
- Excellent heat dissipation to ensure long life span
- High efficiency COB chipset with high luminous flux
- 1090 Aluminum, polish anodizing, clear diffuser
- High quality Aluminum Alloy Housing
- 5 Years Warranty
- Applications include offices, shops, restaurants, hotels, schools & households

Specifications


Power	12W
Colour Range	2700 ~ 5000K
Lumen	900lm
Input Voltage	AC200 ~ 240V
Power Factor	>0.95
Beam angle	24° / 36° / 55°
CRI	>90 / 95
LED	Citizen COB
Driver	Class II SAA
IP Rating	IP20
Current	260mA / 36V
Dimmable	Triac / 1-10V / Dali
Housing Colour	Black / White / Silver

GDLUX-12W-A

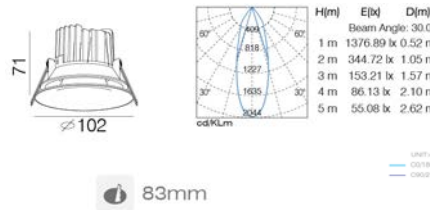


83mm

GDLUX-12W-B

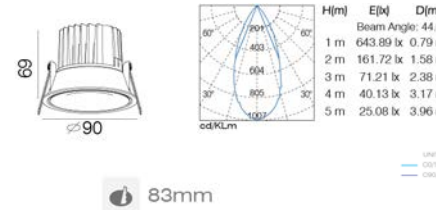

83mm

GDLUX-12W-C

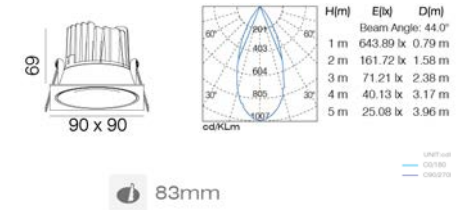

83mm

MODEL	Wattage (W)	Voltage (V)	CCT (K)	Lumen (lm)	Current (mA)	Beam Angle	Cutout (mm)	Size (mm) (LxWxD)	Surface Colour
GDLUX-12W-A	12W	200-240	2700-5000	900	260	24/36°	Ø83	Ø102*71	B/W/S
GDLUX-12W-B	12W	200-240	2700-5000	900	260	36/55°	Ø83	Ø90*69	B/W/S
GDLUX-12W-C	12W	200-240	2700-5000	900	260	36/55°	Ø83	90*90*69	B/W/S