



greenlux
cost reduction LED lighting


Noble Series LED Street/Garden Light

Available in Multiple Wattage
80% lumen maintenance at 50,000 hours

- Class II electric insulation
- High quality extruded aluminium alloy housing with Opal PMMA or PC diffuser
- High lumen output 80lm/W
- High efficiency SMD LED chipset
- Photocell sensor available
- IP65 Rated for external use
- Applications include streets, gardens, parks, and commercial sites

Specifications

Colour Range	2700 ~ 6500k
Power Consumption	20W / 40W
Product Dimensions (m)	Single 1*3 or 1*4 Double 1.9*3 or 1.9*4
Lumen	1600lm / 3200lm
Input Voltage	AC 100-240V 50-60Hz
Beam angle	160°
CRI	>80
Power Factor	>0.9
Chipset	SMD
Pole Diameter	100 * 150mm
Material	Aluminum Alloy
Diffuser	Opal PMMA or PC

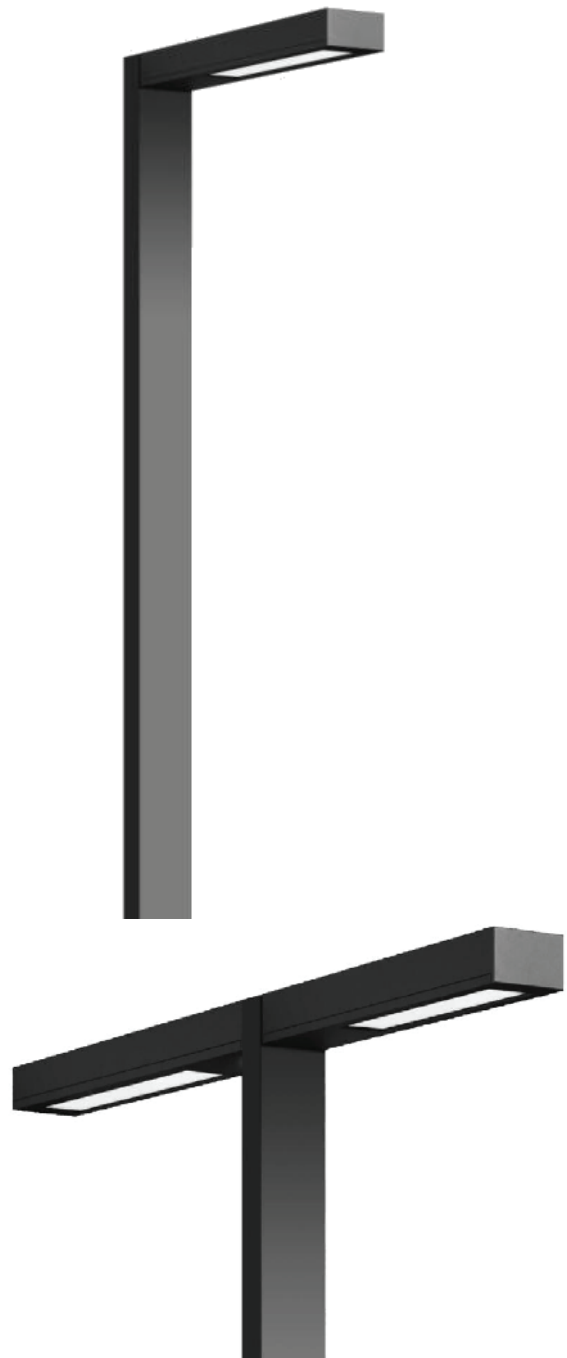

IES

LM80

RCM

SAA

IP65

TUV

CE


5 Yrs
Warranty




greenlux
cost reduction LED lighting

Noble Series LED Street/Garden Light

Single

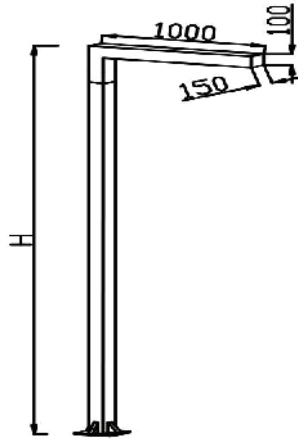

Double

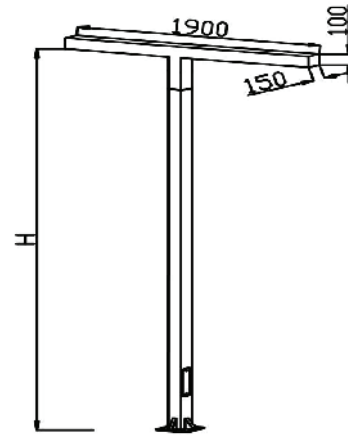

MODEL	Beam Angle (°)	Wattage (W)	Voltage (V)	LED	CCT (k)	Lumen	Pole Diameter (mm)	Size (mm) (LxH)	Surface Colour
GDMOB-20W-S	160	20W	100/240	SMD	2700-6500	1600	100*150	1*3 or 1*4	Black Grey
GDMOB-40W-D		40W				3200		1.9*3 or 1.9*4	

