



greenlux
cost reduction LED lighting

Venus 05 Series LED Street/Garden Light

Available in Multiple Wattage
80% lumen maintenance at 50,000 hours

- Class II electric insulation
- Double photomnum diffuser technology
- Supper white toughened glass
- Sealed lamp housing
- High quality die-casting aluminium housing with aluminium sheet rotating cover
- High lumen output 80lm/W
- High efficiency Cree LED chipset
- Photocell sensor available
- IP65 Rated for external use
- Applications include streets, gardens, parks, and commercial sites

Specifications

Colour Range	3000 ~ 6500k
Power Consumption	Single 20W Double 20*2W
Product Dimensions (mm)	Single Ø310*300*2000 Double Ø310*600*2300
Lumen	1600 / 3200lm
Input Voltage	AC 100-240V
Beam angle	160°
CRI	>75
Power Factor	>0.95
Chipset	Cree
Driver	Mean Well
Housing Color	Black / Grey



IES

LM80

RCM

SAA

IP65

TUV

CE

5 Yrs
Warranty



greenlux
cost reduction LED lighting




Venus 05 Series LED Street/Garden Light

Product Dimensions

Pole Data

Pole	Carbon Steel
Material	Hot Galvanizing Surface Treatment with Powder Coating
Thickness (mm)	2.5 / 3
Bottom Flange Thickness	10mm
Assembly Size	Ø76mm
Pole Height (m)	2.6 / 2.75 / 4

Photometrics

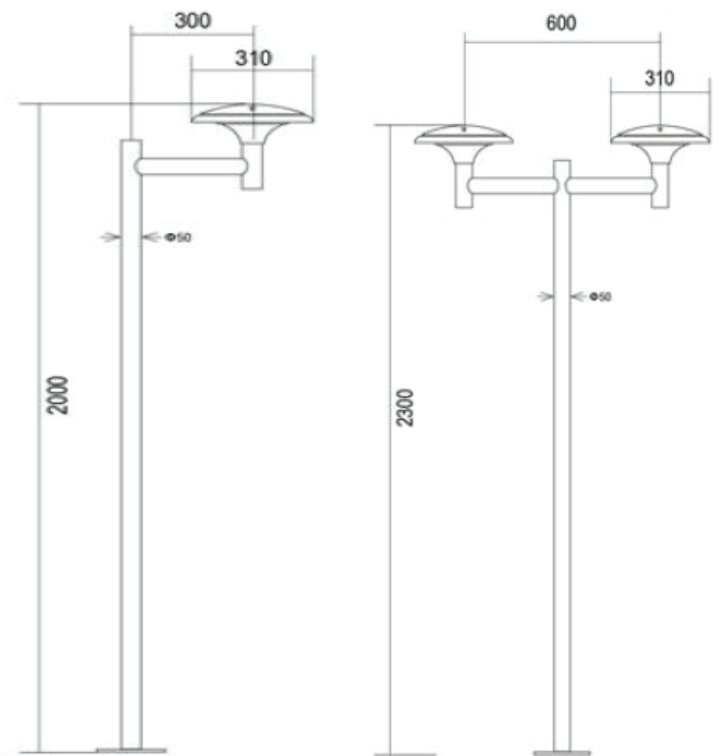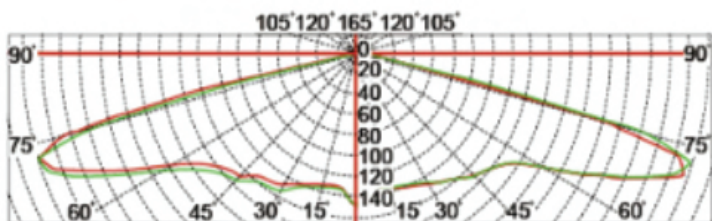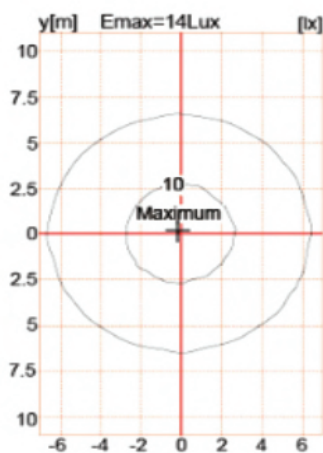




greenlux
cost reduction LED lighting

Venus 05 Series LED Street/Garden Light

Pole Size Diagrams

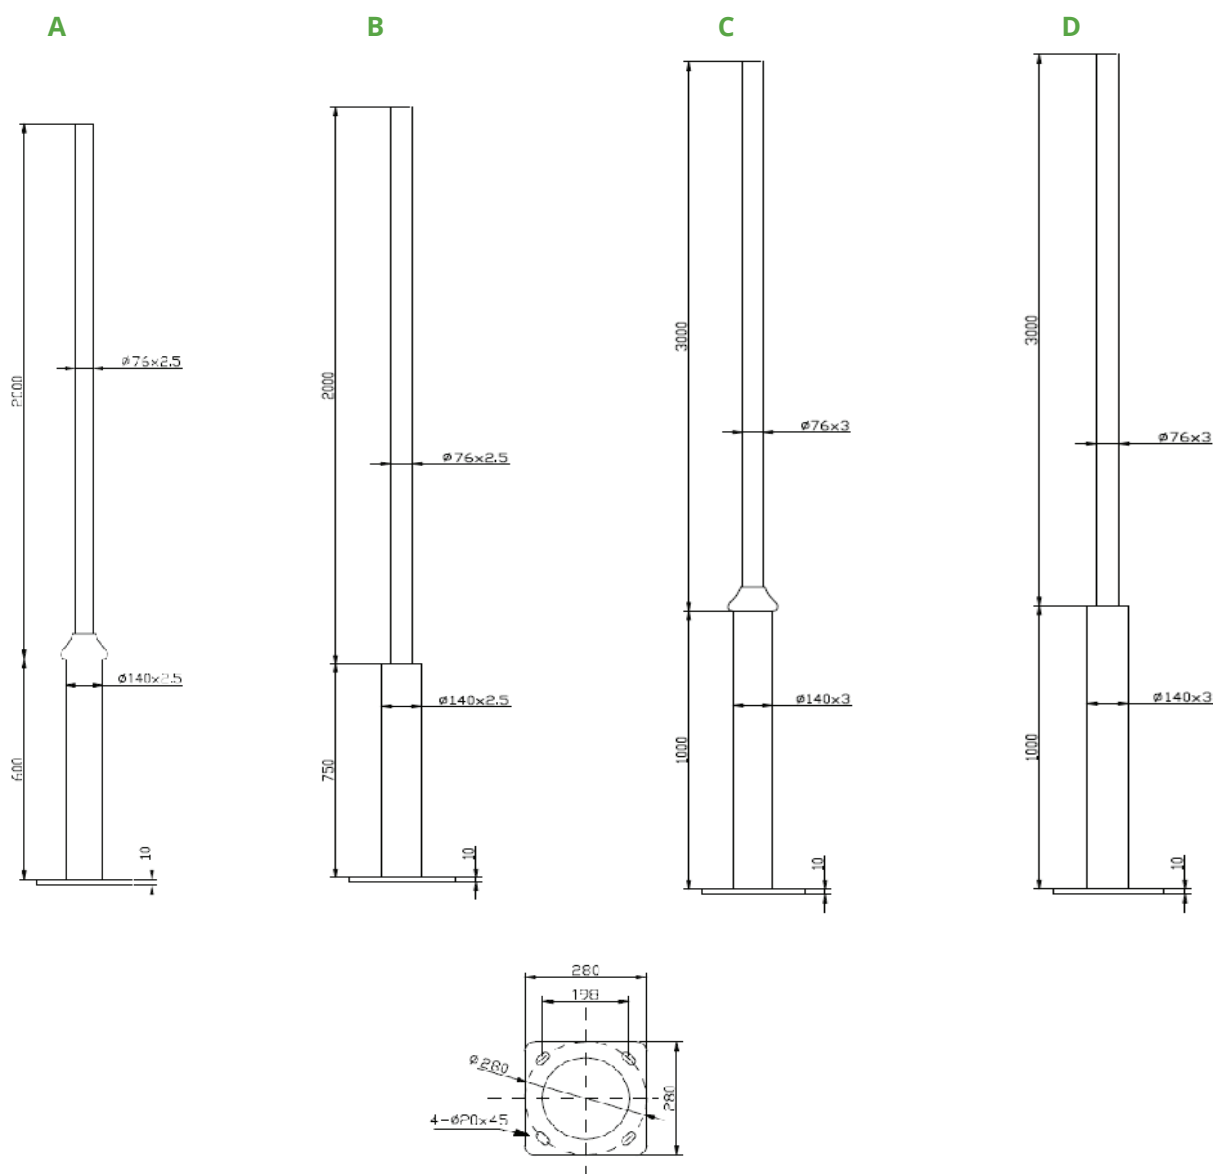

MODEL	Beam Angle (°)	Wattage (W)	Voltage (V)	LED	CCT (k)	Lumen	Size (mm) (LxWxD)	Surface Colour
GYVEN-S-05	160	20W	100/240	Cree	3000-6500	1600	Ø310*300*2000	Black Grey
GYVEN-D-05		20*2W				3200	Ø310*600*2300	