



Chain GLS5470 LED Linear Extrusion Light (CUSTOMIZED LENGTH)




Features

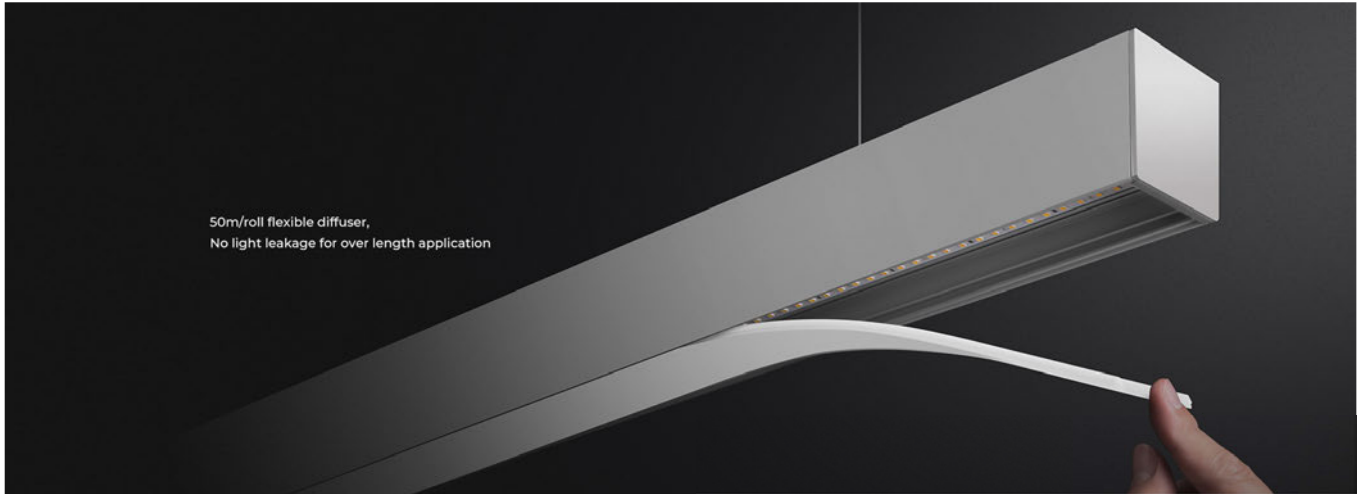

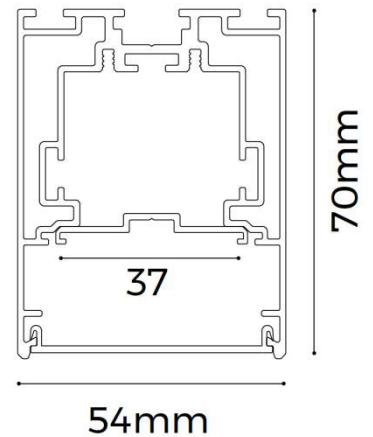

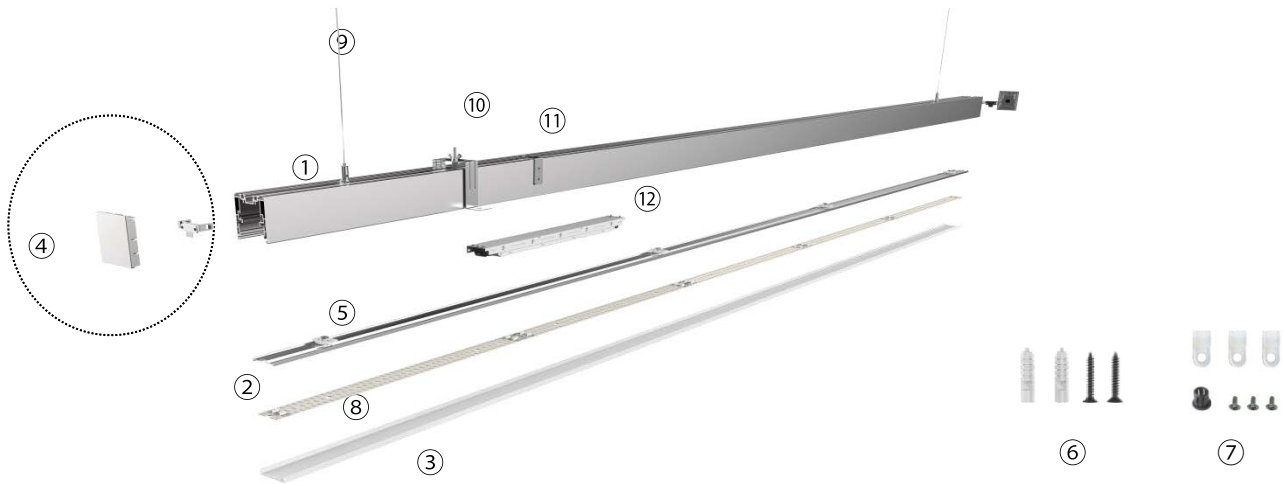

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogeneous & soft lighting
- Free to collocation ordinary PC diffuser, flexible diffuser, anti-glare flexible diffuser, black diffuser, aluminum diffuser
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted
- Housing Colour: White / Black / Silver



Chain GLS5470 LED Linear Extrusion Light (CUSTOMIZED LENGTH)















Standard Configuration

Picture	Item	Parameter
	①Profile /②Carrier:	Profile weight : 4.02kg/2.5m Size : L2500*W54*H70mm Material : AL6063-T5 Surface processing : Anodizing
	③Cover	Type: Frosted diffuser Material : PC Light transmittance : 75% Size : L2500*W47.5*H10mm PC Feature : The diffuser will extend (shrink) 0.8mm/m when the temperature raises (drops) 10°.
	④End cap	Size : L54*W70*H10.5mm
	⑤Quick locker	Size : L32*W22*H6.8mm
	⑥Install screw	
	⑦Cable clip	Size : M3.5*30mm




Chain GLS5470 LED Linear Extrusion Light (CUSTOMIZED LENGTH)

Optional Accessories








Picture	Item	Parameter
	⑤Flexible strip D8280-24V-34mm	Material : FPC,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI>80/>95 ;Voltage :24V ;Power : 25W/m ;Lumen :3250Lm/m ; Width : 34mm ; Minimum cutting unit : 28LEDs/50mm ;
	⑤Flexible strip D8560SWW-24V-34mm	Material : FPC, CCT : 2700-6000K ; CRI>80/>95 ; Voltage : 24V ; Power : 25W/m ; Lumen : 2740Lm/m ; Width : 34mm ; Minimum cutting unit : 28LEDs/50mm ; tunable white
	⑤Rigid modular DY8280-24V-36mm	Material : FR4,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI>80/>95 ;Voltage :24V ;Power : 25W/m ;Lumen :3250Lm/m ; Width : 36mm ; Minimum cutting unit : 28LEDs/50mm ;
	⑤Rigid modular DY8560SWW-24V-36mm	Material : FR4, CCT : 2700-6000K ; CRI>80/>95 ; Voltage : 24V ; Power : 25W/m ; Lumen : 2740Lm/m ; Width : 36mm ; Minimum cutting unit : 28LEDs/50mm ; tunable white
	Pendant cable with junction box	Steel cable D1.5*2000/4000mm Junction box L80*W80*H30mm
	Pendant cable without junction box	Steel cable D1.5*2000/4000mm
	Recessed buckle	Size : L110*W25*H82mm
	Wall-mounted buckle	Size : L50*W34*H18mm
	Surface mounted buckle	Size : L90.5*W54*H5.9mm
	Reflective paper	Size : L15000*W19*H0.188mm
	Power supply	model : GCBSD-V24-065S Size : 346*30*23.5mm
	Whole lamp splice	Size : L80*W51*H6mm

Chain GLS5470 LED Linear Extrusion Light (CUSTOMIZED LENGTH)

Cover type

Picture	Item	Parameter
	②cover	Type: Diffuse flexible mask Material: PC + silica gel Transparency: 70 % Size: L5000*W47.5*H10mm
	②cover	Type: Aluminum mask Material: Aluminum alloy Size: L2500*W47.5*H10mm
	②cover	Type: Night mask Material: PC Transparency: 15 % Size: L2500*W47.5*H10mm


Corner fittings

EX-23	EX-E6	EX-E7	EX-E8
			
EX-E9	EX-E10	EX-E11	EX-E12
			

Chain GLS5470 LED Linear Extrusion Light (CUSTOMIZED LENGTH)

Corners

L-type corner (L90- LS5470(F))



Al6063-T5
L100*W100*H70mm

L-type inner corner(L90N- LS5470(F))




Al6063-T5
L100*W100*H54mm

L-type exterior corner(L90W- LS5470(F))



Al6063-T5
L150*W150*H54mm

T-type corner(T90- LS5470(F))



Al6063-T5
L150*W100*H70mm

X-type corner(X90- LS5470(F))



Al6063-T5
L150*W150*H70mm

180° extender




Al6063-T5&PC
6W
L80*W10*H2mm

* The corners can be provided with or without light source.

Optical Parameter


D8280-24V-34mm light source, frosted diffuser

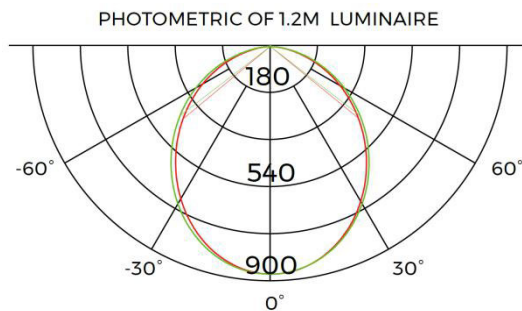

1m	312.8,877.3lx	243.14cm
2m	78.20,219.3lx	486.29cm
3m	34.75,97.48lx	729.43cm
5m	12.51,35.09lx	1215.71cm
7m	6.384,17.90lx	1966.01cm
Height	Eavg,Emax	Angle:101.12deg Diameter

Chain GLS5470 LED Linear Extrusion Light (CUSTOMIZED LENGTH)


Model	Lumen	Dimension	NW	CCT	Voltage	Dimmable	CRI
GCCHA-GLS5470-62.5W-2500	8125lm (25W/m 3250lm/m)	L2500*W54*H70mm	4.62kg	3000/4000/5000K	24V DC	0-10V / DALI	>80 / >95

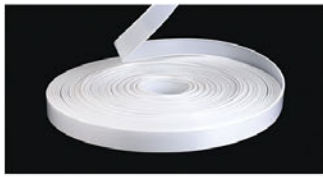


50m/roll flexible diffuser



Freely cutting on demands, avoid wasting

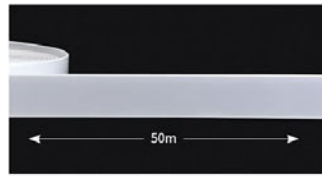

Without connections and light leakage for over length application

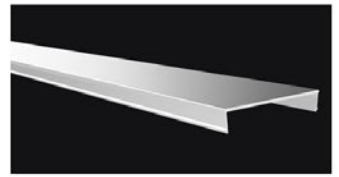

Aluminum blind cover for various applications

