


## Bright Circle A Series



- Ceiling Mounted, Suspended, Suspended Rod.
- White / Black Housing Colour Options
- Application: offices, hotels, households, public area, hallway etc.
- Warranty: Residential 3 Yrs / Commercial 5 Yrs

## Bright Circle A Series

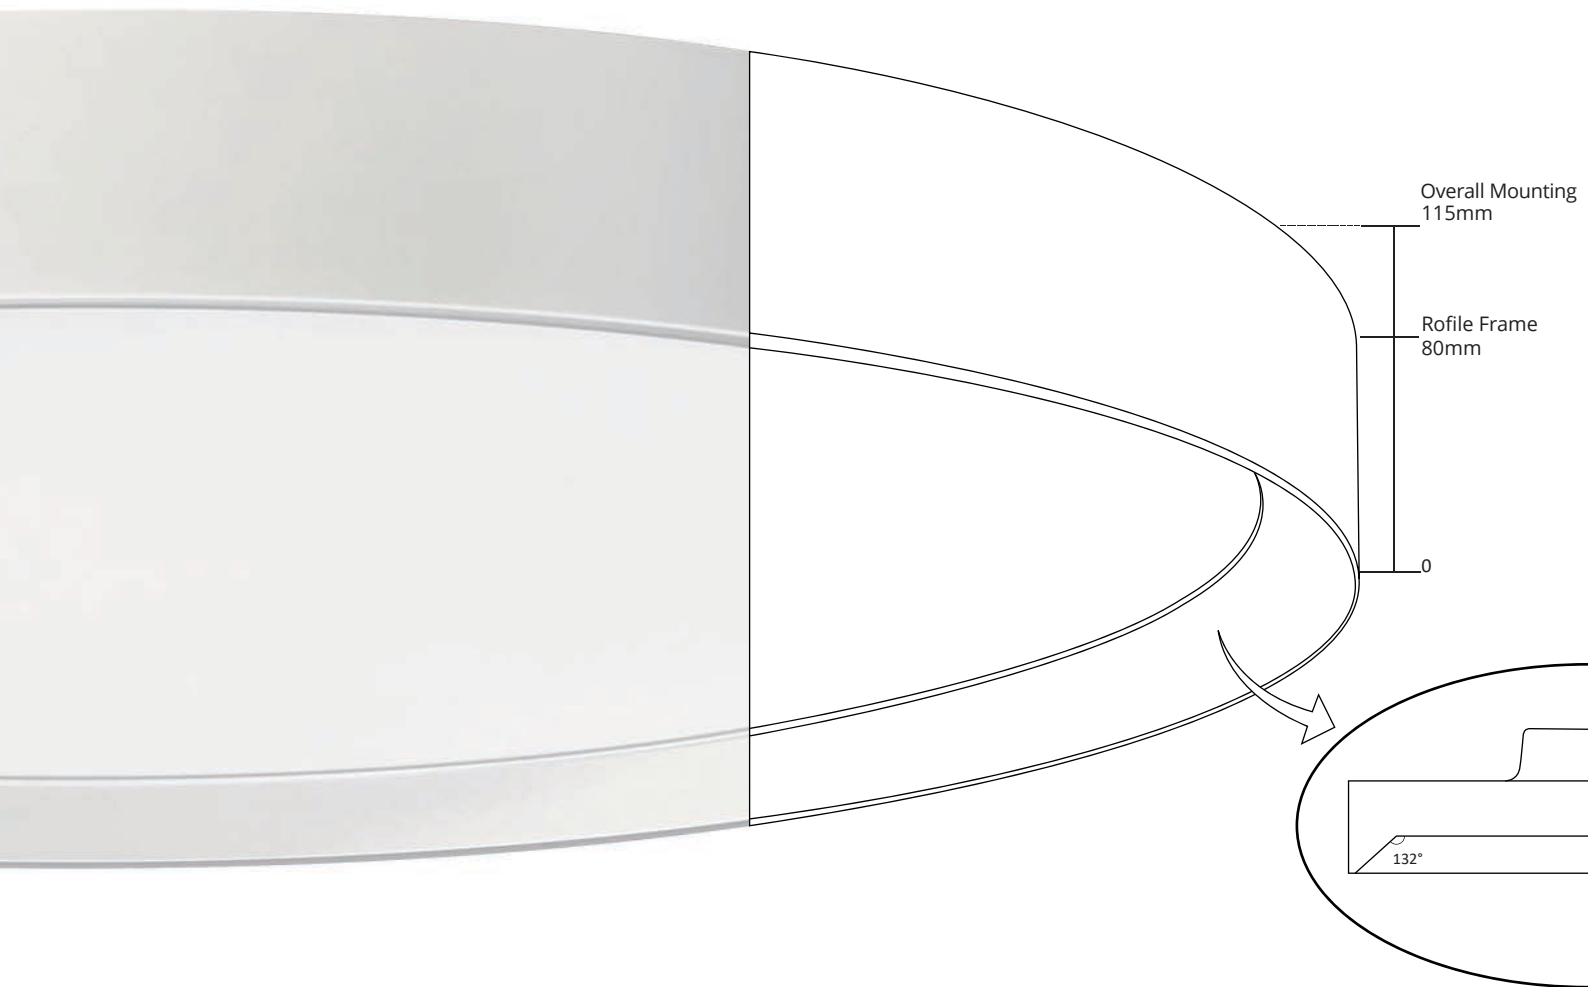

### SPECIAL FEATURES

- Rolled profile, seamlessly welded round luminaire. Aluminium housing.
- Easy installation with lightweight deep-drawn steel housing.



Opal cover

Microprismatic Diffuser

## Bright Circle A Series

- Wide range of options available for different projects.
- Opal cover / Microprismatic variant glare-free office lighting.
- Direct lighting / indirect lighting.
- Sizes: 300mm / 435mm / 585mm / 735mm / 875mm / 1150mm.

	ø 300mm	ø 450mm	ø 600mm	ø 750mm	ø 900mm	ø 1200mm
<b>MOUNTING</b>						
Wall	•	•	•			
Ceiling	•	•	•	•	•	•
Suspended Cable		•	•	•	•	•
Suspended Rod		•	•			



# Bright Circle A Series

Surface / Ceiling Mounted

## Specification

### GENERAL

Ceiling Mounted

IP20

### LED

Up to 120lm/w

2700 - 6500K

CRI >80 / 90

SDCM ≤3

### ESTIMATED LED LIFETIME

L90 / 50,000h

### OPTICAL

Direct / Indirect Illumination

PS Cover Opal

Microprismatic (Low UGR)

Beam Angle: 110°

### ELECTRICAL

Non Dimable / DALI, 1-10V, TRAIC

PF >0.9

### PHYSICAL

Aluminium

Powder-coated


### HOUSING COLOUR

Black

White

### COLOUR TEMPERATURE

2700 - 6500K Options



Microprismatic (Low UGR)





Direct / Indirect Light Distribution

# Bright Circle A Series

## Surface / Ceiling Mounted

### GHBRI-300-CS-A



**DIRECT**

100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
20W	2700-6500K	φ300*115
30W	2700-6500K	φ300*115

**DIRECT/INDIRECT**






100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
20W	2700-6500K	φ300*115
30W	2700-6500K	φ300*115

### GHBRI-735-CS-A



**DIRECT**

100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
50W	2700-6500K	φ735*115
70W	2700-6500K	φ735*115

**DIRECT/INDIRECT**






100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
50W	2700-6500K	φ735*115
70W	2700-6500K	φ735*115

### GHBRI-435-CS-A



**DIRECT**

100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115
40W	2700-6500K	φ435*115

**DIRECT/INDIRECT**






100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115
40W	2700-6500K	φ435*115

### GHBRI-875-CS-A



**DIRECT**

100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
70W	2700-6500K	φ875*115
90W	2700-6500K	φ875*115

**DIRECT/INDIRECT**






100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
70W	2700-6500K	φ875*115
90W	2700-6500K	φ875*115

### GHBRI-585-CS-A



**DIRECT**

100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115
50W	2700-6500K	φ585*115

**DIRECT/INDIRECT**






100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115
50W	2700-6500K	φ585*115

### GHBRI-1150-CS-A



**DIRECT**

100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
80W	2700-6500K	φ1150*115
100W	2700-6500K	φ1150*115

**DIRECT/INDIRECT**

100-277v / 200-240v IP20 SAA RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
80W	2700-6500K	φ1150*115
100W	2700-6500K	φ1150*115



# Bright Circle A Series

Suspended

## Specification

### GENERAL

Suspended

IP20

### LED

Up to 120lm/w

2700 - 6500K

CRI >80 / 90

SDCM ≤3

### ESTIMATED LED LIFETIME

L90 / 50,000h

### OPTICAL

Direct / Indirect Illumination

PS Cover Opal

Microprismatic (Low UGR)

Beam Angle: 110°

### ELECTRICAL

Non Dimable / DALI, 1-10V, TRAIC

PF >0.9

### PHYSICAL

Aluminium

Powder-coated


### HOUSING COLOUR

Black

White

### COLOUR TEMPERATURE

2700 - 6500K Options



Microprismatic (Low UGR)



Direct / Indirect Light Distribution

# Bright Circle A Series

## Suspended

### GHBRI-435-CH-A

DIRECT





SYSTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115mm
40W	2700-6500K	φ435*115mm

DIRECT/INDIRECT



SYSTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115mm
40W	2700-6500K	φ435*115mm



φ435mm

### GHBRI-875-CH-A

DIRECT





SYSTEM POWER	CCT	LUMINOUS EFFICACY
70W	2700-6500K	φ875*115mm
90W	2700-6500K	φ875*115mm

DIRECT/INDIRECT



SYSTEM POWER	CCT	LUMINOUS EFFICACY
70W	2700-6500K	φ875*115mm
90W	2700-6500K	φ875*115mm



φ875mm

### GHBRI-585-CH-A

DIRECT





SYSTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115mm
50W	2700-6500K	φ585*115mm

DIRECT/INDIRECT



SYSTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115mm
50W	2700-6500K	φ585*115mm



φ585mm

### GHBRI-1150-CH-A

DIRECT





SYSTEM POWER	CCT	LUMINOUS EFFICACY
80W	2700-6500K	φ1195*115mm
100W	2700-6500K	φ1195*115mm

DIRECT/INDIRECT



SYSTEM POWER	CCT	LUMINOUS EFFICACY
80W	2700-6500K	φ1150*115mm
100W	2700-6500K	φ1150*115mm



φ1150mm

### GHBRI-735-CH-A

DIRECT





SYSTEM POWER	CCT	LUMINOUS EFFICACY
50W	2700-6500K	φ735*115mm
70W	2700-6500K	φ735*115mm

DIRECT/INDIRECT



SYSTEM POWER	CCT	LUMINOUS EFFICACY
50W	2700-6500K	φ735*115mm
70W	2700-6500K	φ735*115mm



φ735mm

# Bright Circle A Series

Suspended Rod



## Specification

### GENERAL

Suspended Rod

IP20

### LED

Up to 120lm/w

2700 - 6500K

CRI >80 / 90

SDCM ≤3

### ESTIMATED LED LIFETIME

L90 / 50,000h

### OPTICAL

Direct / Indirect Illumination

PS Cover Opal

Microprismatic (Low UGR)

Beam Angle: 110°

### ELECTRICAL

Non Dimable / DALI, 1-10V, TRAIC

PF >0.9

### PHYSICAL

Aluminium

Powder-coated


### HOUSING COLOUR

Black

White

### COLOUR TEMPERATURE

2700 - 6500K Options



Microprismatic (Low UGR)




Direct / Indirect Light Distribution

# Bright Circle A Series

## Suspended Rod

### GHBRI-435-CR-A

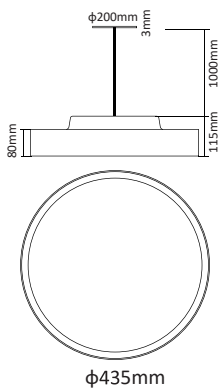

#### DIRECT




SYSYTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115mm
40W	2700-6500K	φ435*115mm

#### DIRECT/INDIRECT



SYSYTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115mm
40W	2700-6500K	φ435*115mm

### GHBRI-585-CR-A

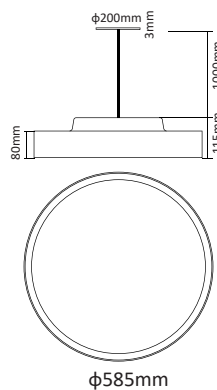

#### DIRECT



SYSYTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115mm
50W	2700-6500K	φ585*115mm

#### DIRECT/INDIRECT




SYSYTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115mm
50W	2700-6500K	φ585*115mm


# Bright Circle A Series

## Product Range


### SIZE

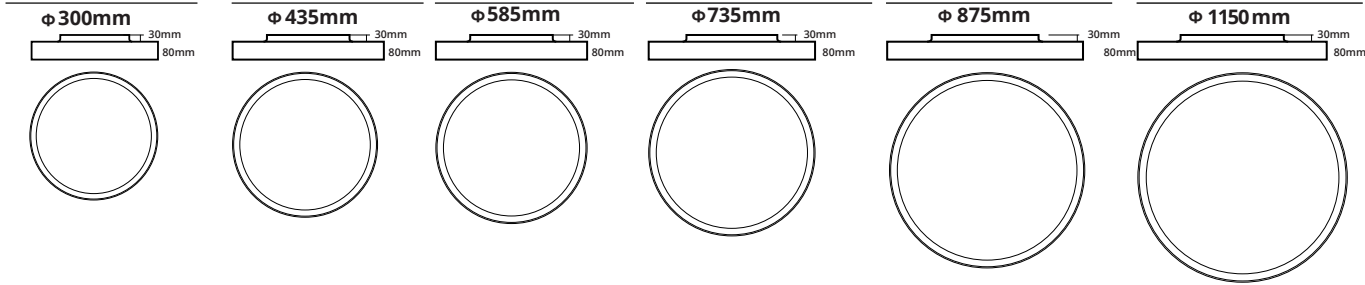

### MOUNTING

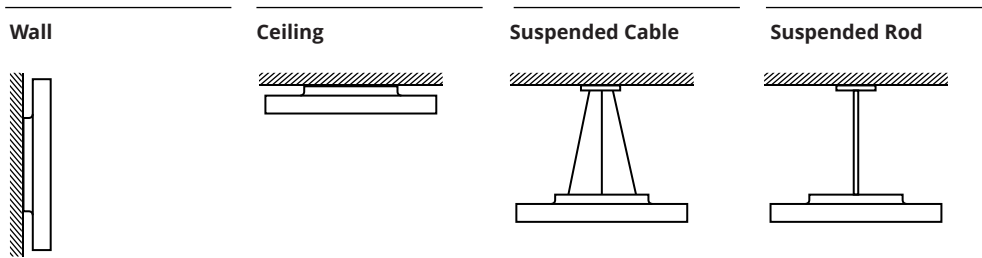

### TYPE

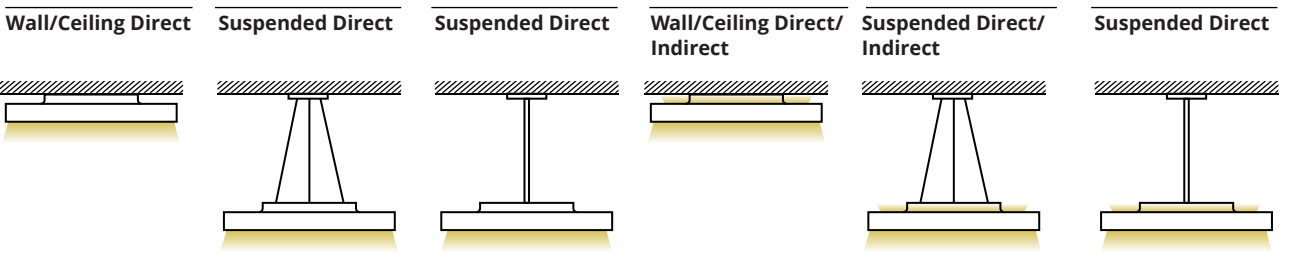

## Bright Circle A Series

