

Bright Circle A Series

Suspended Rod



Specification

GENERAL

Suspended Rod

IP20

LED

Up to 120lm/w

2700 - 6500K

CRI >80 / 90

SDCM ≤3

ESTIMATED LED LIFETIME

L90 / 50,000h

OPTICAL

Direct / Indirect Illumination

PS Cover Opal

Microprismatic (Low UGR)

Beam Angle: 110°

ELECTRICAL

Non Dimable / DALI, 1-10V, TRAC

PF >0.9

PHYSICAL

Aluminium

Powder-coated


HOUSING COLOUR

Black

White

COLOUR TEMPERATURE

2700 - 6500K Options




Microprismatic (Low UGR)



Direct / Indirect Light Distribution

Bright Circle A Series

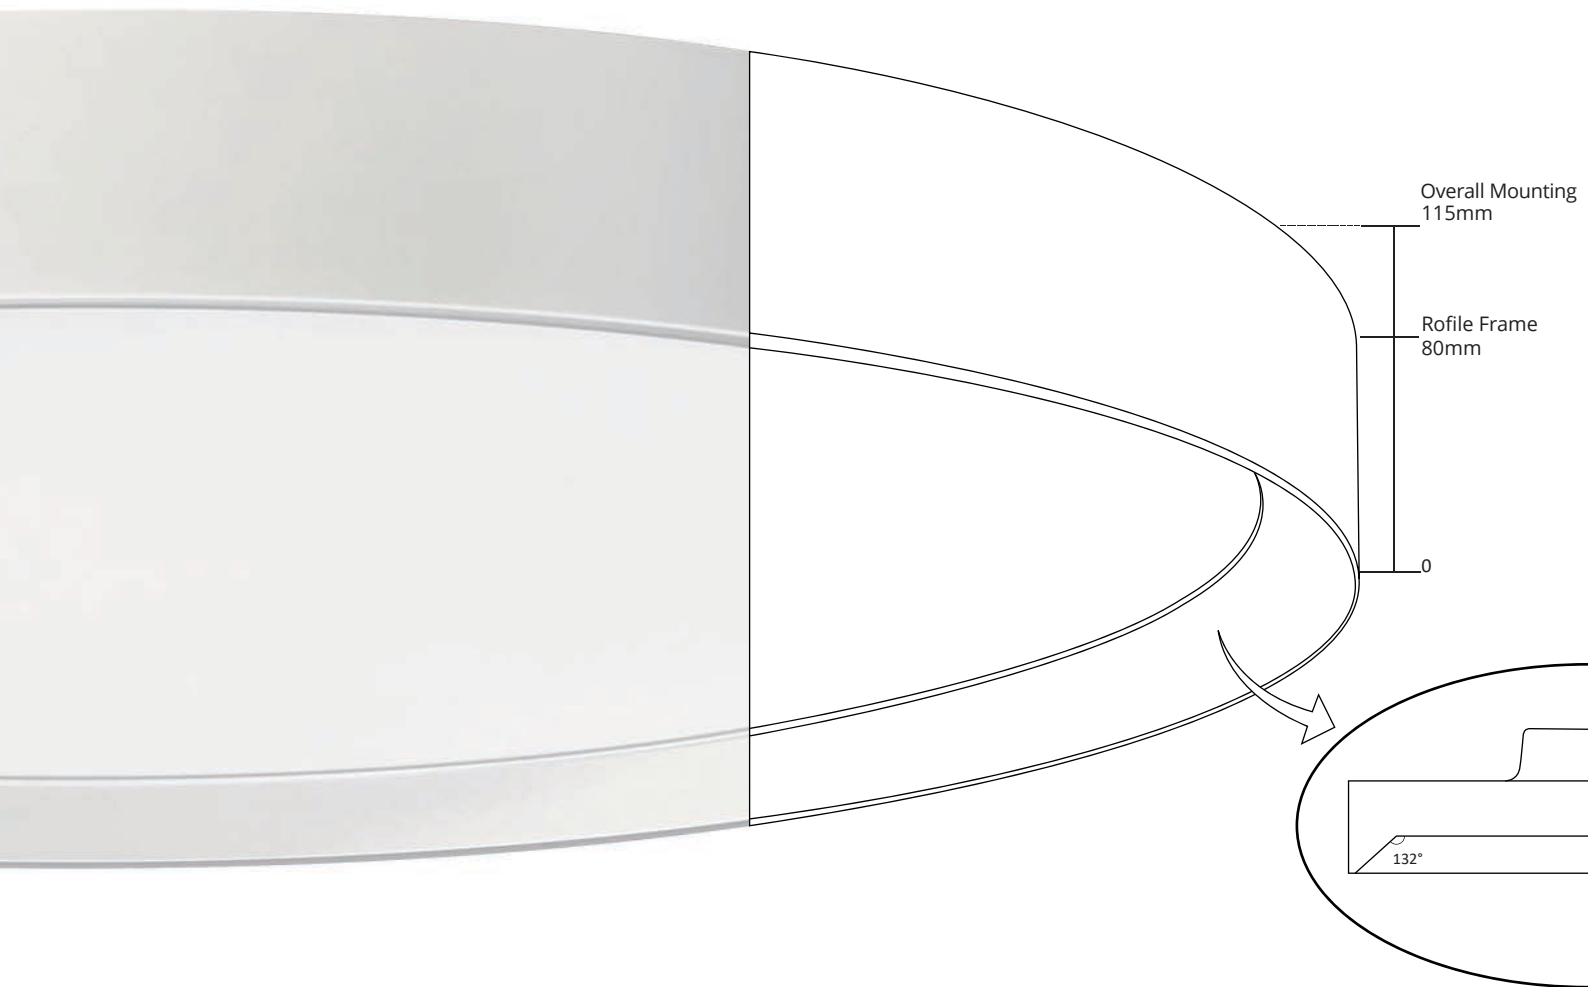


SPECIAL FEATURES

- Rolled profile, seamlessly welded round luminaire. Aluminium housing.
- Easy installation with lightweight deep-drawn steel housing.

Bright Circle A Series

Suspended Rod

GHBRI-435-CR-A

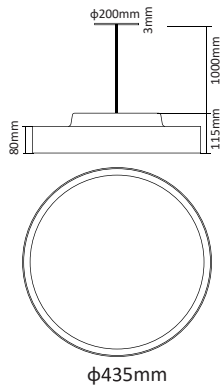

DIRECT




SYSYTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115mm
40W	2700-6500K	φ435*115mm

DIRECT/INDIRECT



SYSYTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115mm
40W	2700-6500K	φ435*115mm

GHBRI-585-CR-A

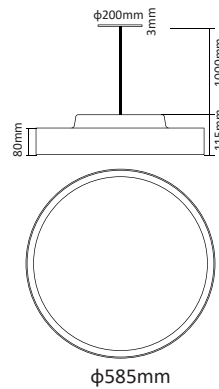

DIRECT



SYSYTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115mm
50W	2700-6500K	φ585*115mm

DIRECT/INDIRECT




SYSYTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115mm
50W	2700-6500K	φ585*115mm


Bright Circle A Series

Product Range


SIZE

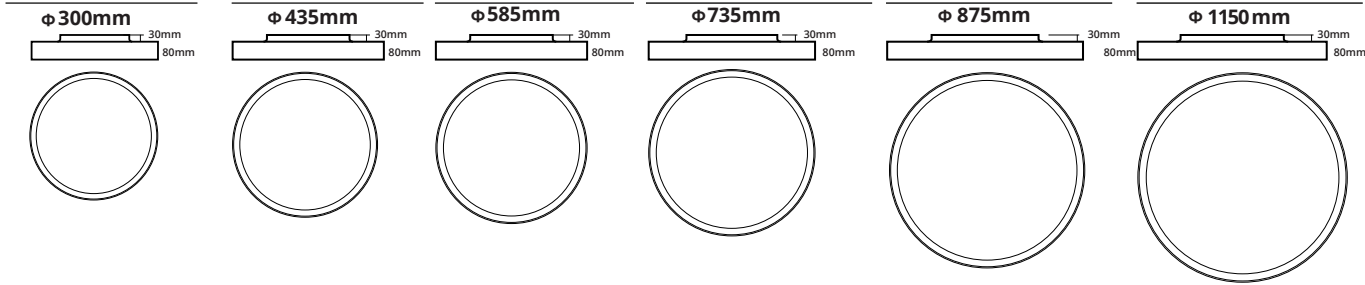

MOUNTING

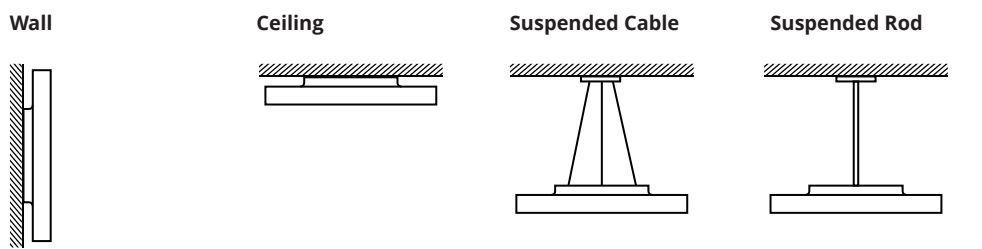

TYPE

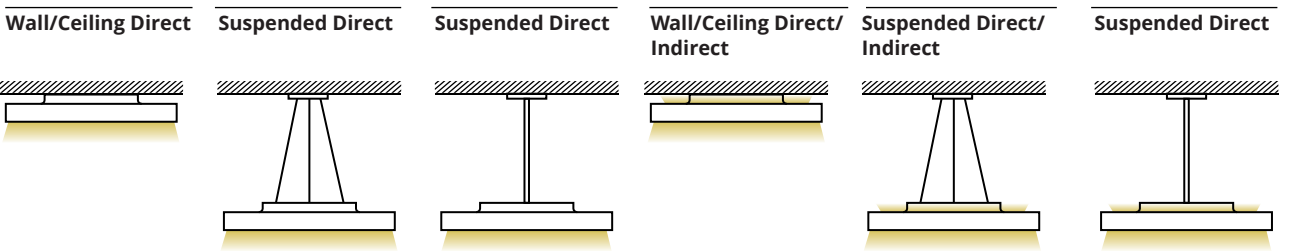

Bright Circle A Series

