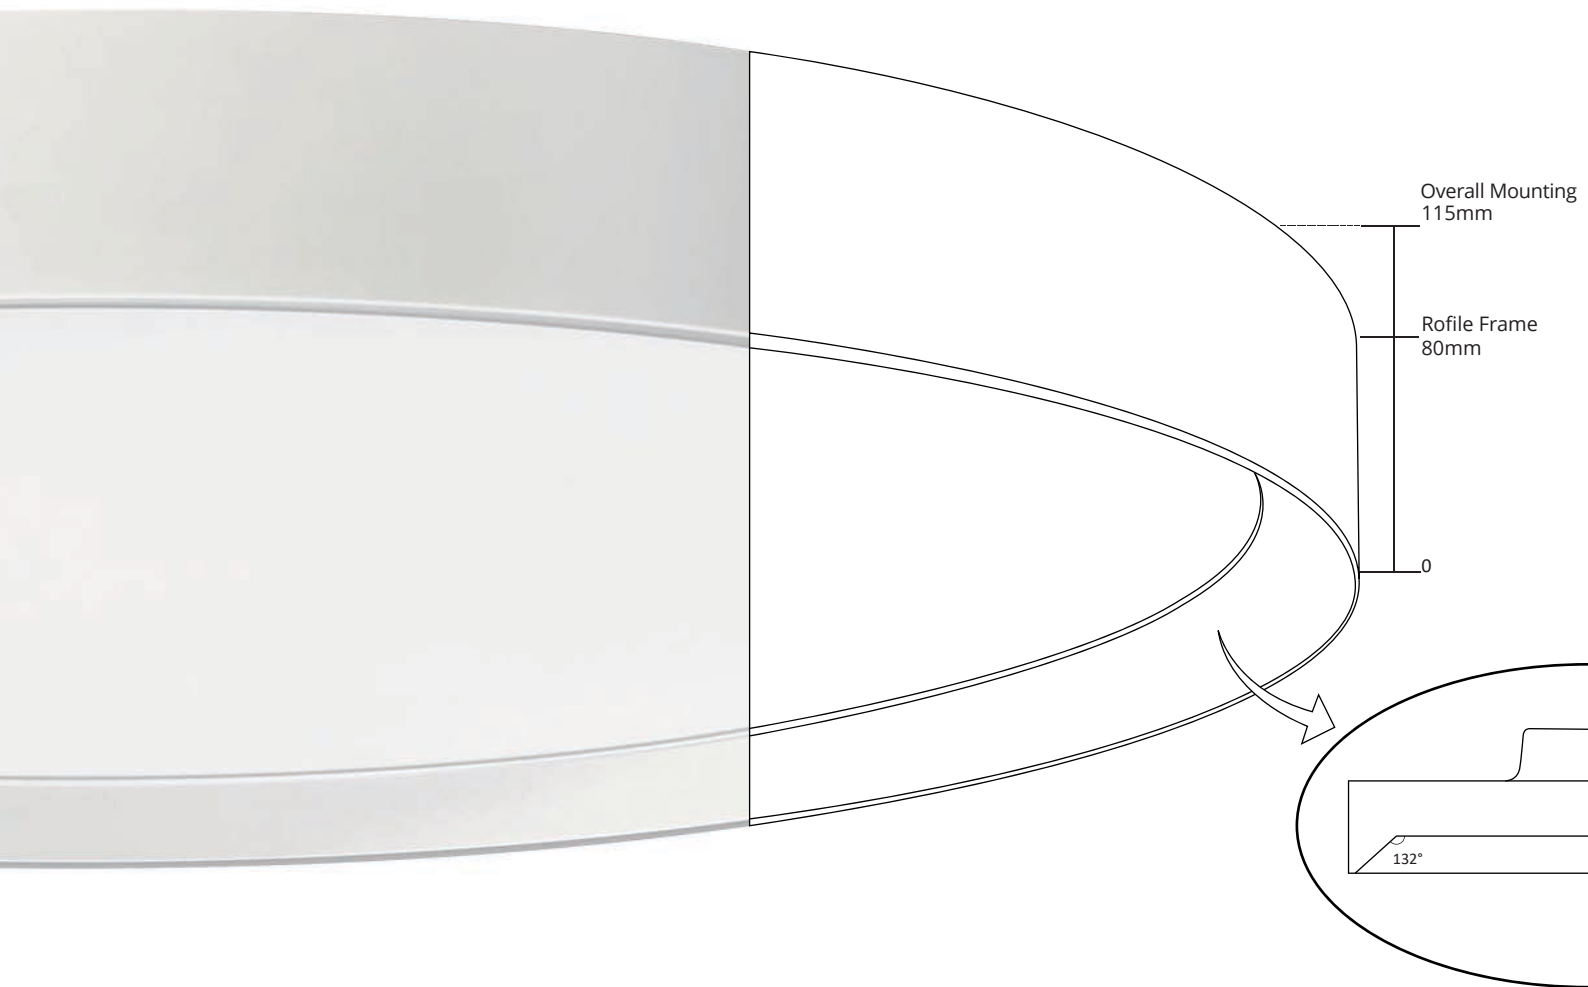


Bright Circle A Series



SPECIAL FEATURES

- Rolled profile, seamlessly welded round luminaire. Aluminium housing.
- Easy installation with lightweight deep-drawn steel housing.



Bright Circle A Series

Surface / Ceiling Mounted

Specification

GENERAL

Ceiling Mounted

IP20

LED

Up to 120lm/w

2700 - 6500K

CRI >80 / 90

SDCM ≤3

ESTIMATED LED LIFETIME

L90 / 50,000h

OPTICAL

Direct / Indirect Illumination

PS Cover Opal

Microprismatic (Low UGR)

Beam Angle: 110°

ELECTRICAL

Non Dimable / DALI, 1-10V, TRAIC

PF >0.9

PHYSICAL

Aluminium

Powder-coated

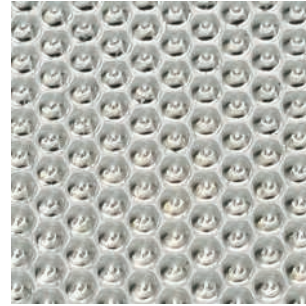
HOUSING COLOUR

Black

White

COLOUR TEMPERATURE

2700 - 6500K Options



Microprismatic (Low UGR)





Direct / Indirect Light Distribution

Bright Circle A Series

Surface / Ceiling Mounted

GHBRI-300-CS-A

DIRECT

100-277v / 200-240v



IP20

SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
20W	2700-6500K	φ300*115
30W	2700-6500K	φ300*115

DIRECT/INDIRECT

100-277v / 200-240v

IP20



SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
20W	2700-6500K	φ300*115
30W	2700-6500K	φ300*115

GHBRI-735-CS-A

DIRECT

100-277v / 200-240v



IP20

SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
50W	2700-6500K	φ735*115
70W	2700-6500K	φ735*115

DIRECT/INDIRECT

100-277v / 200-240v

IP20



SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
50W	2700-6500K	φ735*115
70W	2700-6500K	φ735*115

GHBRI-435-CS-A

DIRECT

100-277v / 200-240v



IP20

SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115
40W	2700-6500K	φ435*115

DIRECT/INDIRECT

100-277v / 200-240v

IP20



SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
30W	2700-6500K	φ435*115
40W	2700-6500K	φ435*115

GHBRI-875-CS-A

DIRECT

100-277v / 200-240v



IP20

SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
70W	2700-6500K	φ875*115
90W	2700-6500K	φ875*115

DIRECT/INDIRECT

100-277v / 200-240v

IP20



SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
70W	2700-6500K	φ875*115
90W	2700-6500K	φ875*115

GHBRI-585-CS-A

DIRECT

100-277v / 200-240v



IP20

SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115
50W	2700-6500K	φ585*115

DIRECT/INDIRECT

100-277v / 200-240v

IP20



SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
40W	2700-6500K	φ585*115
50W	2700-6500K	φ585*115

GHBRI-1150-CS-A

DIRECT

100-277v / 200-240v



IP20

SAA

RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
80W	2700-6500K	φ1150*115
100W	2700-6500K	φ1150*115

DIRECT/INDIRECT

100-277v / 200-240v

IP20

SAA

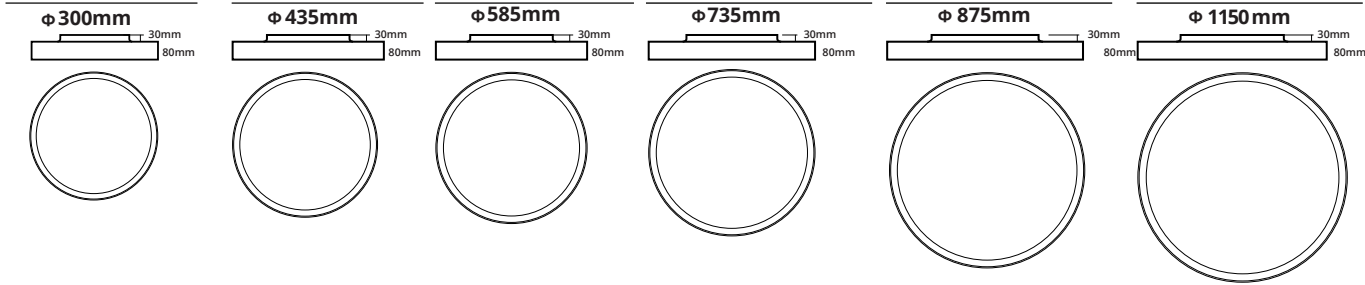
RoHs

SYSYTEM POWER	CCT	LUMINOUS EFFICACY
80W	2700-6500K	φ1150*115
100W	2700-6500K	φ1150*115

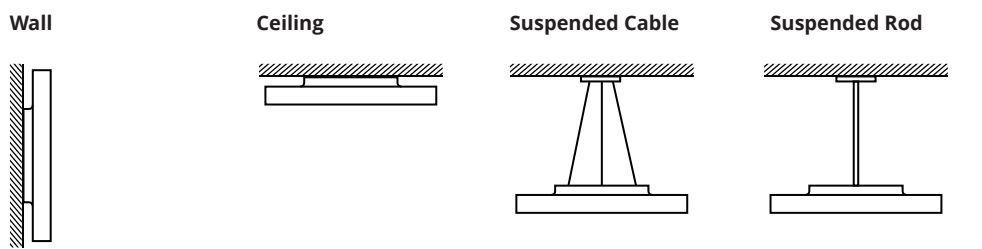
Bright Circle A Series

Product Range

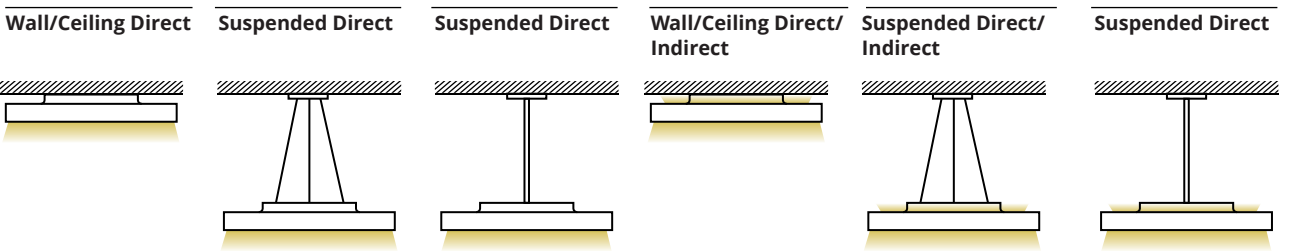
SIZE



MOUNTING



TYPE



Bright Circle A Series

