





greenlux
cost reduction LED lighting

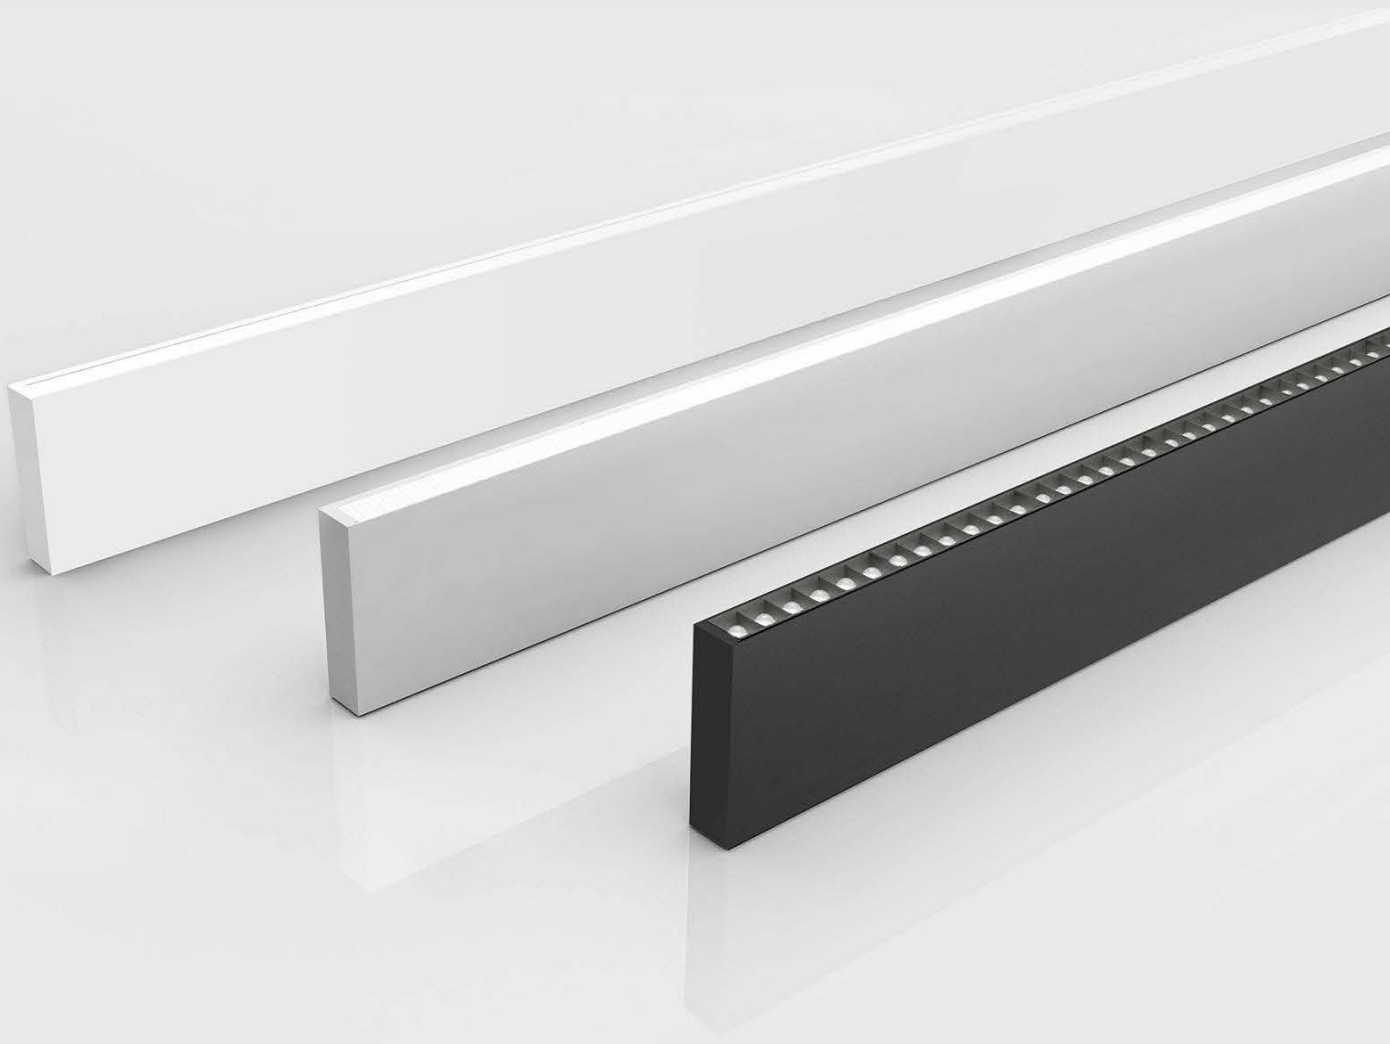

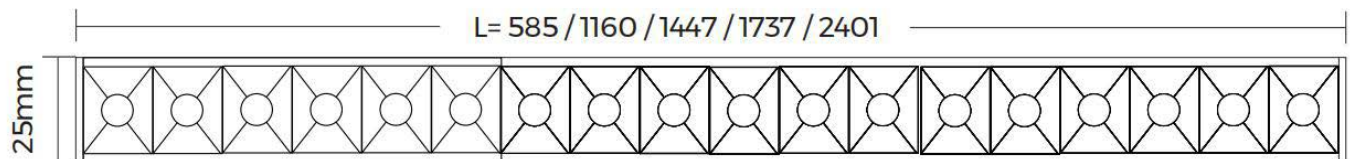




Chain GLH25 Suspended



- Up / Down Lighting
- Suspended
- 25mm Slim Lighting Surface
- High Efficiency 105lm/W, Lumen Output Up To 4200lm/m for Up / Down
- Multiple Light Distribution Options:
Diffuser / Microprism / Grating 30° & 60°
- Multiple Standard Corner Options:
L Type / X Type / T Type
- Electric Wire & Suspension Wire 2-in-1 Invisible Design

Chain GLH25 Suspended


Optical & Electronic Data

Model	Size	 Diffuser	 Microprism	 Grating 30°	 Grating 60°	 Blind cover
GCCHA-GLH25-24W	600mm	Up: 12W / 950LM Down: 12W / 1250LM	Up: 12W / 950LM Down: 12W / 1250LM	Up: 12W / 950LM Down: 12W / 850LM	Up: 12W / 950LM Down: 12W / 700LM	/
GCCHA-GLH25-48W	1200mm	Up: 24W / 1900LM Down: 24W / 2500LM	Up: 24W / 1900LM Down: 24W / 2500LM	Up: 24W / 1900LM Down: 24W / 1700LM	Up: 24W / 1900LM Down: 24W / 1400LM	/
GCCHA-GLH25-60W	1500mm	Up: 30W / 2400LM Down: 30W / 3150LM	Up: 30W / 2400LM Down: 30W / 3150LM	Up: 30W / 2400LM Down: 30W / 2100LM	Up: 30W / 2400LM Down: 30W / 1800LM	/
GCCHA-GLH25-72W	1800mm	Up: 36W / 2900LM Down: 36W / 3750LM	Up: 36W / 2900LM Down: 36W / 3750LM	Up: 36W / 2900LM Down: 36W / 2500LM	Up: 36W / 2900LM Down: 36W / 2300LM	/
GCCHA-GLH25-96W	2400mm	Up: 48W / 3850LM Down: 48W / 5000LM	Up: 48W / 3850LM Down: 48W / 5000LM	Up: 48W / 3850LM Down: 48W / 3500LM	Up: 48W / 3850LM Down: 48W / 3100LM	/
GCCHA-GLH25-L	L* (277*277mm)	11W / 1155LM	11W / 1155LM	/	/	Available
GCCHA-GLH25-T	T* (529*277mm)	16W / 1680LM	16W / 1680LM	/	/	Available
GCCHA-GLH25-X	X* (529*529mm)	21W / 2205LM	21W / 2205LM	/	/	Available


Remark:

1. The tolerance of output data can be vary up to 10%
2. The output data is a typical value


Chain GLH25 Suspended

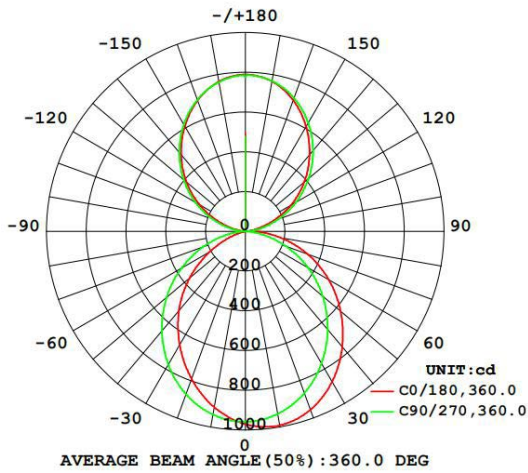


1.2m luminaire with Diffuser

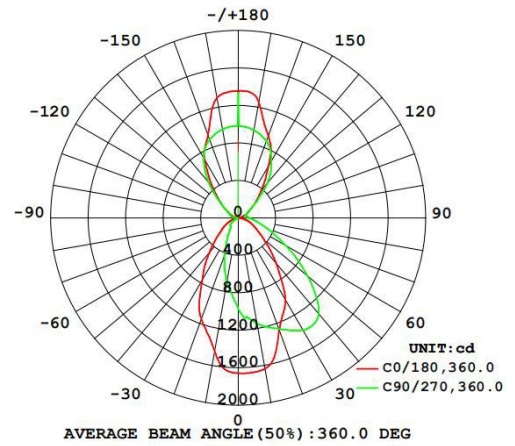

1.2m luminaire with Microprism

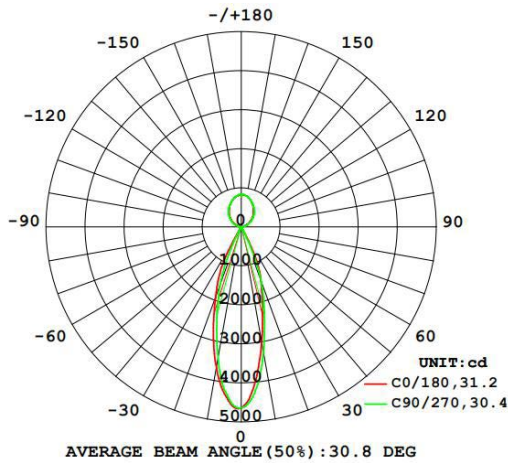

1.2m luminaire with Grating 30°

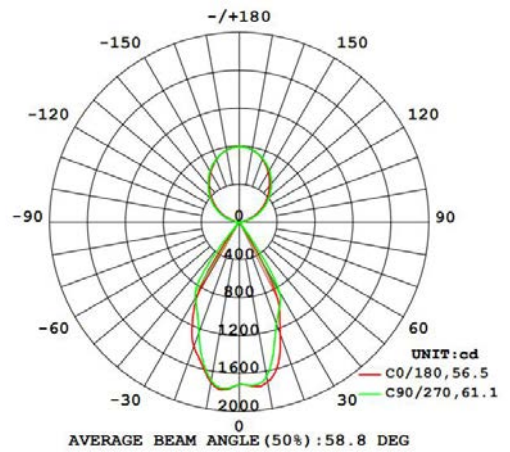

1.2m luminaire with Grating 60°