




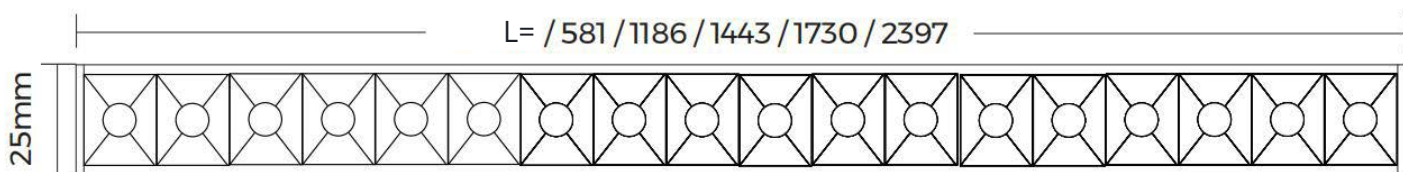

greenlux
cost reduction LED lighting

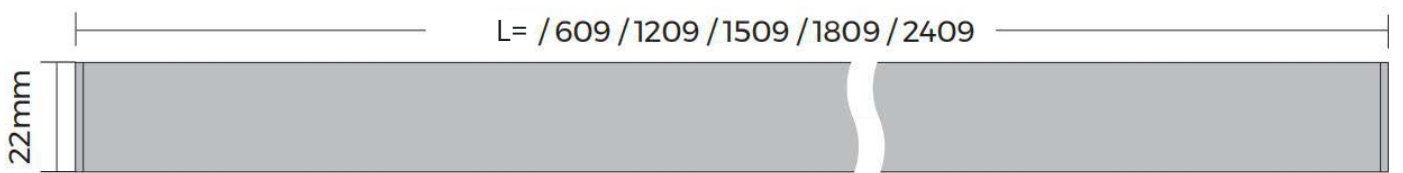

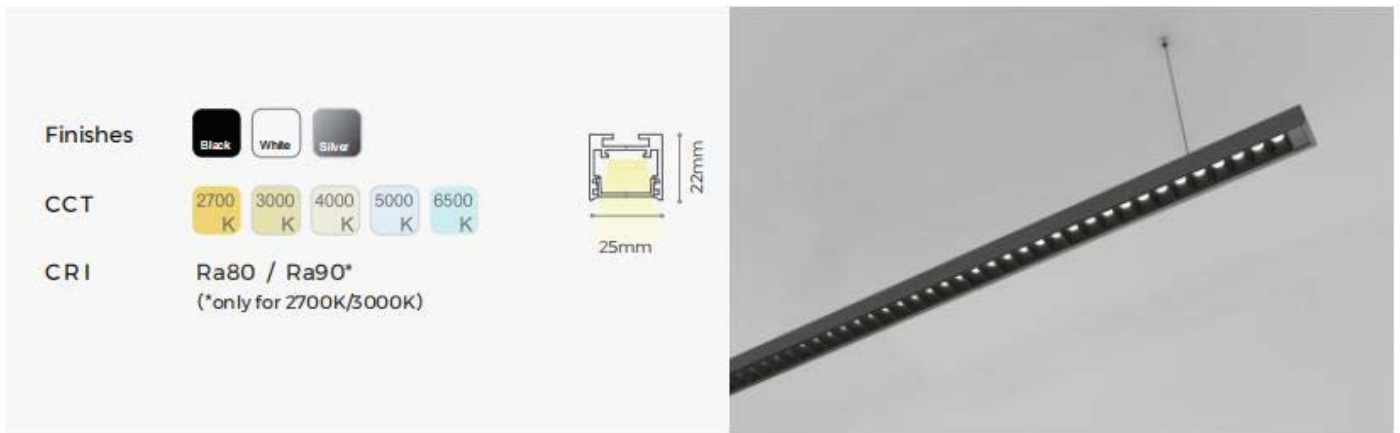


Chain GLS25 Suspended



- 25mm Slim Lighting Surface
- High Efficiency 105lm/W, Lumen Output Up To 2100lm/m
- Multiple Light Distribution Options:
Diffuser / Microprism / Grating 30° & 60° / Block Frosted Diffuser
- Multiple Standard Corner Options:
L Type / X Type / T Type
- Electric Wire & Suspension Wire 2-in-1 Invisible Design


Chain GLS25 Suspended

Optical & Electronic Data


| Model | Size |  Diffuser |  Microprism |  Grating 30° |  Grating 60° |  Block frosted diffuser |  Blind cover |
|-------------------|-------------------|--|--|---|---|--|---|
| GCCHA-GLS25-12W-H | 600mm | 12W / 1250LM | 12W / 1250LM | 12W / 850LM | 12W / 700LM | 12W / 1200LM | / |
| GCCHA-GLS25-24W-H | 1200mm | 24W / 2500LM | 24W / 2500LM | 24W / 1700LM | 24W / 1400LM | 24W / 2400LM | / |
| GCCHA-GLS25-30W-H | 1500mm | 30W / 3150LM | 30W / 3150LM | 30W / 2100LM | 30W / 1800LM | 30W / 3000LM | / |
| GCCHA-GLS25-36W-H | 1800mm | 36W / 3750LM | 36W / 3750LM | 36W / 2500LM | 36W / 2300LM | 36W / 3600LM | / |
| GCCHA-GLS25-48W-H | 2400mm | 48W / 5000LM | 48W / 5000LM | 48W / 3500LM | 48W / 3100LM | 48W / 4800LM | / |
| GCCHA-GLS25-L-H | L* (277*277mm) | 11W / 1155LM | 11W / 1155LM | / | / | / | Available |
| GCCHA-GLS25-T-H | T* (529*277mm) | 16W / 1680LM | 16W / 1680LM | / | / | / | Available |
| GCCHA-GLS25-X-H | X* (529*529mm) | 21W / 2205LM | 21W / 2205LM | / | / | / | Available |

Remark:


1. The tolerance of output data can be vary up to 10%
2. The output data is a typical value

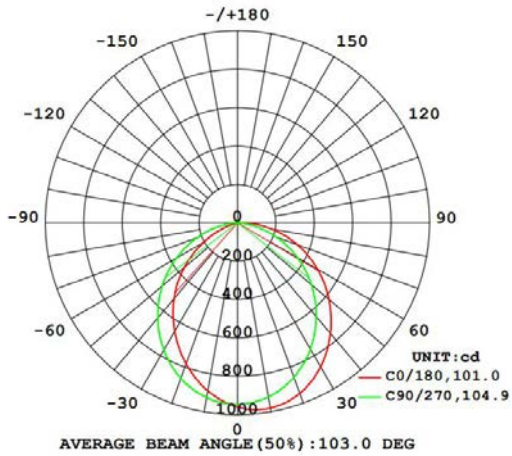


1.2m luminaire with Diffuser

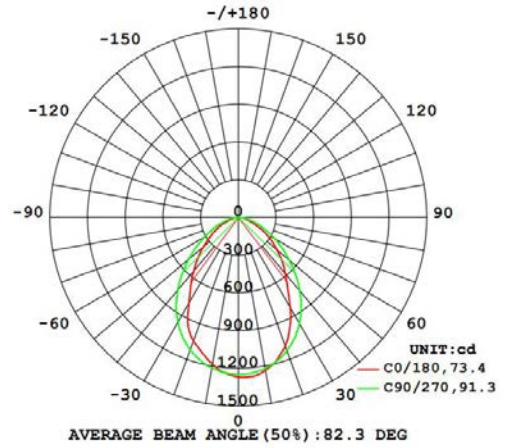


1.2m luminaire with Microprism

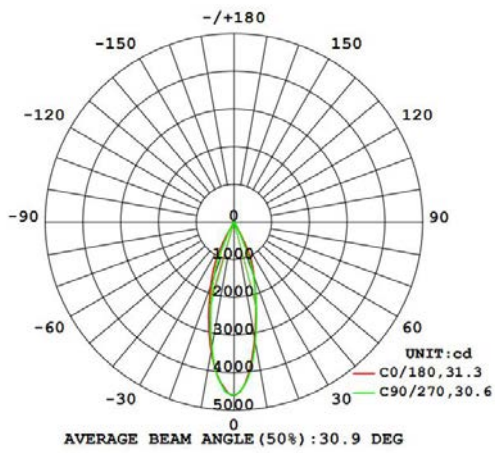

1.2m luminaire with Grating 30°

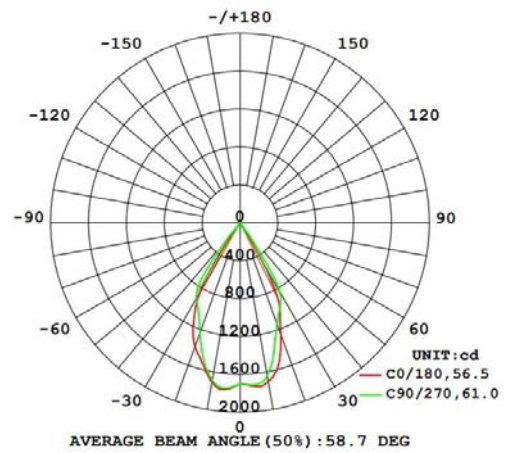

1.2m luminaire with Grating 60°

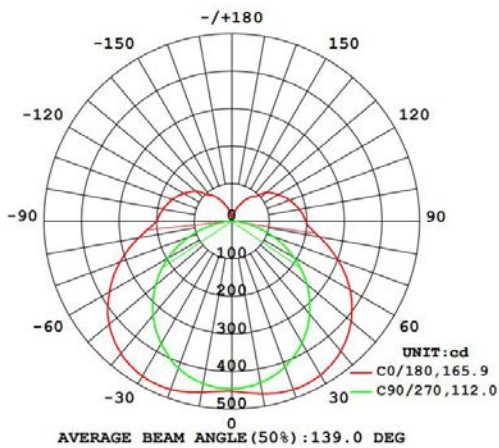

1.2m luminaire with Block frosted diffuser