



greenlux
cost reduction LED lighting

DL150 LED Deep Recessed Down Light

Multiple Wattages Available
80% lumen maintenance at 50,000 hours

- Excellent Thermal Dissipation
- Dimmable and Non-Dimmable option available
- Superb dimming effect
- COB LED chips with high luminous flux
- Aluminum profile provides excellent thermal dissipation
- IP20 Rated
- Applications include restaurants, offices, shops, schools, hotels & households. Also widely used for public areas such as stairways, lobby, receptions & corridors.

Specifications

Colour Range	2700-5000k
Power Consumption	13W / 20W / 25W
Lumen	115lm/W
Input Voltage	AC 100-240V
Dimming Range	8% ~ 100%
Beam angle	60°
CRI	>80 / >90
Power Factor	>0.9
Chipset	COB
Driver	Australian Safety Standard
Dimmable (option)	Triac / 0-10V / Dali



Dimensions & Materials

Product Dimensions (mm)	Cutout Ø150*123 Ø135-140
Housing Material	Aluminum Housing
Housing Colour	Black / White
Warranty	3 Yrs Residential 5 Yrs Commercial






greenlux
cost reduction LED lighting

DL150 LED Deep Recessed Down Light


Dimensions & Photometric

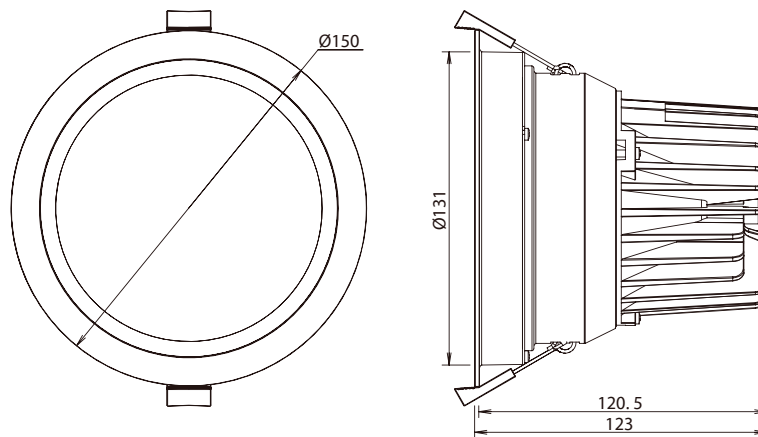

13W

20W


25W

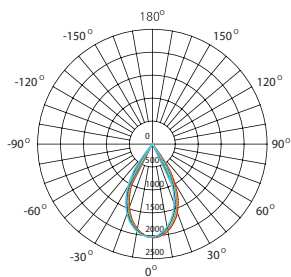

AVERAGE BEAM ANGLE (50%): 56.3DEG

UNIT: cd


- C0/180, 56.3 deg
- C30/210, 56.3 deg
- C60/240, 56.1 deg
- C90/270, 56.3 deg

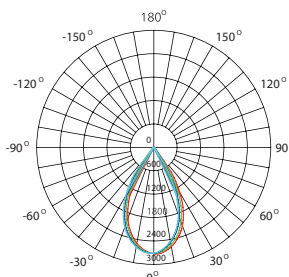

AVERAGE BEAM ANGLE (50%): 56.2DEG

UNIT: cd

- C0/180, 56.3 deg
- C30/210, 56.3 deg
- C60/240, 56.1 deg
- C90/270, 56.3 deg

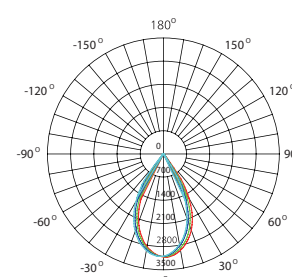

AVERAGE BEAM ANGLE (50%): 56.2DEG

UNIT: cd

- C0/180, 56.3 deg
- C30/210, 56.3 deg
- C60/240, 56.1 deg
- C90/270, 56.2 deg

Model#	Dimensions (mm)	Cutout (mm)	Beam Angle	CCT (k)	Lumens	Wattage	LED	Dimmer (option)
GUDL150-13W				2700	1520	13W	COB	Triac
GUDL150-20W	Ø150*123	Ø135-140	60°	3000 4000	2280	20W	COB	0-10V Dali
GUDL150-25W				5000	2810	25W	COB	