

Rectangle 280 LED Recessed Downlight



INTERIOR CEILING RECESSED





INTERIOR CEILING RECESSED



GVREC-21W-280

21W
 1056lm 3000K
 CRI>90
 LED
 EXCL.700mA 30V DRIVER




COLOR TEMPERATURE

- 2700K ●
- 3000K ●
- 4000K ●
- 5000K ○
- 6500K ●

FINISH

- AW
- AS
- OJ

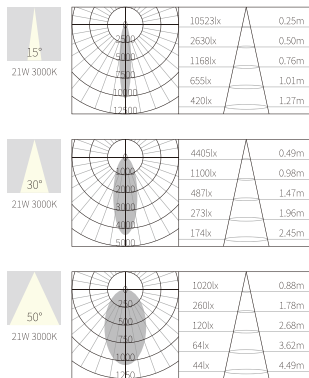

ACCESSORIES

REQUIREMENTS

AD0753 (KEGU)
AD0738 (TRIDONIC)
 Un:AC 220~240V
 Uout:DC 30V
 Iout:700mA

AD0883 (KEGU)
AD0865 (EUCHIPS)
 Un:AC 220~240V
 Uout:DC 30V
 Iout:700mA

AD0870 (EUCHIPS)
 Un:AC 220~240V
 Uout:DC 30V
 Iout:700mA

AD0853 (OSRAM)
AD0878 (VS)
 Un:AC 220~240V
 Uout:DC 30V
 Iout:700mA



ACCESSORIES


REQUIREMENTS

AD0753 (KEGU)
AD0738 (TRIDONIC)
 Un:AC 220~240V
 Uout:DC 30V
 Iout:700mA

AD0883 (KEGU)
AD0865 (EUCHIPS)
 Un:AC 220~240V
 Uout:DC 30V
 Iout:700mA



AD0870 (EUCHIPS)
 Un:AC 220~240V
 Uout:DC 30V
 Iout:700mA

AD0853 (OSRAM)
AD0878 (VS)
 Un:AC 220~240V
 Uout:DC 30V
 Iout:700mA



GVREC-42W-280

2*21W
 2368lm 3000K
 CRI>90
 LED
 EXCL.2*700mA 30V DRIVER



COLOR TEMPERATURE

- 2700K ●
- 3000K ●
- 4000K ●
- 5000K ○
- 6500K ●

FINISH

- AW
- AS
- OJ

