


Bright Circle B Series



SPECIAL FEATURES

- Rolled profile, seamlessly welded round luminaire. Aluminium housing.
- Easy installation with lightweight deep-drawn steel housing.

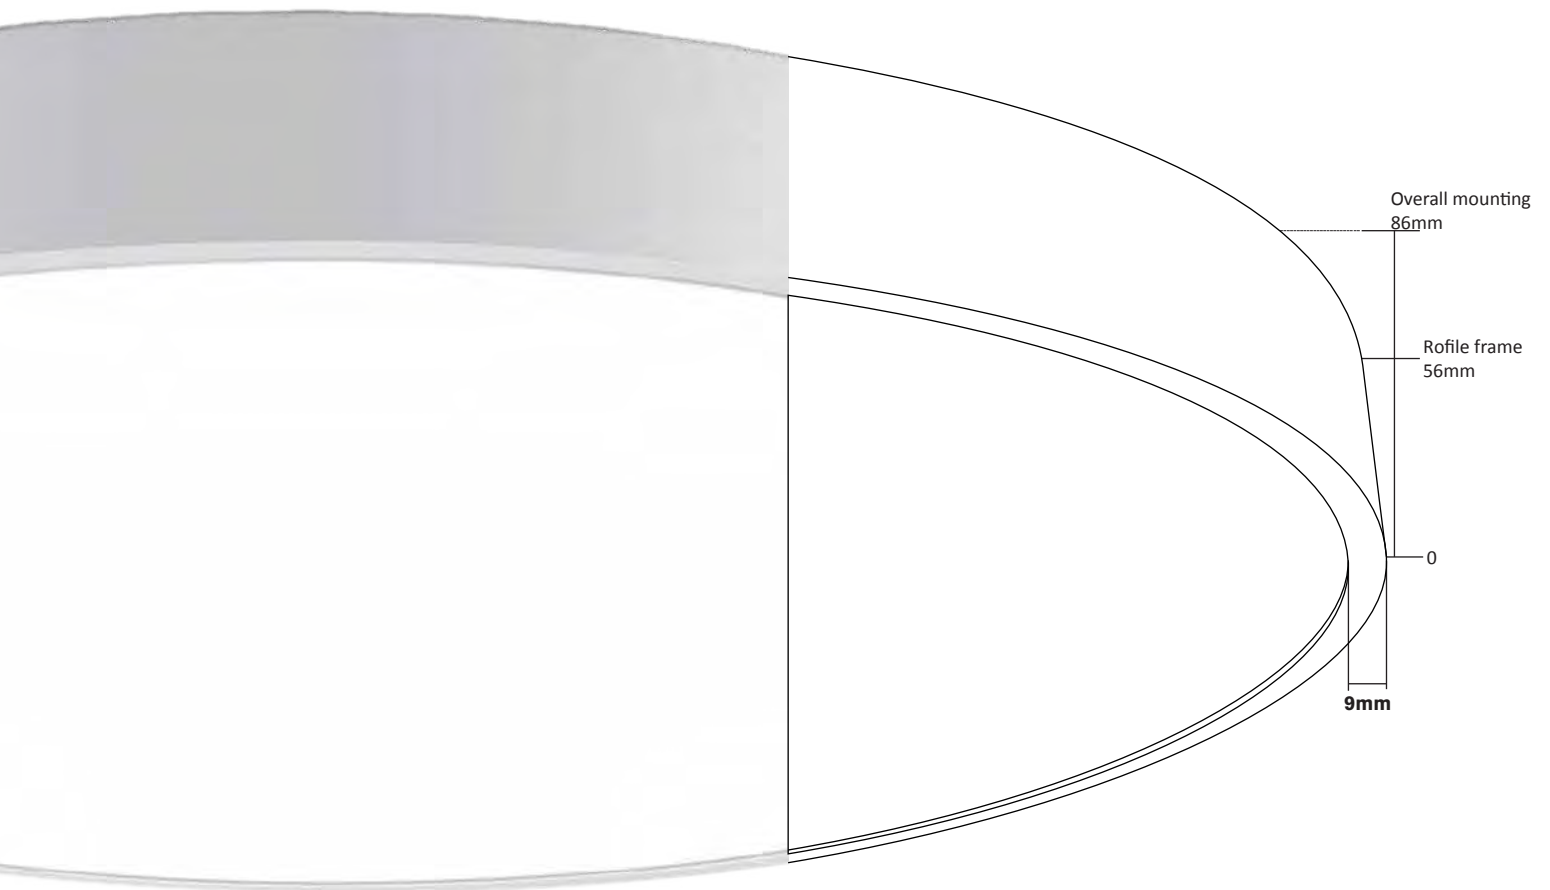

Bright Circle B Series

Surface / Ceiling Mounted

Specification

GENERAL

ceiling mounted

IP 20

LED

up to 120lm/w

2700-6500K

CRI >80Ra/90Ra

SDCM≤3

ESTIMATED LED LIFETIME

L90/50,000h

OPTICAL

direct,direct/indirect illumination

PS cover opal

microprismatic (LOW UGR)

beam angle (degree) : 110°

ELECTRICAL

non DIM, DIM DALI,DIM 1-10V, DIM TRAIC

PF>0.9

PHYSICAL

aluminium

powder-coated


MATERIAL COLOUR

black

white

COLOUR TEMPERATURE

2700-6500K optional






Microprismatic
(LOW UGR)



Direct / Indirect Light
Distribution

Bright Circle B Series

Surface / Ceiling Mounted



φ300mm

GHBRI-300-CS-B

DIRECT






SYSYTEM POWER	CCT	LOMINOUS EFFICACY
15W	2700-6500K	100LM/W
25W	2700-6500K	100LM/W

DIRECT/INDIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
15W	2700-6500K	100LM/W
25W	2700-6500K	100LM/W



φ750mm

GHBRI-750-CS-B

DIRECT






SYSYTEM POWER	CCT	LOMINOUS EFFICACY
50W	2700-6500K	100LM/W
70W	2700-6500K	100LM/W

DIRECT/INDIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
50W	2700-6500K	100LM/W
70W	2700-6500K	100LM/W



φ450mm

GHBRI-450-CS-B

DIRECT






SYSYTEM POWER	CCT	LOMINOUS EFFICACY
30W	2700-6500K	100LM/W
40W	2700-6500K	100LM/W

DIRECT/INDIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
30W	2700-6500K	100LM/W
40W	2700-6500K	100LM/W



φ900mm

GHBRI-900-CS-B

DIRECT






SYSYTEM POWER	CCT	LOMINOUS EFFICACY
70W	2700-6500K	100LM/W
90W	2700-6500K	100LM/W

DIRECT/INDIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
70W	2700-6500K	100LM/W
90W	2700-6500K	100LM/W



φ600mm

GHBRI-600-CS-B

DIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
40W	2700-6500K	100LM/W
60W	2700-6500K	100LM/W


DIRECT/INDIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
40W	2700-6500K	100LM/W
60W	2700-6500K	100LM/W

Bright Circle B Series

Product Range

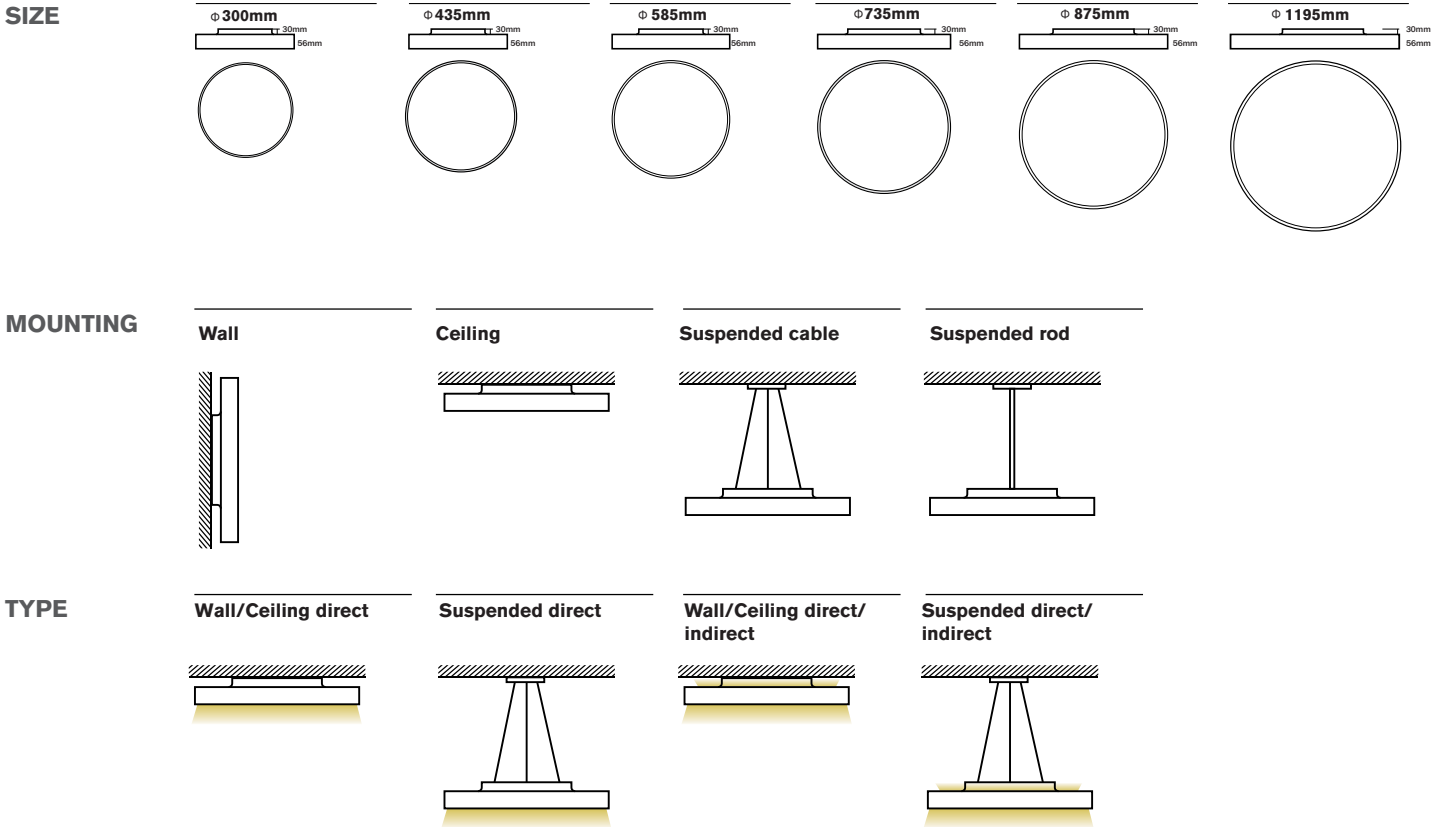

Bright Circle B Series

