

Bright Circle B Series

Suspended Rod



Specification

GENERAL

suspended rod mounted

IP 20

LED

up to 120lm/w

2700-6500K

CRI >80Ra/90Ra

SDCM≤3

ESTIMATED LED LIFETIME

L90/50,000h

OPTICAL

direct, direct/indirect illumination

PS cover opal

microprismatic (LOW UGR)

beam angle (degree) : 110°

ELECTRICAL

non DIM, DIM DALI, DIM 1-10V, DIM TRAC

PF>0.9

PHYSICAL

aluminium

powder-coated


MATERIAL COLOUR

black

white

COLOUR TEMPERATURE

2700-6500K optional

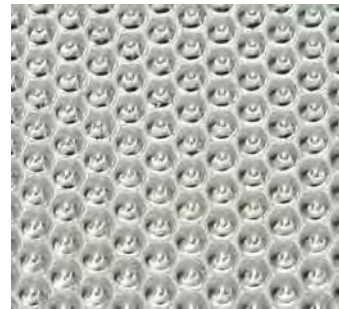


Microprismatic (LOW UGR)



Direct/ Indirect Light Distribution

Bright Circle B Series

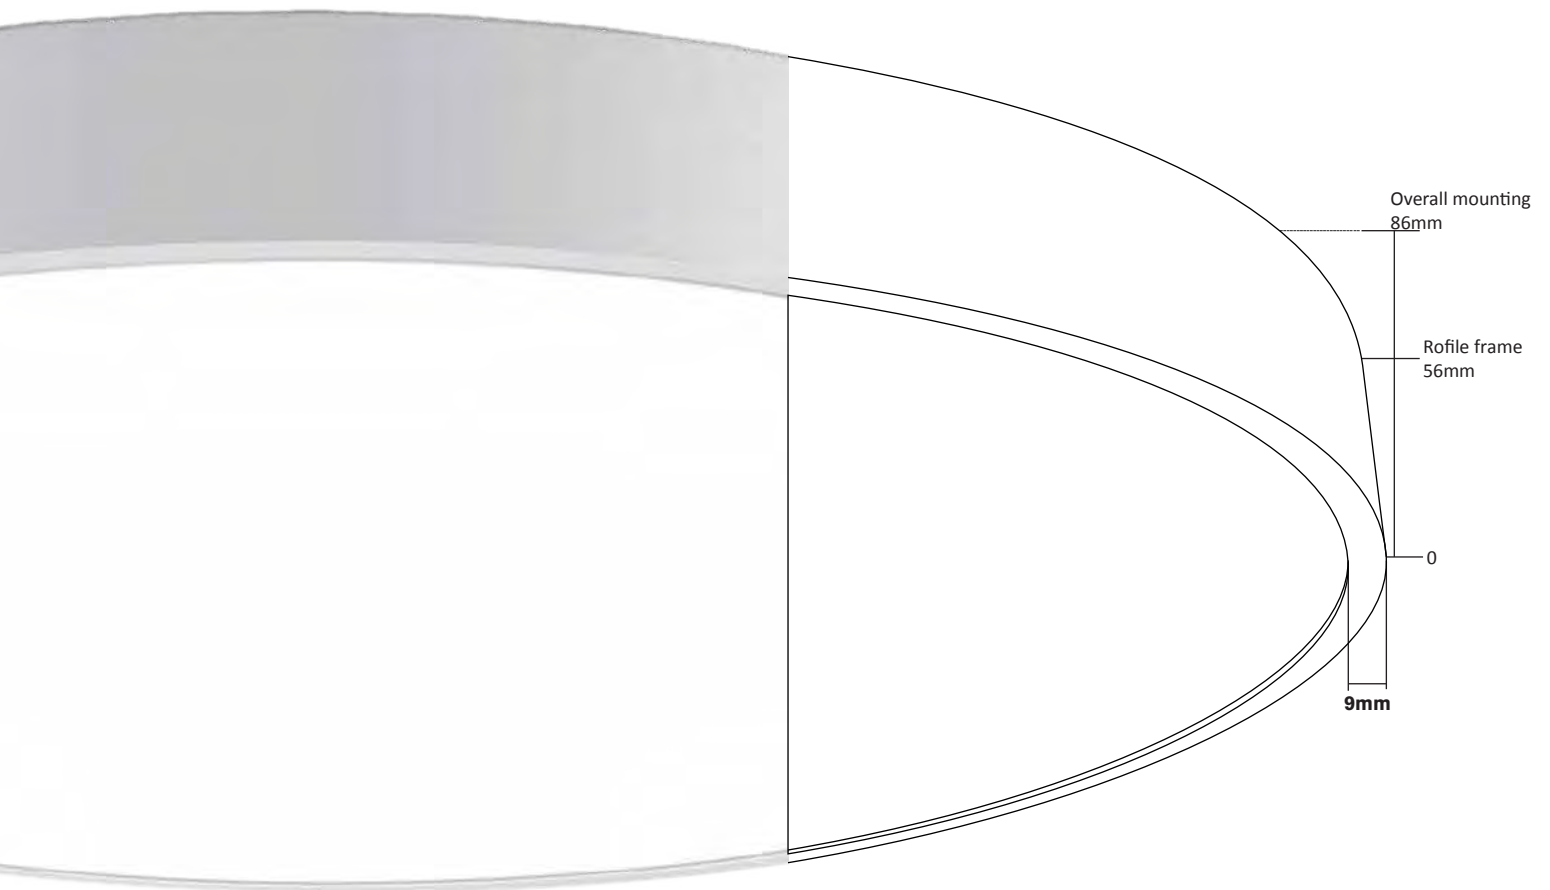


SPECIAL FEATURES

- Rolled profile, seamlessly welded round luminaire. Aluminium housing.
- Easy installation with lightweight deep-drawn steel housing.

Bright Circle B Series

Suspended Rod

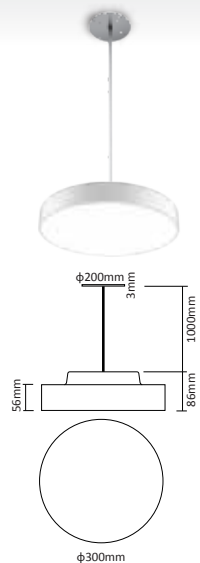

GHBRI-300-CR-B

DIRECT




SYSYTEM POWER	CCT	LOMINOUS EFFICACY
15W	2700-6500K	100LM/W
25W	2700-6500K	100LM/W

DIRECT/INDIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
15W	2700-6500K	100LM/W
25W	2700-6500K	100LM/W

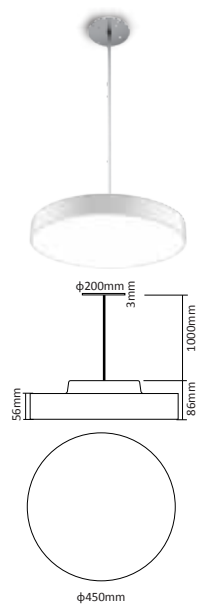

GHBRI-450-CR-B

DIRECT




SYSYTEM POWER	CCT	LOMINOUS EFFICACY
30W	2700-6500K	100LM/W
40W	2700-6500K	100LM/W

DIRECT/INDIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
30W	2700-6500K	100LM/W
40W	2700-6500K	100LM/W

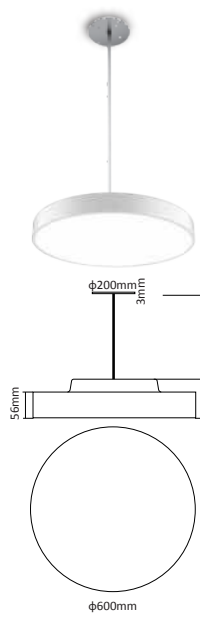

GHBRI-600-CR-B

DIRECT




SYSYTEM POWER	CCT	LOMINOUS EFFICACY
40W	2700-6500K	100LM/W
60W	2700-6500K	100LM/W

DIRECT/INDIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
40W	2700-6500K	100LM/W
60W	2700-6500K	100LM/W

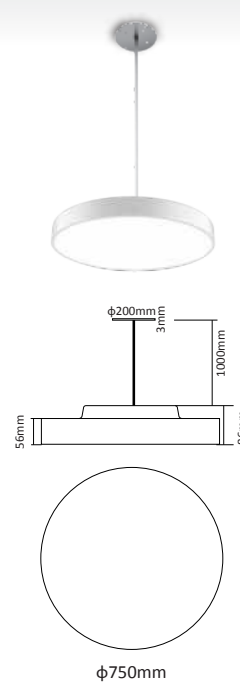

GHBRI-750-CR-B

DIRECT




SYSYTEM POWER	CCT	LOMINOUS EFFICACY
50W	2700-6500K	100LM/W
70W	2700-6500K	100LM/W

DIRECT/INDIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
50W	2700-6500K	100LM/W
70W	2700-6500K	100LM/W

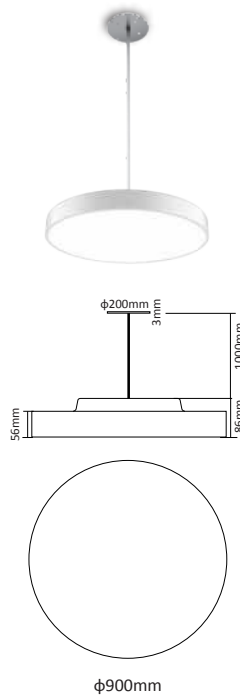

GHBRI-900-CR-B

DIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
70W	2700-6500K	100LM/W
90W	2700-6500K	100LM/W


DIRECT/INDIRECT



SYSYTEM POWER	CCT	LOMINOUS EFFICACY
70W	2700-6500K	100LM/W
90W	2700-6500K	100LM/W

Bright Circle B Series

Product Range

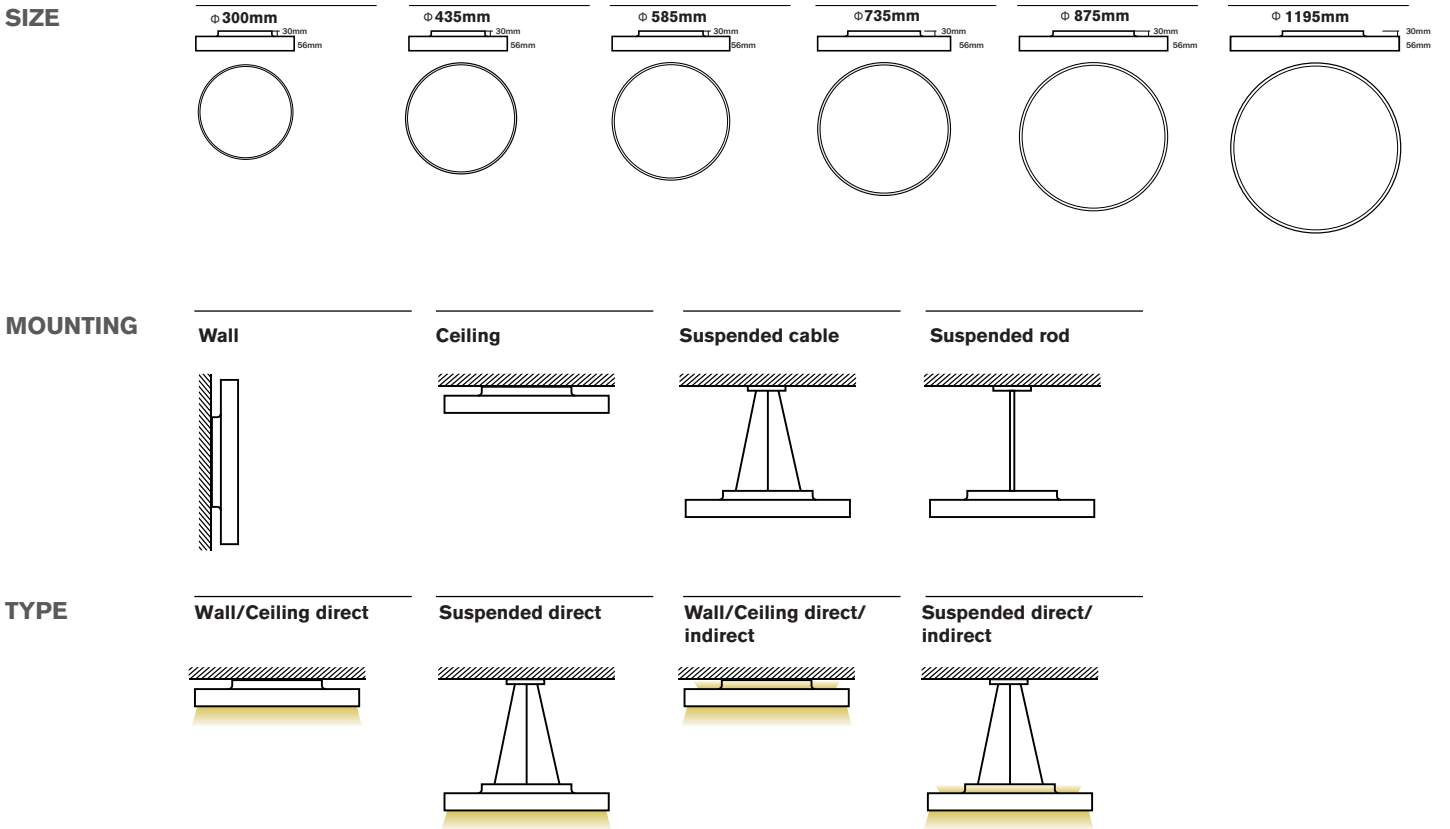

Bright Circle B Series

