

Tita 92

Fixed LED Downlight


Model: GVTIT-10W-F

Product Features

- Low UGR design
- Slim trim design



Outer Dimensions

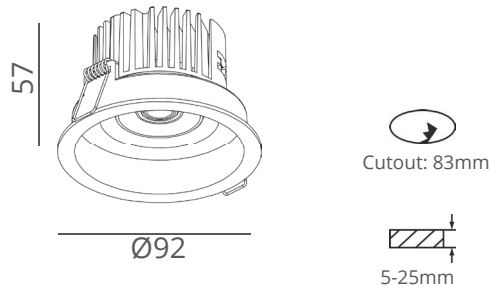

Light Distribution

3000K 36°

h(m)	E(lx)	Ø(m)
1	1218	Ø0.65
2	304.6	Ø1.30
3	135.4	Ø1.95
4	76.15	Ø2.60
5	48.74	Ø3.25

Photometric 3000K 36D Rta.90

Specification

Technical Data

Light source: Citizen CLU028
 System wattage: 10W (250mA, 36V)
 Lumen flux: 650lm (10W, 36D, 3000K, Ra.90)
 Colour temperature: 2700K, 3000K, 4000K
 Colour rendering index: Ra≥90
 Chromaticity rate: 3 MacAdam
 Beam angle: 24D, 36D, 60D, Lens Type
 Service lifetime: 50,000hrs, L70
 Ingress protection: IP54 Installed
 Operation voltage: 220-240Vac, 50/60Hz
 Operation temperature: -20~40D
 Protection class: III
 Mounting: Ceiling Recessed, spring type

Lighting control

Tridonic non-dim, ECG standard
 Actec triac dim
 0-10V, Dali dimming upon request

Finish

White RAL9003, Gloss 5
 Black RAL9005, Gloss 5

Material

Aluminum

Warranty

3 Years for residential
 5 years for commercial