


Cambered Neon Series Flexi NR25 (Round)

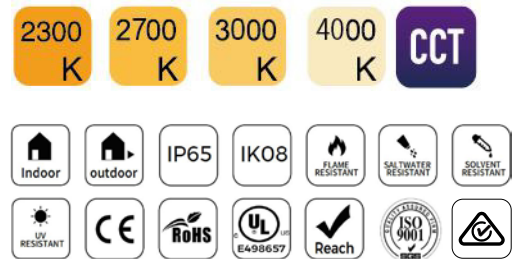


▼ Features

- ※ Light source: High luminous efficiency, LM80 test proved.
- ※ Process & Material: High light transmittance, food-grade environmental silicone material, integrated extrusion molding technology, High protection level.
- ※ Optical Design: Unique optical light distribution structure design, uniform lighting surface and no shadow.
- ※ Appearance Design: Compared with the traditional neon tube or PVC guardrail tube, the silicone material has good flexibility, the simple and stylish appearance, which is exquisite and unique.
- ※ Product Certification: UL, CE, ROHS, SAA.
- ※ Environmental Features: Resistance to saline solutions, acids & alkali, corrosive gases and UV.
- ※ Working/Storage Temperature: Ta: -20~55°C / 0°C ~ 60°C.
- ※ Life Span: 50000H, 5 years warranty.

▼ Product Application


- ※ 3-dimensional space styling
- ※ Indoor decorative lighting

▼ Product Bending Application

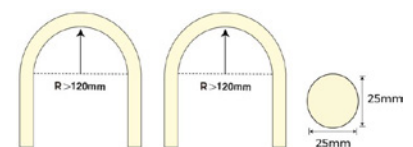


▼ Product's protective technology & structure size

IP65 Top outlet

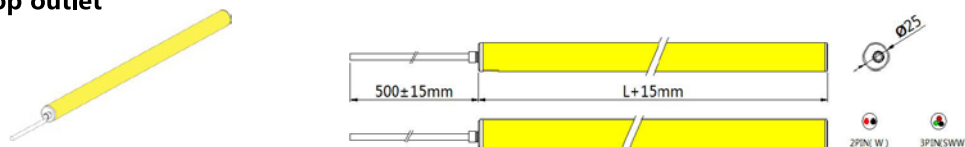

IP65 Side outlet

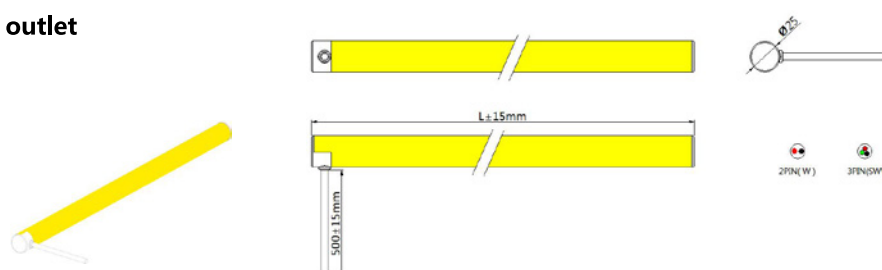

Cambered Neon Series Flexi NR25 (Round)


▼ Basic Parameters

Model	CCT/colours	CRI	Input voltage (V)	Rated current (A)	Rated power (w)	Lumens (LM)	Size (mm)	Max.length	Remark
GCFLN-14.4W-R25	2300K	>90	24V	0.6	14.4	850	Φ25	5000mm	No cutting
	2700K					950			
	3000K					950			
	4000K					950			
	2300K~4000K					750			

Note:


1. The above data is the testing result of 1M standard product;
2. The power and lumens of output data can be vary up to $\pm 10\%$;
3. The above parameters are all typical values.

▼ Light Distribution

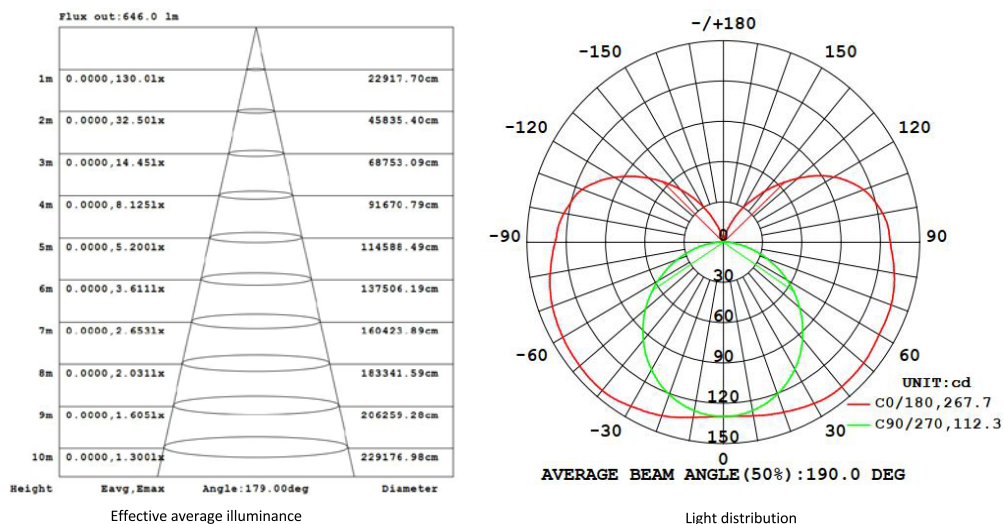







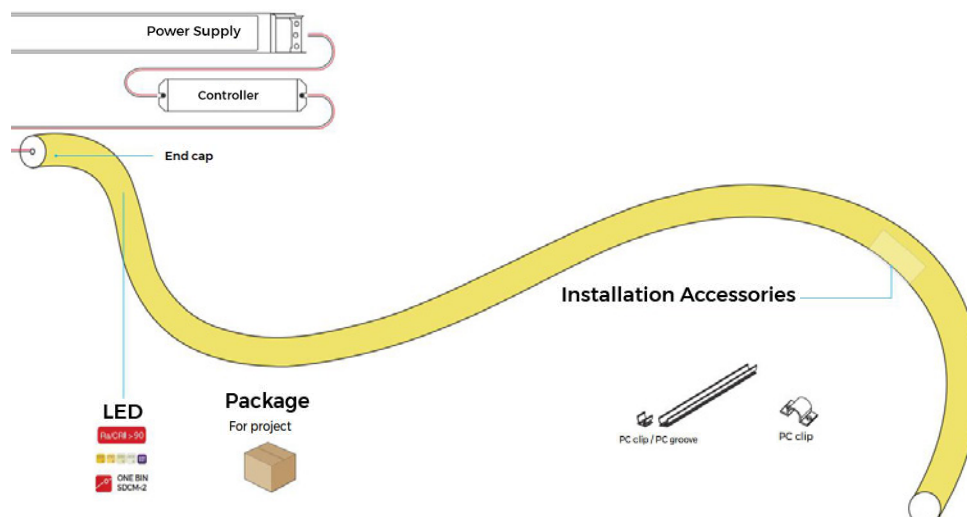

Note: The above data are based on the colour temperature of 4000K monochrome.

▼ Product System Solution





Cambered Neon Series Flexi NR25 (Round)


▼ Accessory Information

Name	Description	Image	Sectional size	Ordering code	Product quantity/case (PCS)	Product quantity/case (kg)	Net weight per box (kg)	Gross weight (kg)	Gross weight (mm)	Remark
PC carrier	Flat mounting PC groove			GC-NNR25P-1000	30	0.1	3	4	1290*112*50	Size: L1000*W26*H21.5mm, with screws
PC carrier	Flat mounting of PC clip			GC-NNR25P-60	100	0.01	1	1.2	250*250*150	Size: L60*W26*H21.5mm, with screws
PC carrier	Flat mounting of PC clip			GC-NNR25P1-25	100	0.01	1	1.2	250*250*150	Size: L25*W51.6*H27.8mm, with screws
connector	2PIN IP68 Waterproof connector		/	GC-FC-0001	512	0.016	8.192	9.5	365*365*190	Suitable for single color strip
connector	3PIN IP68 Waterproof connector		/	GC-FC-0002	512	0.018	9.216	10.2	365*365*190	Suitable for SWW strip

▼ Product Control System Solution

Name	Model	Ordering code	Parameters	Dimming constant-voltage acceptor	Suitable products
 Single color dimming set	M1+M4-5A	23-01-00-0045	Operating voltage: 3VDC (Battery CR2032) Operating frequency: 433.92MHz Remote control distance: 30m Operating temperature: -30°C 55°C	Input voltage: 12-24VDC Maximum loaded current: 5A*4CH Max 20A Maximum loaded power: 240W/480W(12V/24V) Operating temperature: -30°C 55°C Size: L170*W44*H30(mm) Package size: L228*W155*H32(mm)	White color strip
 CCT set	M2+M4-5A	23-01-00-0005	Operating voltage: 3VDC (Battery CR2032) Operating frequency: 433.92MHz Remote control distance: 30m Operating temperature: -30°C 55°C	Input voltage: 12-24VDC Maximum loaded current: 5A*4CH Max 20A Maximum loaded power: 240W/480W(12V/24V) Operating temperature: -30°C 55°C Size: L170*W44*H30(mm) Package size: L228*W155*H32(mm)	SWW dual CCT LED strip


▼ Wiring Diagram

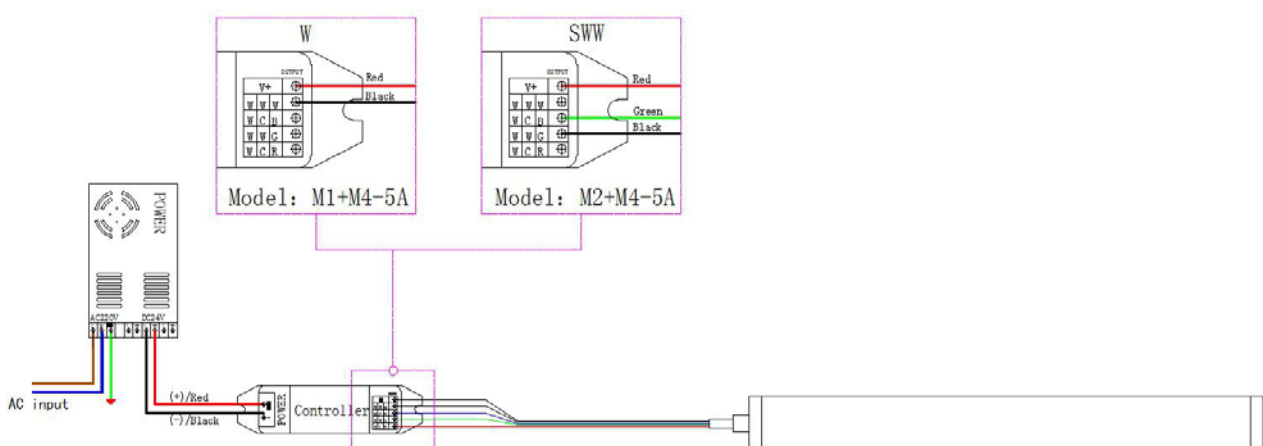


Cambered Neon Series Flexi NR25 (Round)

▼ Installation Guidance

Installation of clip

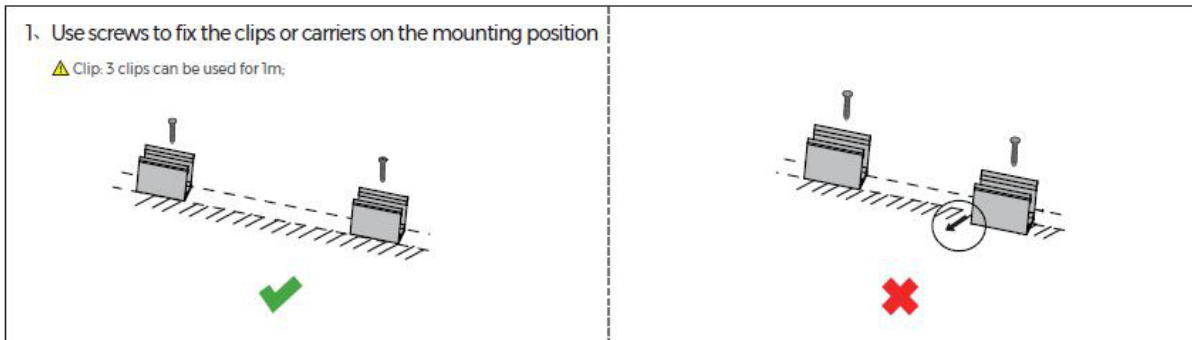

Installation of carrier

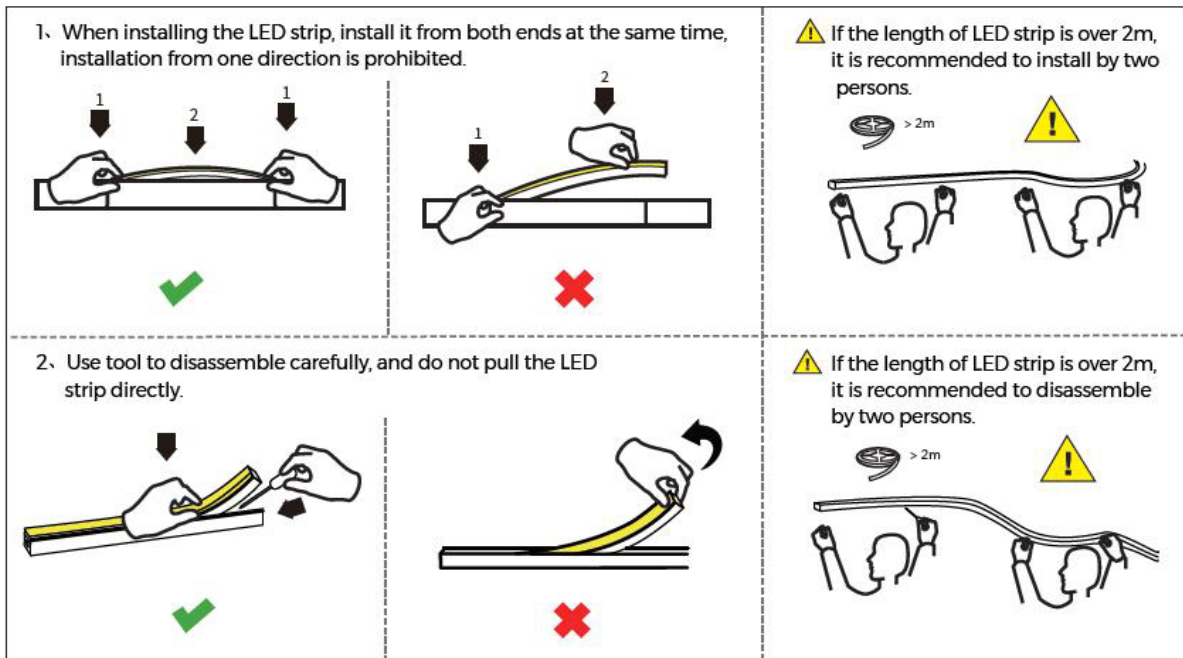

Cambered Neon Series Flexi NR25 (Round)

▼ Precautions

- Use a 24V DC isolated power supply to drive the neon lamp strip and the ripple wave of constant voltage source shall be less than 5%. It is not allowed to use RC voltage reduction or non-isolated power supply to drive the neon lamp strip.
- In actual applications, 20% of the power supply shall be kept (only 80% of the power is used) to guarantee that sufficient voltage is available to drive the product.
- Attention shall be paid to safe operating procedures. After powering on, it is not allowed to touch the AC power supply to avoid an electric shock.
- Attention shall be paid to the positive and negative poles of the wires during installation and whether the power supply conforms to required voltages to avoid damages.
- Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
- Please do not bend the strip into an arc with a diameter less than 120mm to ensure the longevity and reliability, the bending diameter too small will damage the product.
- If the actual length of application exceeds the specified using length, it will lead to overload heating and uneven brightness.
- To keep the eyes from being harmed, try to avoid staring at the glowing side of the LED strip for a long time.
- Non-professionals are prohibited from installing, disassembling and repairing the product.
- Do not use any acid or alkaline adhesive to fix products (including not limited to glass cement, etc.)
- Product is not suitable for use in swimming pools and fountains.
- Please confirmed before usage, the colour of the product might be slightly different due to their structural differences.
- It is forbidden to cut the product to avoid lamp body damage due to improper operation.

