

# **Flexi 20D LED Strip**

GSFLE-29W-20D-24V




# Features

- Available in 24V DC maximum
- Very bright & low power consumption
- Operating temperature: -20~50°C.
- Long life span LED lights, more than 50,000 hours+
- Adhesive back, peel & stick
- All available controller or dimmers
- Non Water-proof, IP20
- Beam Angle 120°
- Package: 5m / Reel
- CRI: >80 / >90 Options
- Size: L5000\*W20\*H3 (mm)
- Cut section: 50 (mm)
- Certifications: CE, SAA, RoHS
- Warranty: 3 Years residential, 5 Years commercial



# Engineering Drawing


## Top View

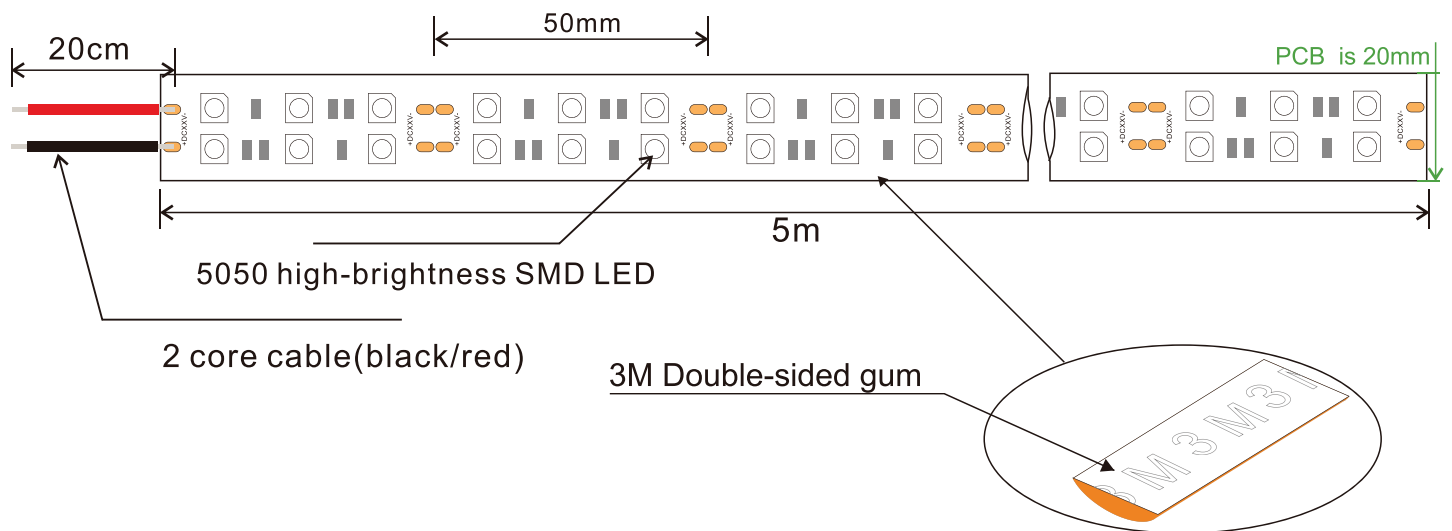




## Top View

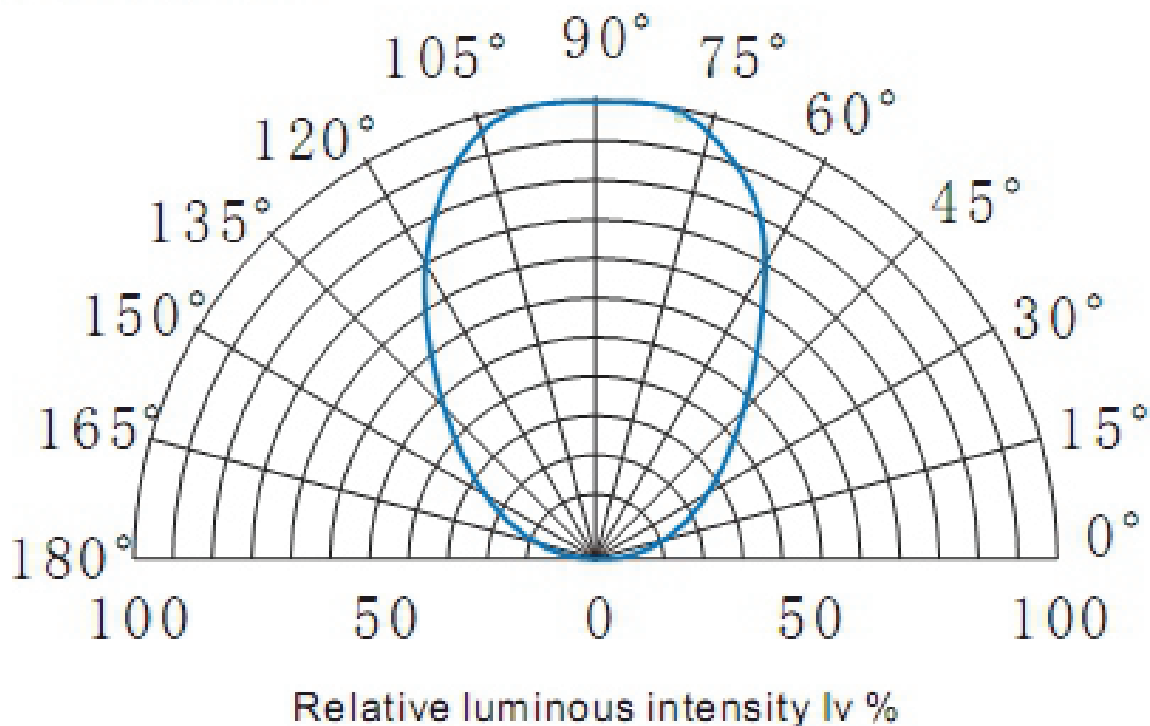

# Radiation Diagram




## LED Light Distribution

Flexi 20D LED/meter-Double rows								
Model	Size	Colour	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/M	Packing/M
GSFLE-29W-20D-24V	L5000*W20*H3	WW 	6	120	1500	24V	29W	5 Meters/reel
GSFLE-29W-20D-24V		NW 			2280			
GSFLE-29W-20D-24V		CW 			2400			

# How to connect flexible strip

Below shows you how to connect the flexible strip(single colour) to power supplies.

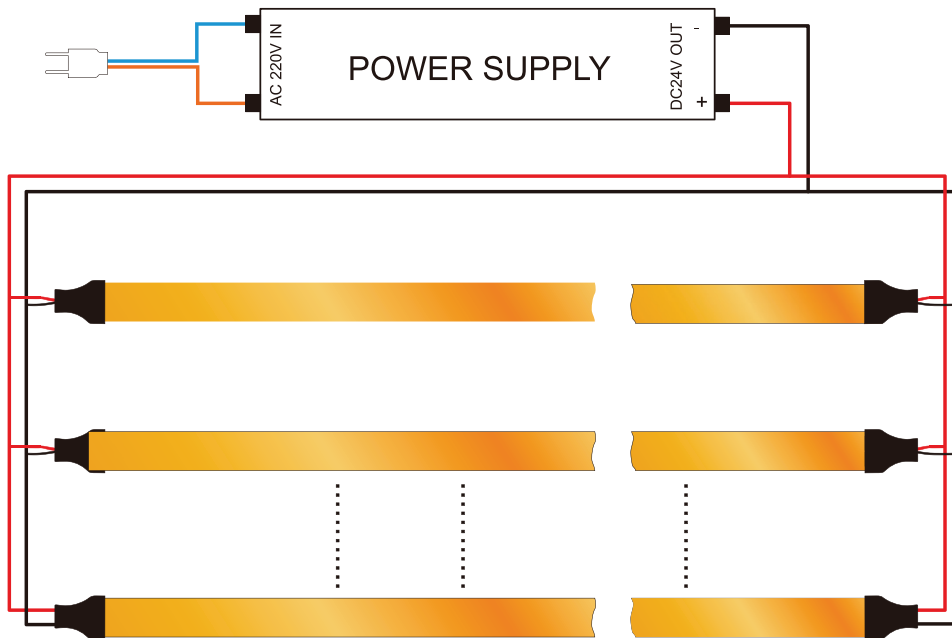

## Note:

Please note that, the LED strips should not be used in sealed or hot place, to make sure the heat Dispersion is good for the LEDs.

Each flexible strip with a total length of the series can not be more than 5 meters.

Flexible strip with all of the total power can not exceed 90% of the power switching power supply.

## Color Spectrum (CRI80)

