

Cusp

LED Track Spot Light

LM80

5 Yrs
Warranty



SAA

IP20

TUV

9/331 Ingles Street
Port Melbourne VIC 3207 Australia

info@greenlux.com.au
sales@greenlux.com.au

T **1300 650 625**
www.greenlux.com.au




Features

- 350° in horizontal direction and 90° in vertical direction.
- Brand Citizen cob led light source, high quality, reliable performance. CRI80 CRI90 CRI97 for options.
- Supreme 6063 aluminum heat sink with great heat dissipation.
- Anti-glare PMMA lens with great lighting distribution.
- Beam angle: 15D/24D/36D available.
- Trims: Standard/honeycomb/shutter for optional.
- Adjustable lighting orientation with 350 degree in horizontal direction and 90 in vertical direction.
- 1-circuit and 3-circuit adapters are all available.



Measurement

Model	Dimension(mm)				Size(mm)	Product Weight (Kg)	
	A	B	C	D		N.W/PC	G.W/PC
12W	243	150	65	84	84*65*243	0.47	0.58
25W	291	200	85	93	93*85*291	0.68	0.7
35W	291	200	100	108	108*100*291	0.79	0.9

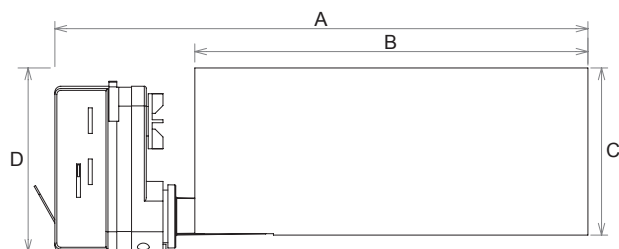

Technical Data Sheet

Model No.		GKCUS-12W	GKCUS-25W	GKCUS-35W
Watt(W)		12W	25W	35W
Dimension(mm)		84*65*243	93*85*291	108*100*291
Rated Input Voltage(V)		AC230V		
Input Voltage(V)		AC220-240V		
LED		COB		
SDCM		-		
CCT(K)		2700K / 3000K / 4000K / 5000K		
"Luminous Flux (lm) ±10%"	Non-DIM	1020~1200	2375~2750	3150~3675
	DIM	970~1140	2255~2610	2995~3490
LED Driver		Built-in		
Protection Class		Class I		
CRI		≥80		
Beam Angle (°)		24° / 45°	15° / 24° / 36°	
DIM		Triac		
IP Rating		IP20		
IK Rating		-		
Finishing colour		White exterior + Black interior / Fully black		
Material		PC / Aluminium		
Lifetime (hr)		50,000h		
Glow wire test (°C)		750°C		
Operating Temp.(°C)		-20°C~45°C		
Storage Temp.(°C)		25°C		
Installation		Track		
Brand Driver option		-		