

Premium 906S LED Emergency Spitfire

Features

Standard Feature


- Comply to SAA/AS2293 Standard
- Surface Mounted
- Quick & Easy to Install and Maintain
- Low Power Consumption
- Low spaces illuminate, from 2 to 5m height
- Long lifespans
- Low Volt Cut-Off Preventing
- Battery Overdischarge Preventing
- Light warranty 5 Yrs / Battery 1 Yr
- Charging Indicators
- D32 Classification
- Slimline Control Box & Battery
- Robust design, used in many commercial & industrial installations



Electrical Feature

- Product Name: LED Emergency Spitfire
- Model No.: GSPRE-2W-906S / GSPRE-5W-906S
- LED Capacity: 2W / 5W
- Light Source: Cree LED
- Lumen Output: 146lm / 250lm
- Battery: Type - LiFePO4 / 2000mAh 3.7V
- Change-Over Time: <2Sec.
- Charging Time: <16Hr.
- Standby Time: >2Hr.
- Input Voltage: AC240V/50-60Hz
- Materials: Heat Sink - Aluminum / Surface Plate - Flame Retardant PC
- Installation: Surface Mounted
- Cutout Hole: /
- Accessory: LED Lamp(with 140mm adapter plate) / Inverter / Battery Pack / 2m lead wire
- Operating Temperature: -40°C ~ +74°C
- IP Grade: IP30

Dimensions (unit: mm)

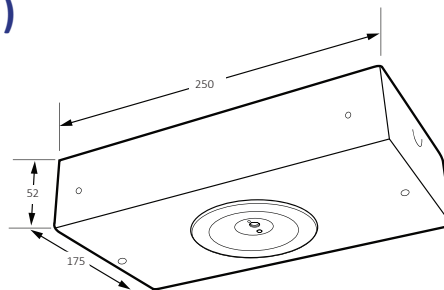

Surface ceiling mounting
250*175*52mm

