

# Tempest LPC / Up-Down LUPC Suspension Linkable Light




## FEATURES:

- Aluminum body, PC cover
- Replaceable LED strips
- Isolated LED driver
- 5 years warranty
- 100-277V, 50-60Hz
- 120° beam angle
- Easy maintenance
- CRI > 83 (CRI >92 optional)
- Linkable


## OPTIONS:

- 2FT/4FT/5FT/8FT
- CCT 3000K/4000K/5000K/6500K
- Dimmable
- Microwave motion sensor
- Emergency battery back up
- Colour: White, Silver, Black



| MODEL NO.             | WATTAGE          | DIMENSION (mm)<br>L * W * H | LUMENS          |
|-----------------------|------------------|-----------------------------|-----------------|
| GOTEM-20W-2F-LPC      | 20W              | 564x84x74                   | 2100lm/2600lm   |
| GOTEM-40W-4F-LPC      | 40W              | 1193x84x74                  | 4200lm/5200lm   |
| GOTEM-60W-4F-LPC      | 60W              | 1193x84x74                  | 7200lm          |
| GOTEM-50W-5F-LPC      | 50W              | 1493x84x74                  | 5250lm/6500lm   |
| GOTEM-60W-5F-LPC      | 60W              | 1493x84x74                  | 6300lm/7800lm   |
| GOTEM-80W-8F-LPC      | 80W              | 2384x84x74                  | 8400lm/9600lm   |
| GOTEM-120W-8F-LPC     | 120W             | 2384x84x74                  | 14400lm         |
| GOTEM-20/20W-2F-LUPC  | UP:20W DOWN:20W  | 564x84x74                   | 4200lm/5200lm   |
| GOTEM-10/20W-2F-LUPC  | UP:10W DOWN:20W  | 564x84x74                   | 3150lm/3900lm   |
| GOTEM-10/30W-4F-LUPC  | UP:10W DOWN:30W  | 1193x84x74                  | 4200lm/5200lm   |
| GOTEM-20/40W-4F-LUPC  | UP:20W DOWN:40W  | 1193x84x74                  | 6300lm/7800lm   |
| GOTEM-40/40W-4F-LUPC  | UP:40W DOWN:40W  | 1193x84x74                  | 8400lm/10400lm  |
| GOTEM-25/50W-5F-LUPC  | UP:25W DOWN:50W  | 1493x84x74                  | 7875lm/9000lm   |
| GOTEM-50/50W-5F-LUPC  | UP:50W DOWN:50W  | 1493x84x74                  | 10500lm/13000lm |
| GOTEM-40/60W-5F-LUPC  | UP:40W DOWN:60W  | 1493x84x74                  | 10500lm/13000lm |
| GOTEM-60/60W-5F-LUPC  | UP:60W DOWN:60W  | 1493x84x74                  | 12600lm/15600lm |
| GOTEM-40/80W-8F-LUPC  | UP:40W DOWN:80W  | 2384x84x74                  | 12600lm/15600lm |
| GOTEM-80/80W-8F-LUPC  | UP:80W DOWN:80W  | 2384x84x74                  | 16800lm/20800lm |
| GOTEM-60/120W-8F-LUPC | UP:60W DOWN:120W | 2384x84x74                  | 21600lm         |

## Product Design

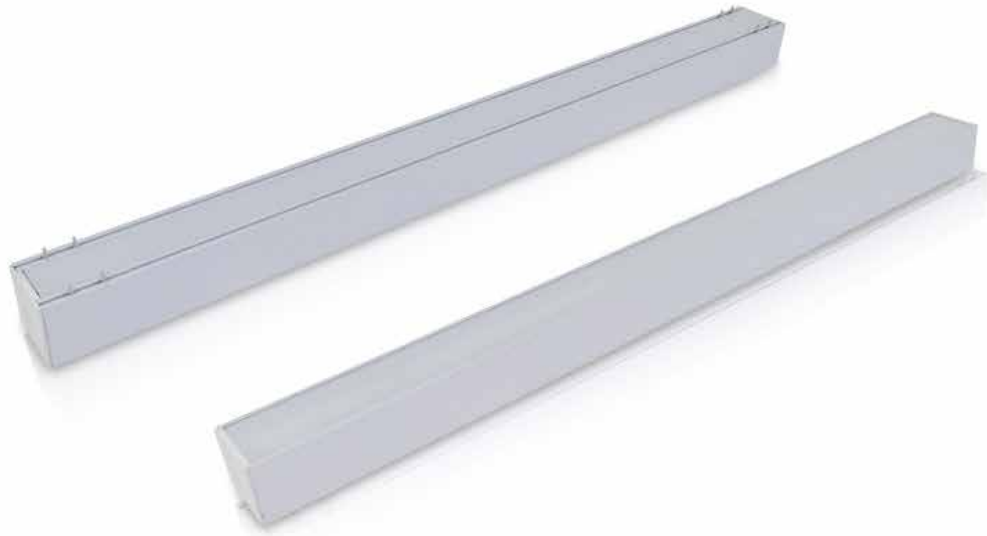

**Aluminum body**

Good heat dissipation and durable



**Aluminum heat sink**



**Isolated LED driver**



## PC Cover

---



Down



Up

## Replaceable LED Strips

---



Down



Up

## Customised Function

---



Microwave  
motion sensor



Emergency battery



347v 480V



0~10V  
dimming

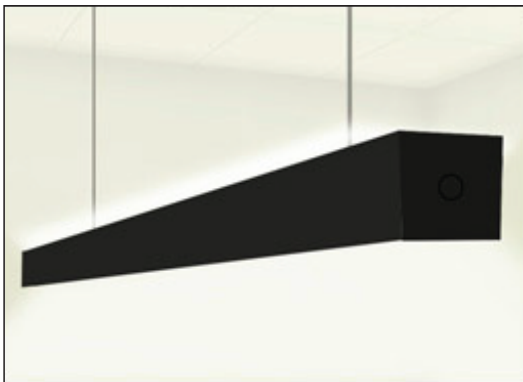
## Linkable

---



## Up and Down Lighting

---



## Colour of The Product

---



White



Silver



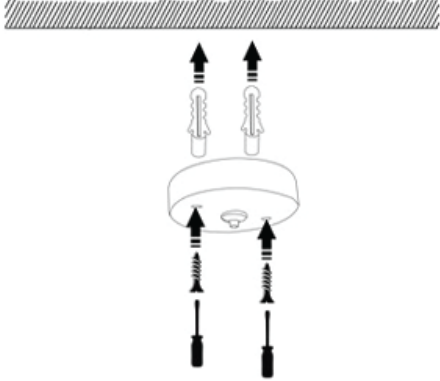
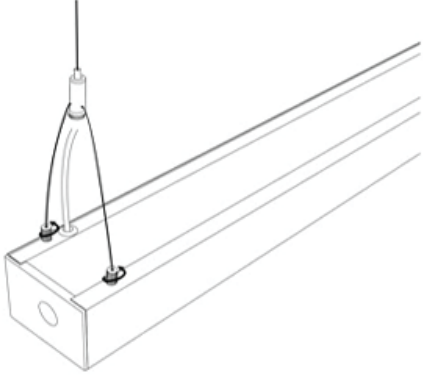
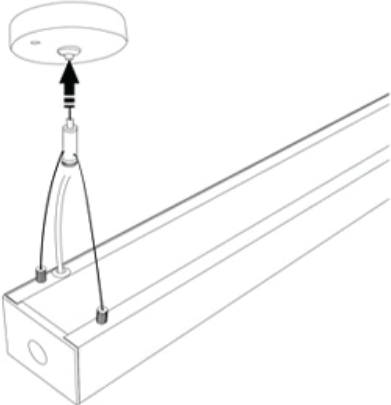
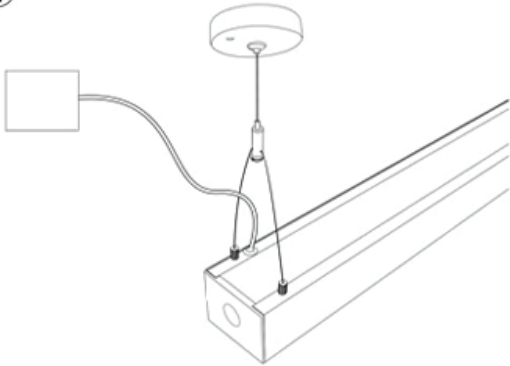
Black

## Accessories



## Installation Instructions

Ensure that power is turned off before installation.

|   |   |
|---|---|
| <p>Pass the main power cord through the hole of the canopies; then mounting the canopies on the ceiling</p> | <p>Screwed the hanging cable one the light fixture</p>  |
| <p>①</p>                 | <p>②</p>  |
| <p>Pass the hanging cable through the hanging kit by pressing its spring</p>                                | <p>Connect the power wire to the main power supply</p>  |
| <p>③</p>                 | <p>④</p>  |