




Chain GLS40/GLH40/GLE40 Series

Standard Linear Surface Mounted / Suspension / Recessed Luminaire

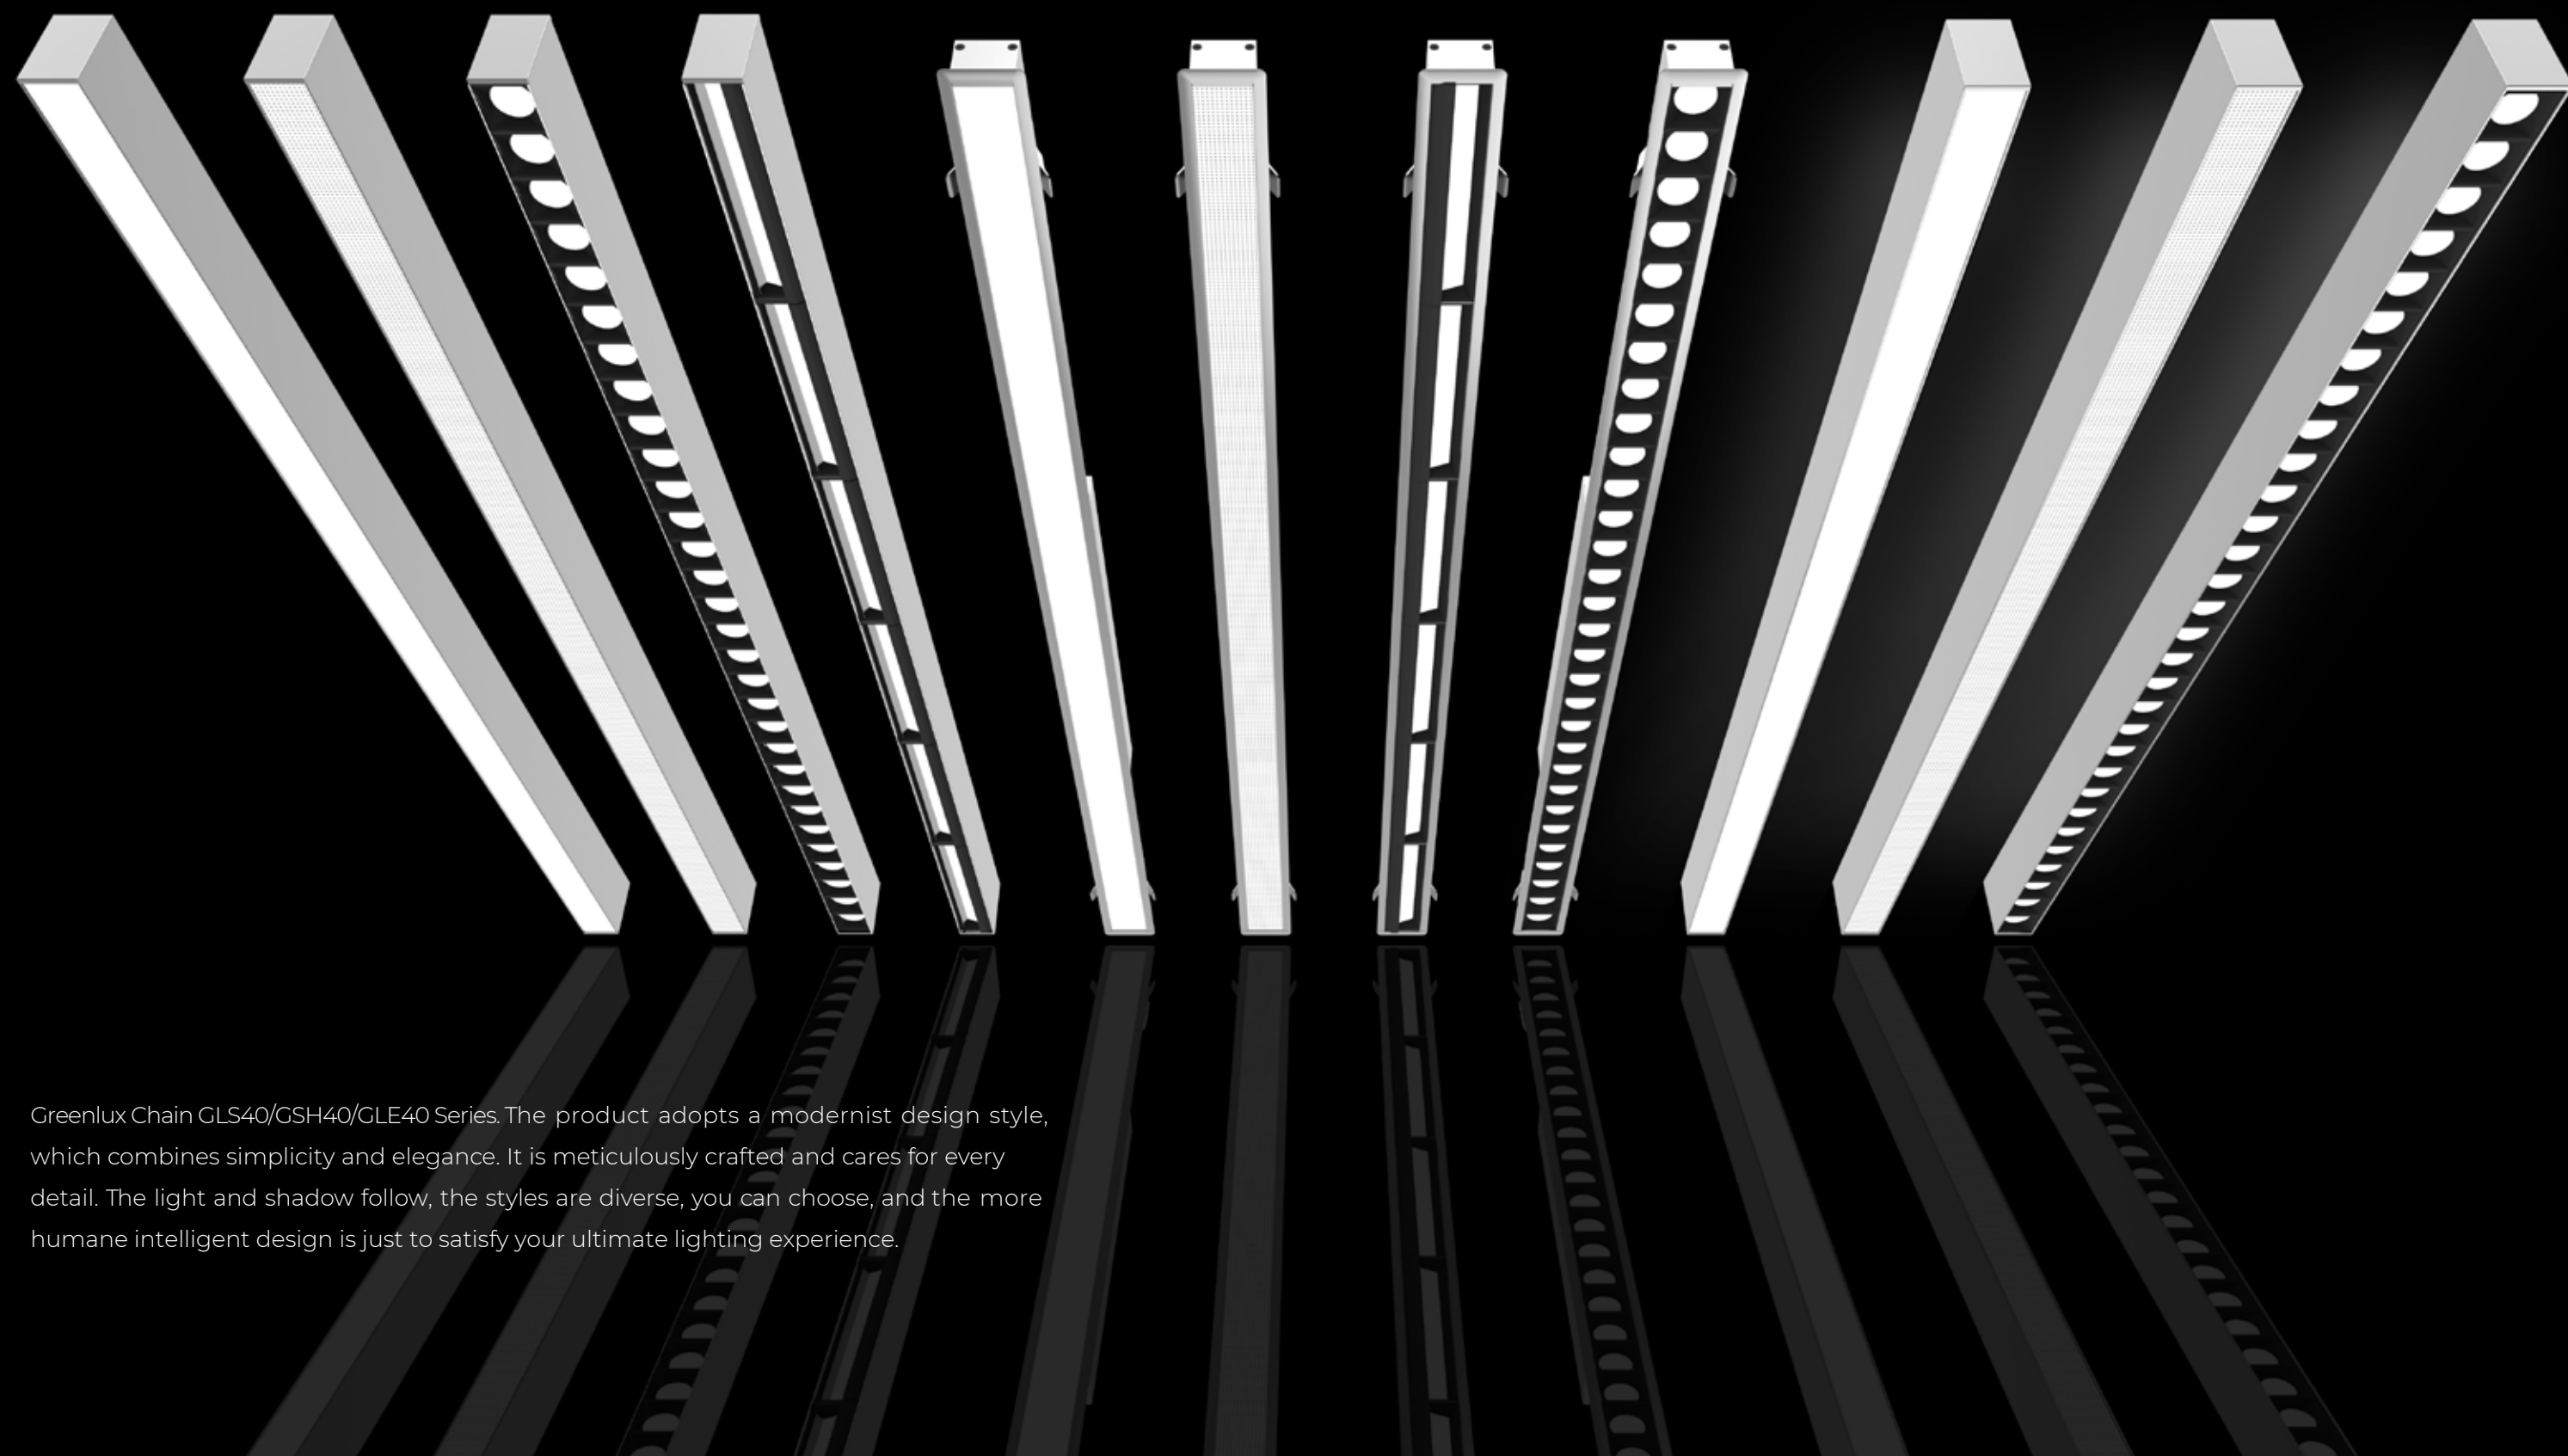

Greenlux Chain GLS40/GSH40/GLE40 Series. The product adopts a modernist design style, which combines simplicity and elegance. It is meticulously crafted and cares for every detail. The light and shadow follow, the styles are diverse, you can choose, and the more humane intelligent design is just to satisfy your ultimate lighting experience.



Light source application

Lighting method




Lighting downward



Lighting upward & downward


Lighting function

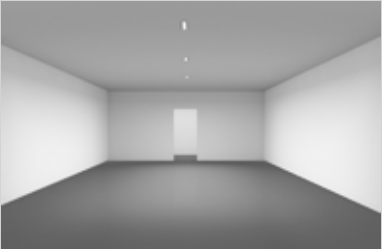

General Lighting



Accent lighting

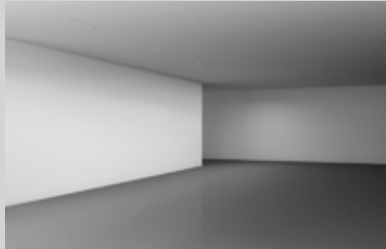


Polarizing lighting

Optics



Diffuser

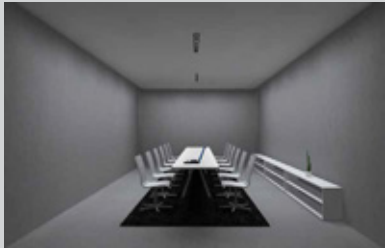

Grating



Wallwash



Prismatic Diffuse

Light and shadow follow, choose as you like

Pendant / Surface mounted


Pendant (Lighting upward & downward)

Recessed

General Lighting

Adopt High light transmittance mask and the performance is excellent. High flux and high efficiency, uniform luminous surface and high quality of light output is the best choice to provide efficient illumination in the public space.

GLS40

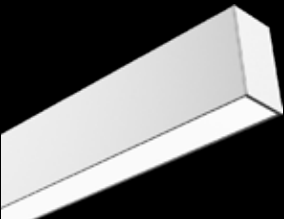


Diffuser



Prismatic Diffuse



GLH40

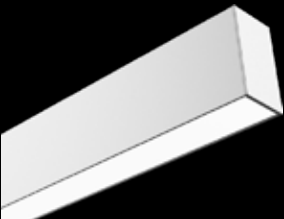

Diffuser



Prismatic Diffuse



GLE40



Diffuser




Prismatic Diffuse



Accent lighting

Adopt ultra anti-glare design, shielding angle >30°, UGR<13, provide "eye-friendly" lighting, suitable for video conference rooms, and can also be used for high-space lighting and accent lighting.

GLS40G

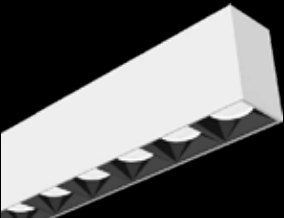

Grating




12°

24°

38°

50°

GLH40G

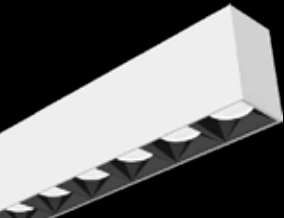

Grating




12°

24°

38°

50°

GLE40G

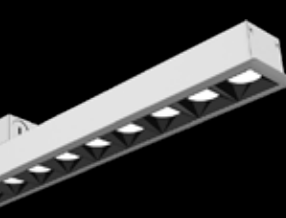

Grating



12°

24°


38°

50°

Polarising lighting

Asymmetric optical design, with excellent light uniformity in the vertical lighting direction, suitable for metope lighting and shelf lighting, can be applied in museum, library, retail or reception area.


GLS40GW

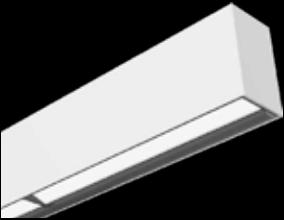

Wallwash



GLE40GW

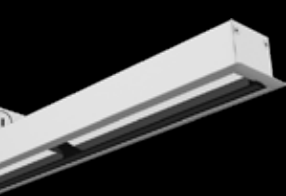

Wallwash



Installation

Pendant



Pendant (Lighting upward&downward)



Surface mounted



Recessed



Diffuser & Prismatic Diffuse luminaire


Adopt High light transmittance mask, and the performance is excellent. High flux and high efficiency, uniform luminous surface and high quality of light output, is the best choice to provide efficient illumination in the public space.



Diffuser
110°




Prismatic Diffuse
90°

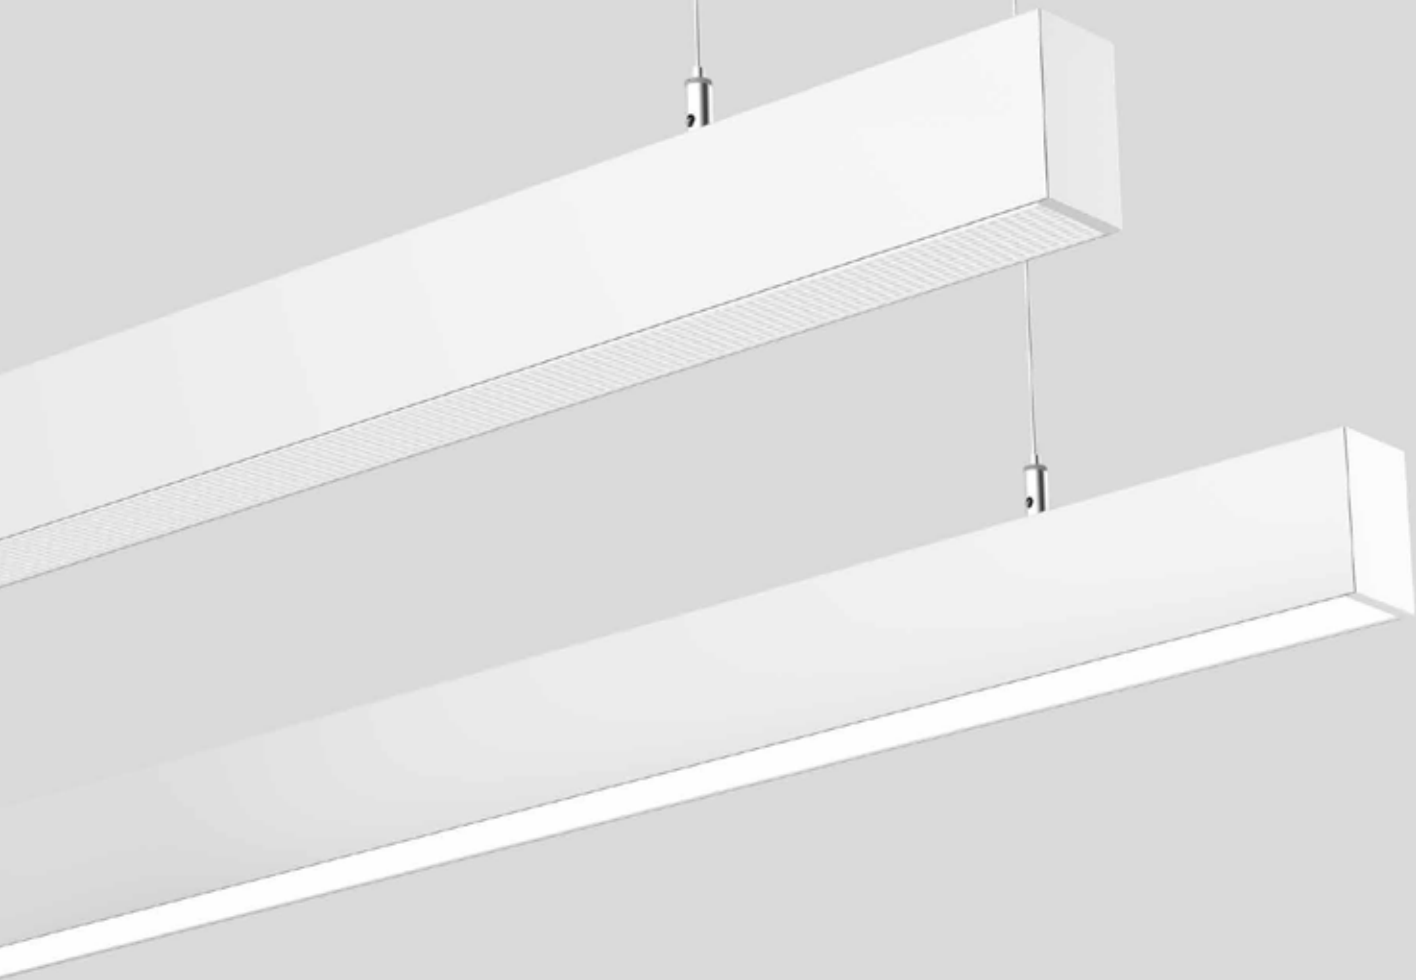


Grating luminaire

Adopt ultra anti-glare design, shielding angle>30°, UGR<13, provide “eye-friendly”lighting, suitable for video conference rooms, and can also be used for high-space lighting and accent lighting.

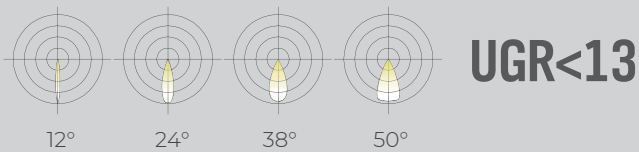


Polarising luminaire

Asymmetric optical design, with excellent light uniformity in the vertical lighting direction, suitable for metope lighting and shelf lighting, can be applied in museum, library, retail or reception area.



100°x 70° (Asymmetric: 20°)

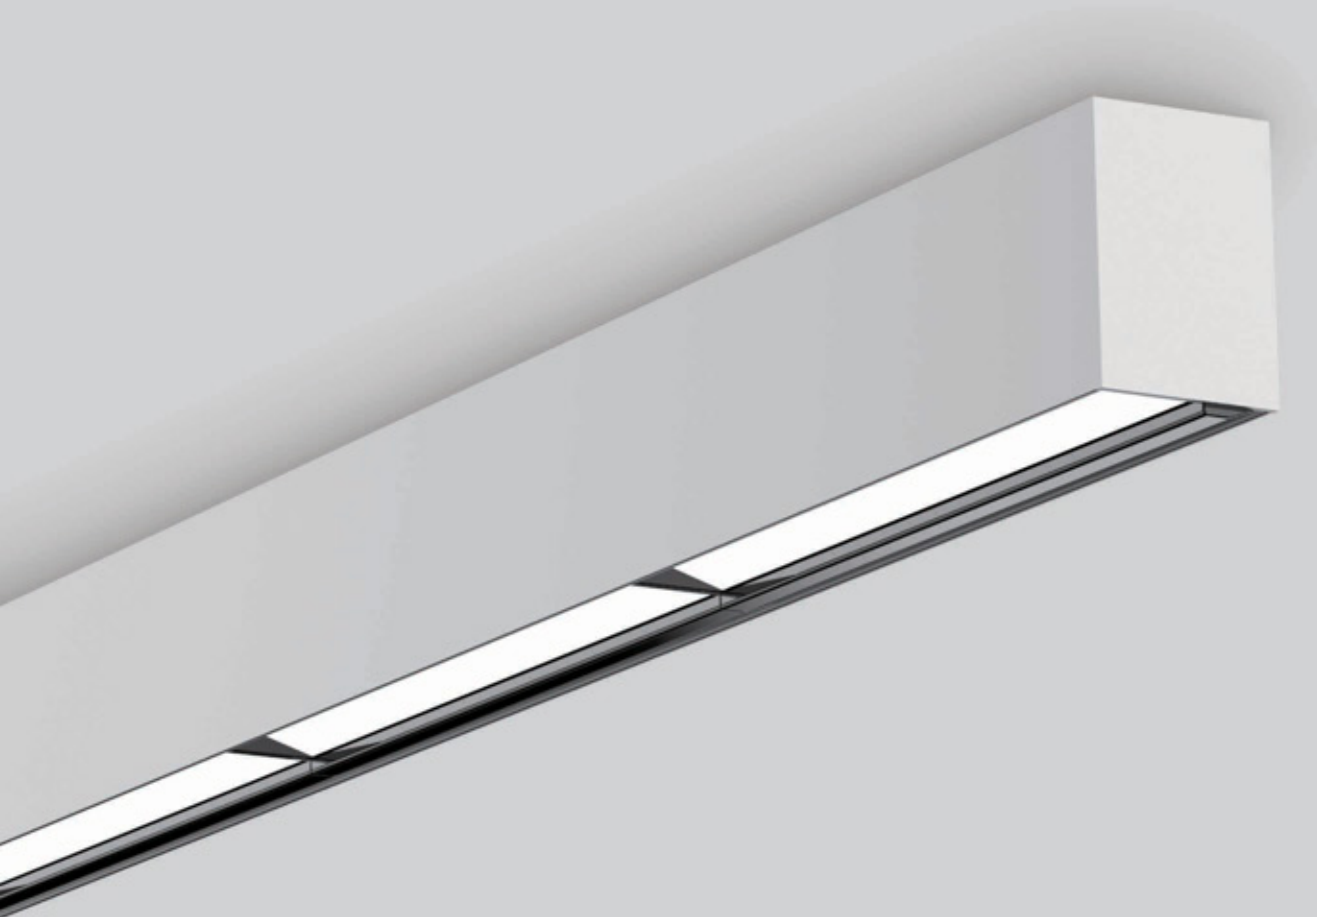


Lighting upward & downward

Upward and downward lighting provides high-quality indirect lighting. The downward lighting with great lighting effect provides excellent basic lighting; The upward lighting with large luminous surface can evenly illuminate the ceiling, making the light environment more transparent and avoiding depression in the space.



Design concept

Nature- Lighting

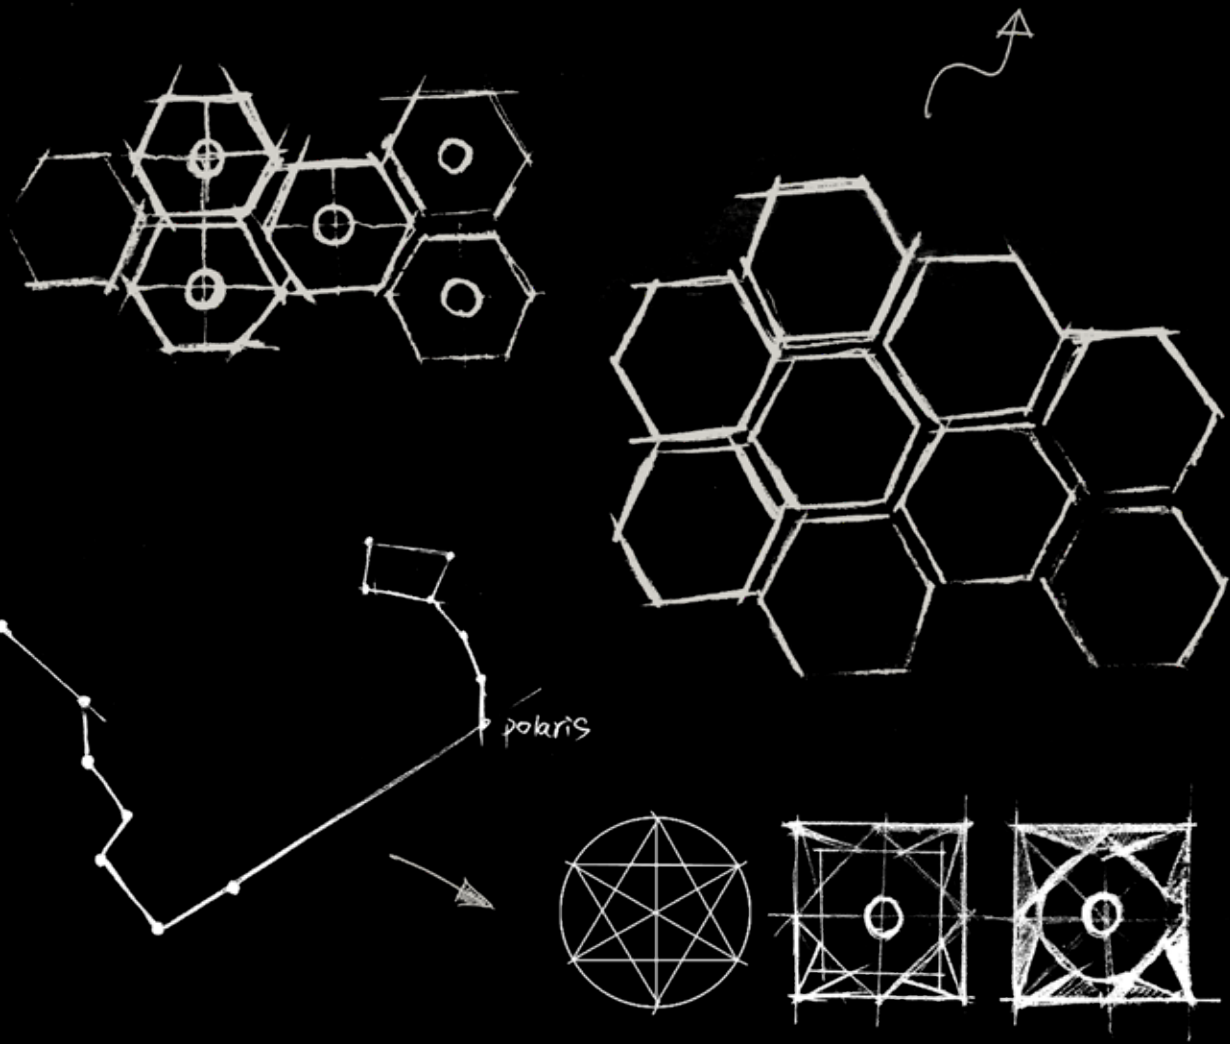

Greenlux Features
Quintet Optical System

Brand new concept, brand new technology

220VAC track lighting system equipped with the Quintet optical system creatively designed by Greenlux, break through the design method of traditional optical system, then adopt the brand new concept and technology, closely combine the nature, architecture and lighting. At the same time of featuring an elegant appearance, it can also achieve various optical functions such as spotlighting, floodlighting and wall-washing, to meet the requirements of indoor funtional lighting, and provide professional linear lighting solution for office, residential, commercial and industrial fields.





Dark effect, extremes UGR diffuser

The Dark effect technology can ensure the reflection effect of the light source, and also prevent the secondary optics from producing the third glare, When light output, effectively eliminate the visual pollution caused by ceiling.


Selection of light, craftsmanship

- International brand LEDs BRIDGELUX
- Authoritative certification of LM80, CE, CB, 5 years warranty;
- Made of metal material, after careful polishing,
the simplicity exudes a sense of luxury

CE CB LM-80 5 years SAA

CRI 90 UGR<19 UGR<13



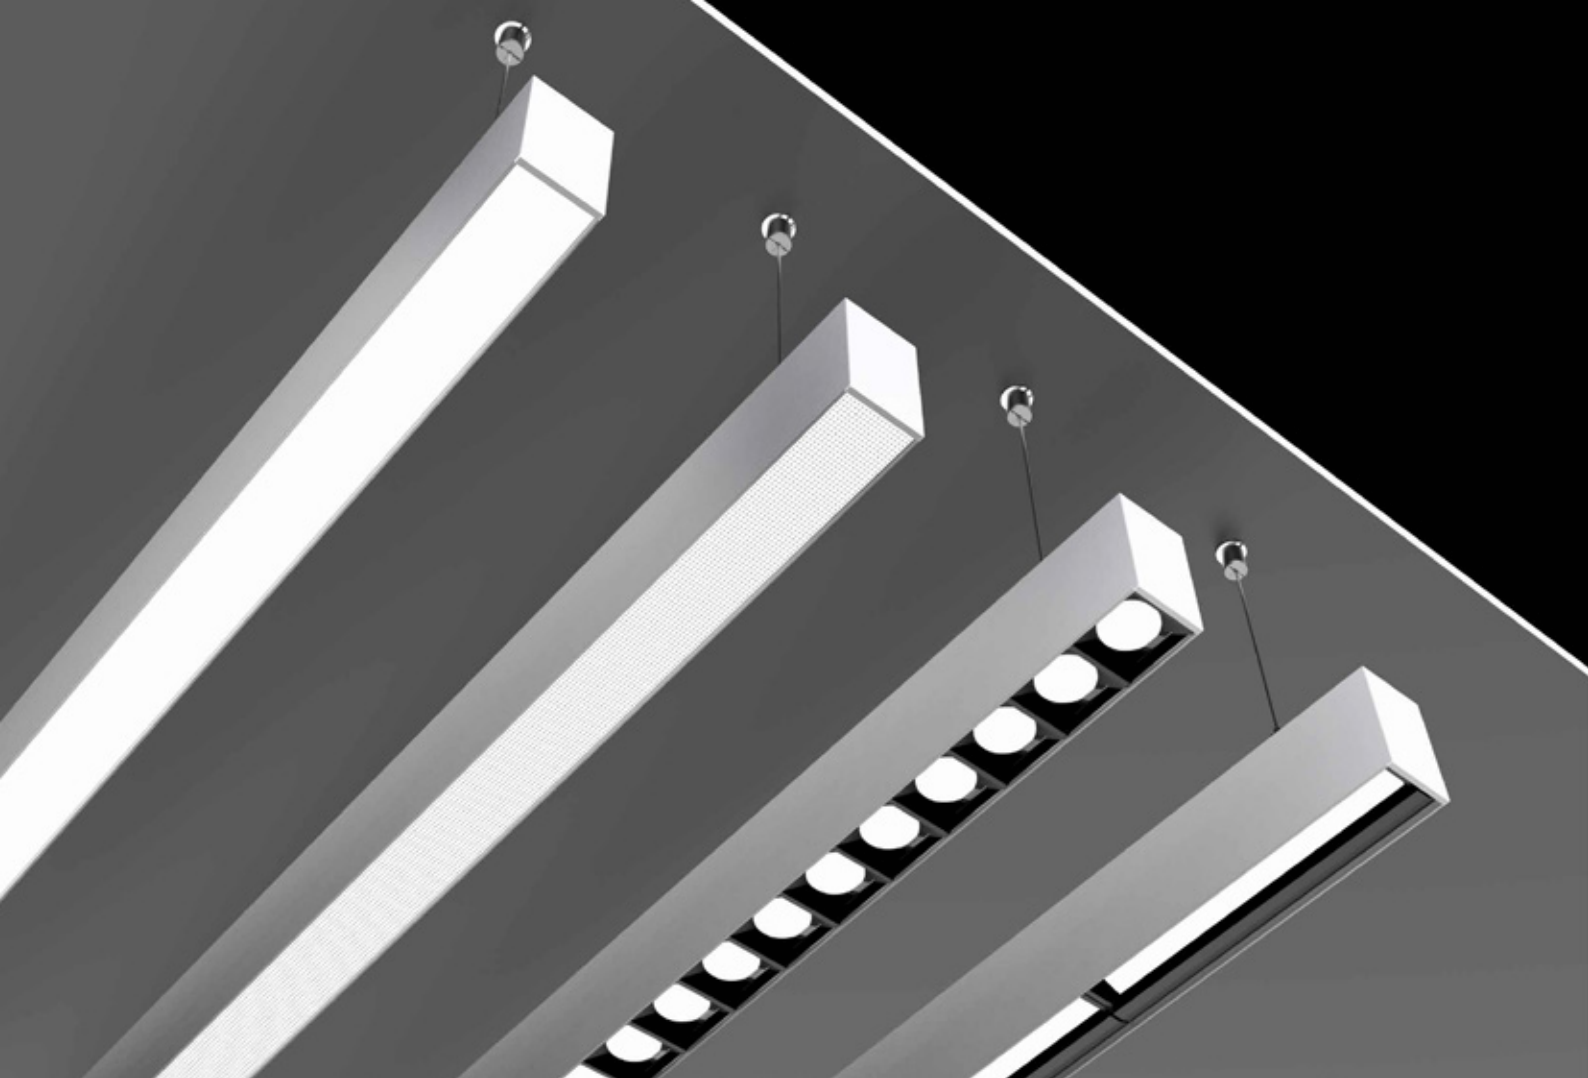




GLS40 Series

Pendant Series

GLS40 series, the latest high cost-effective main lighting product, it adopts modernist design style, simple and fashionable; delicate craftsmanship, ingenious tailoring, showing a super texture; freely adjustable installation height, safe and stable, good light efficiency, exquisite and durable Good heat dissipation.


GLS40FD

- Bridgelux LED SMD, LM80, Life>50000H
- Support 0-10V/DALI dimming
- Surface mounted, Pendant, installation optional
- Black, white and silver are available

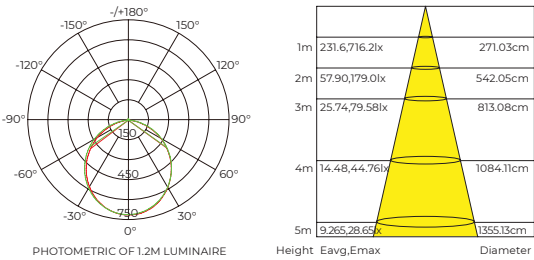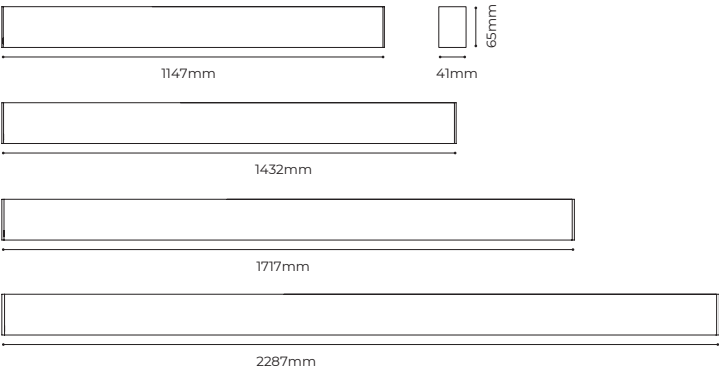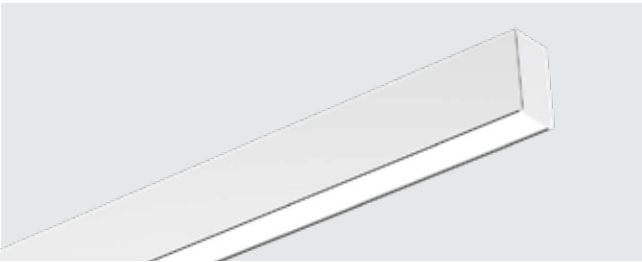

Luminaire Parameters				
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm
Optical	Diffuser			
Cover material	PC			
Lumens	4300LM	5380LM	6450LM	8600LM
Power	38W	48W	56W	76W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	110°			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power supply	Built-in Isolation			
Dimming	0-10V/DALI			
Colour	Silver  White  Black 			
Installation	Pendant/Surface mounted			
Warranty	5 years			
Certification	CE, SAA			

Installation Accessories		
Pendant cable (with junction box)	GCPY-DSA2/PY-DSA4	
Pendant cable	GCPN-DA2/PN-DA4	
Pendant rod	GCPG-IA2	
Hoisting clip	GCCL-08	


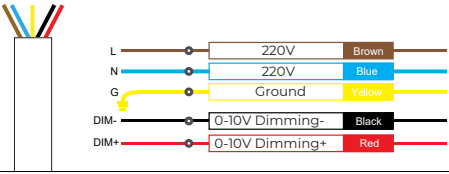


Ordering Code

Model Number		Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Type Power of Luminaire		CCT		CRI		Power Type		-	
Chain GLS40FD Opal Diffuse Surface Mounted/Suspended LED Linear Luminaire		-	Pendant	LS	40 Series	40	Flat	F	Diffuser	D	No	X	White	W	Standard End Cap	S	1200mm	-	Constant Current Rigid	T	38W	38	3000K	VW	>80	8	0-10V	B	-
													Black	B		1500mm		48W		48	3500K	PW		DALI	A				
																1800mm		56W		56	4000K	NW							
																2300mm		76W		76									
GLS		-		LS		40		F		D		X		W		S	1200	-		T		38		NW		8		B	-


GLS40FP

- Bridgelux LED SMD, LM80, Life>50000H
- Support 0-10V/DALI dimming
- Surface mounted, Pendant, installation optional
- Black, white and silver are available
- Prismatic Diffuse design

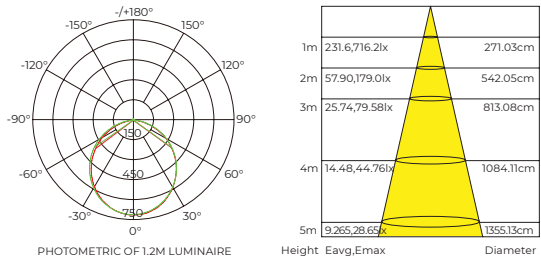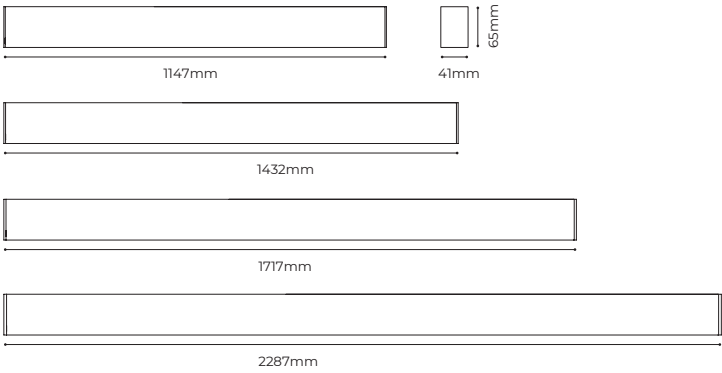

Luminaire Parameters				
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm
Optical	Prismatic Diffuse			
Cover material	PC			
Lumens	3950LM	4940LM	5930LM	7900LM
Power	38W	48W	56W	76W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	90°			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power supply	Built-in Isolation			
Dimming	0-10V/DALI			
Colour	Silver  White  Black 			
Installation	Pendant/Surface mounted			
Warranty	5 years			
Certification	CE, SAA			

Installation Accessories	
Pendant cable (with junction box)	GCPY-DSA2/PY-DSA4 
Pendant cable	GCPN-DA2/PN-DA4 
Pendant rod	GCPG-IA2 
Hoisting clip	GCCL-08 


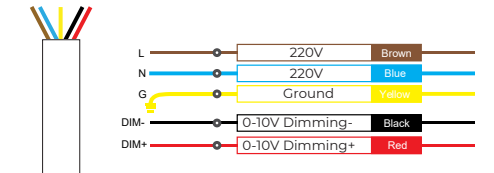


Ordering Code

Model Number	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Light Source Type	Type Power of Luminaire	CCT	CRI	Power Type												
Chain GLS40FP Prismatic Diffuse Surface Mounted/Suspended LED Linear Luminaire	- Pendant	LS	40 Series	40	Flat	F	Prismatic Diffuse	P	No	X	White	W	Standard End Cap	S	1200mm	Constant Current Rigid	T	38W	38	3000K	VW	>80	8	0-10V	B
CCCHA-GLS40FP-38W-1200											Black	B			1500mm			48W	48	3500K	PW			DALI	A
CCCHA-GLS40FP-48W-1500											Silver	S			1800mm			56W	56	4000K	NW				
CCCHA-GLS40FP-56W-1800															2300mm			76W	76						
CCCHA-GLS40FP-76W-2300																									
GLS	-	LS		40		F		P		X		W		S	1200	-	T		38		NW		8		B


GLS40G

- 12° /24° /38° /50° multiple optical design, more applications
- Ultra anti-glare design UGR<13
- Bridgelux LED SMD, LM80, Lifespan>50000H
- Support 0-10V/DALI dimming
- Black, white and silver are available

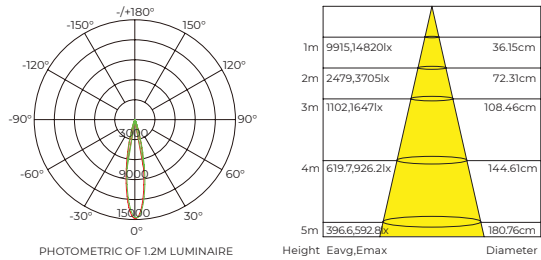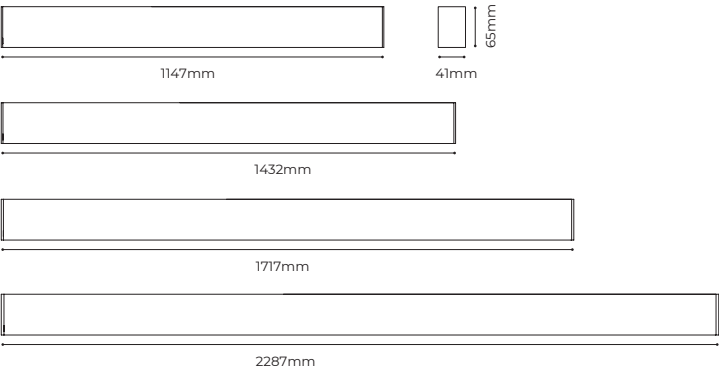

Luminaire Parameters				
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm
Optical	Grating			
Cover material	PC			
Lumens	3060LM	3830LM	4590LM	6120LM
Power	36W	43W	54W	68W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	12° /24° /38° /50°			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power supply	Built-in Isolation			
Dimming	0-10V/DALI			
Colour	Silver  White  Black 			
Installation	Pendant/Surface mounted			
Warranty	5 years			
Certification	CE, SAA			

Installation Accessories	
Pendant cable (with junction box)	GCPY-DSA2/PY-DSA4 
Pendant cable	GCPN-DA2/PN-DA4 
Pendant rod	GCPG-IA2 
Hoisting clip	GCCL-08 


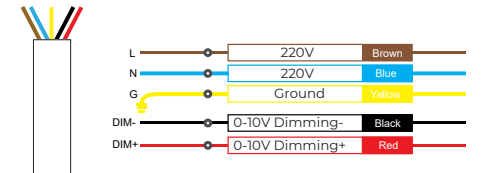


Ordering Code

Model Number	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Light Source Type	Type Power of Luminaire	CCT	CRI	Power Type											
Chain GLS40G Grating Surface Mounted/Suspended LED Linear Luminaire	Pendant	LS	40 Series	40	Grating	G	12°	E	No	X	White	W	Standard End Cap	S	1200mm	Constant Current Rigid	36W	36	3000K	WW	>80	8	0-10V	B
							24°	F			Black	B		1500mm	43W		43	3500K	PW		DALI	A		
							38°	G			Silver	S		1800mm	54W		54	4000K	NW					
							50°	H					2300mm	68W	68									
GLS	-	LS	40	G	H	X	W	S	1200	-	T	36	WW	8	B									


GLS40GW

- Asymmetric 20°, Uniform wall-washing lighting
- Bridgelux LED SMD, LM80, Life>50000H
- Support 0-10V/DALI dimming
- Support Surface mounted, Pendant installation
- Black, white and silver are available

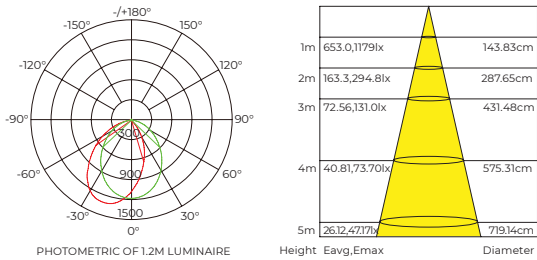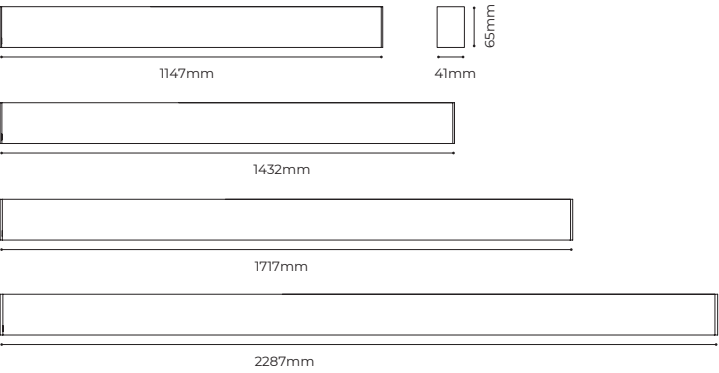


Luminaire Parameters				
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm
Optical	Wallwash			
Cover material	PC			
Lumens	2200LM	2750LM	3300LM	4400LM
Power	36W	43W	54W	68W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	100° x70° (Asymmetric : 20°)			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power supply	Built-in Isolation			
Dimming	0-10V/DALI			
Colour	Silver White Black			
Installation	Pendant/Surface mounted			
Warranty	5 years			
Certification	CE, SAA			

Installation Accessories	
Pendant cable (with junction box)	GCPY-DSA2/PY-DSA4
Pendant cable	GCPN-DA2/PN-DA4
Pendant rod	GCPG-IA2
Hoisting clip	GCCL-08

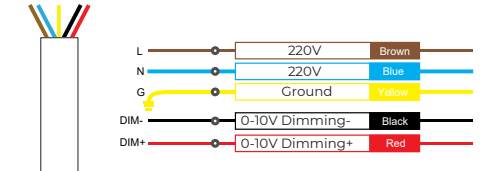

Ordering Code

Model Number		Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style	Length	Light Source Type		Type Power of Luminaire		CCT		CRI		Power Type		-			
Chain GLS40GW Wall Washer Surface Mounted/Suspended LED Linear Luminaire GCCHA-GLS40GW-38W-1200 GCCHA-GLS40GW-43W-1500 GCCHA-GLS40GW-54W-1800 GCCHA-GLS40GW-68W-2300		Pendant	LS	40 Series	40	Grating	G	Wallwash	W	No	X	White	W	Standard End Cap	S	1200mm	Constant Current Rigid	T	36W	36	3000K	WW	>80	8	0-10V	B	-	
												Black	B	1500mm	43W	43		3500K	PW		DALI	A						
												Silver	S	1800mm	54W	54		4000K	NW									
														2300mm	68W	68												
CLS		-		LS	40		G		W		X		W		S	1200	-		T		36		NW		8		B	-

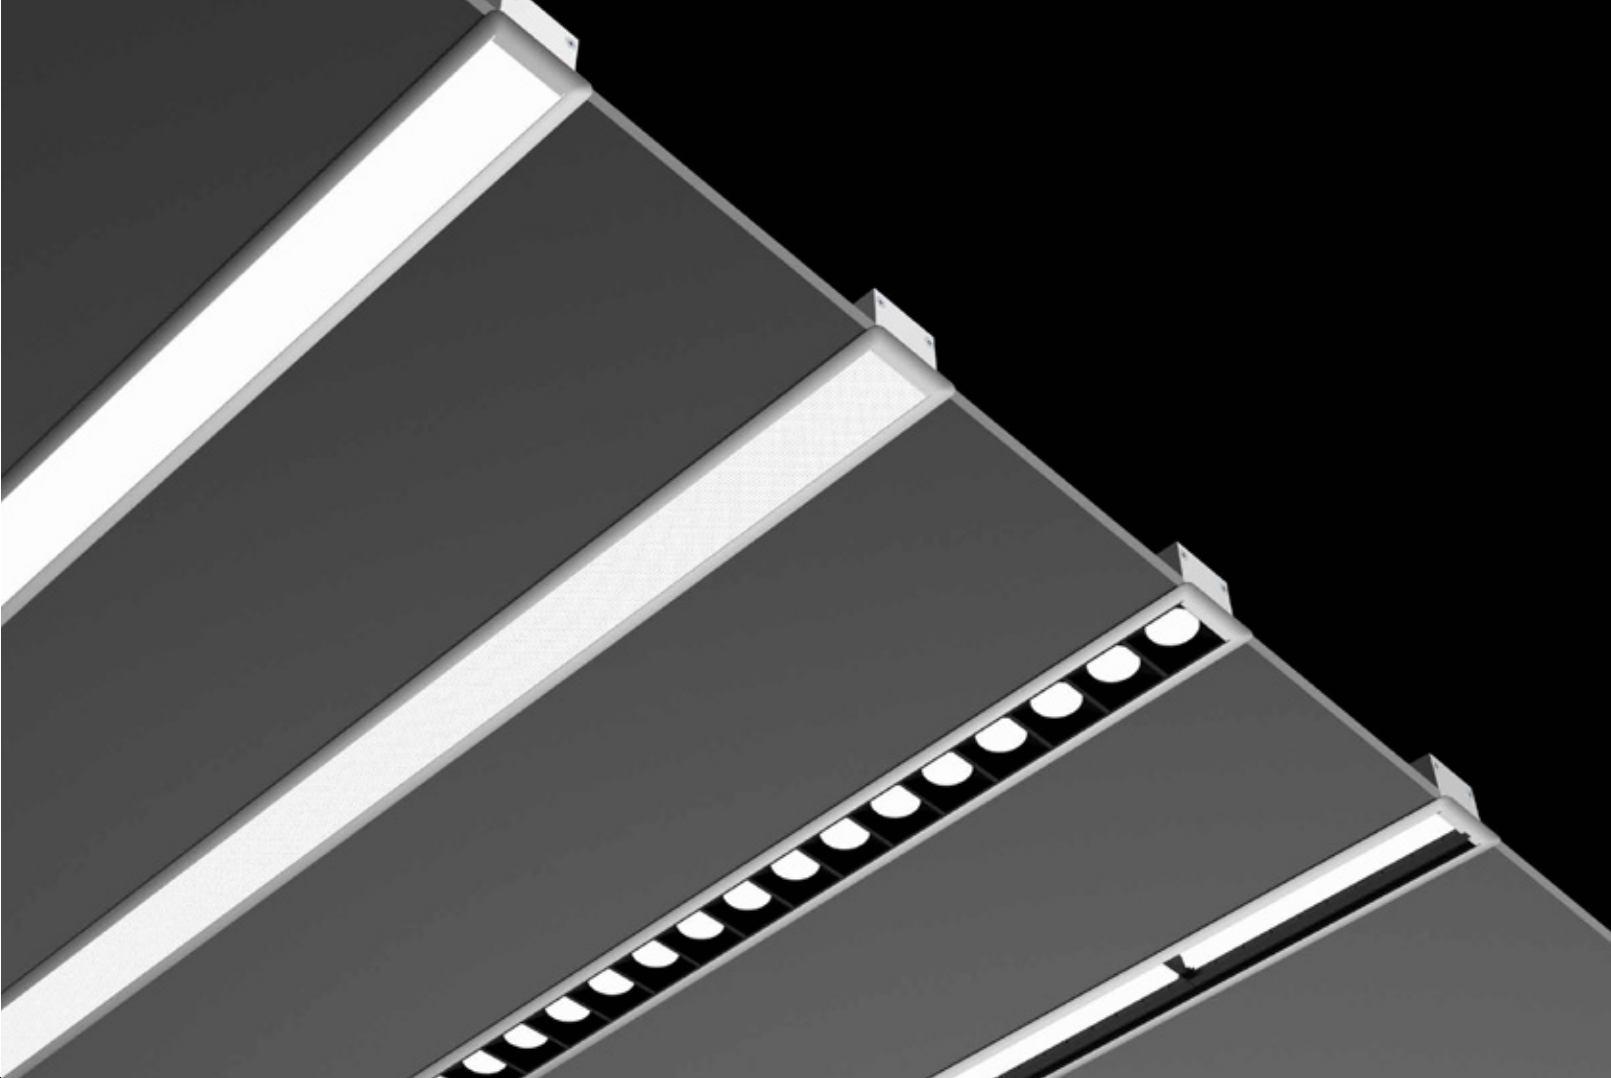




GLE40 Series

Recessed Series

The GLE40 Series adopts embedded installation method and flexible adjustment. The black light technology guarantees the reflection effect of the light source, eliminates the visual pollution caused by the glare of the ceiling lamp, realizes the ultimate anti-glare, key lighting, sees the light without seeing the light, and interprets the light and shadow art space.

GLE40FD

- AL6063-T5 aluminum profile with high-quality surface treatment
- LM80 certified light source, life > 50000h
- Built-in efficient and safe flicker-free dimming power supply
- Support 0-10V/DALI dimming

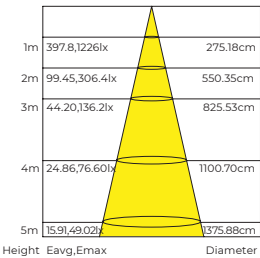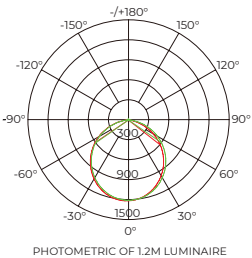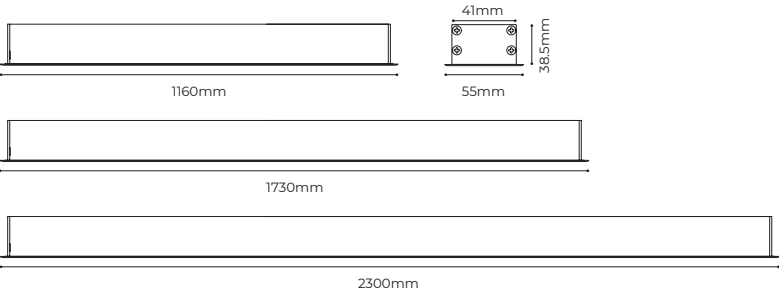





Luminaire Parameters				
Size	1160*55*38.5mm	1445*55*38.5mm	1730*55*38.5mm	2300*55*38.5mm
Optical	Diffuser			
Cover material	PC			
Lumens	4300LM	5380LM	6450LM	8600LM
Power	38W	48W	56W	76W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	110°			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power supply	External Isolation			
Dimming	0-10V/DALI			
Colour	Silver  White  Black 			
Installation	Recessed			
Warranty	5 years			
Certification	CE, CB, SAA			

Ordering Code

Model Number		Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		Light Source Type		Type Power of Luminaire		CCT		CRI		Power Type							
Chain GLE40FD Recessed Opal Diffuser LED Linear Luminaire		-	Recessed	LE	40	Series	40	Flat	F	Diffuser	D	No	X	White	W	Standard End Cap	S	1200mm	-	Constant Current Rigid	T	38W	38	3000K	WW	>80	8	0-10V	B	-			
														Black	B		1500mm	48W			48	3500K	PW	DALI	A								
														Silver	S		1800mm	56W			56	4000K	NW										
														2300mm	76W		76																
CLS		-		LE	40			F			D		X	W		S	1200	-		T	38		WW	8		B	-						

GLE40FP

- AL6063-T5 aluminum profile with high-quality surface treatment
- LM80 certified light source, life > 50000h
- Built-in efficient and safe flicker-free dimming power supply
- Support 0-10V/DALI dimming
- Prismatic Diffuse design

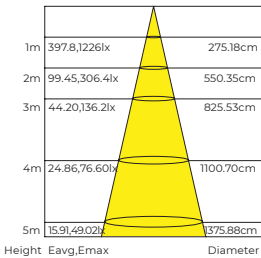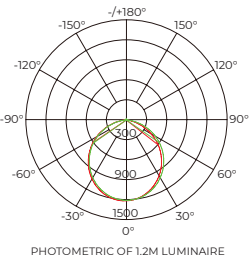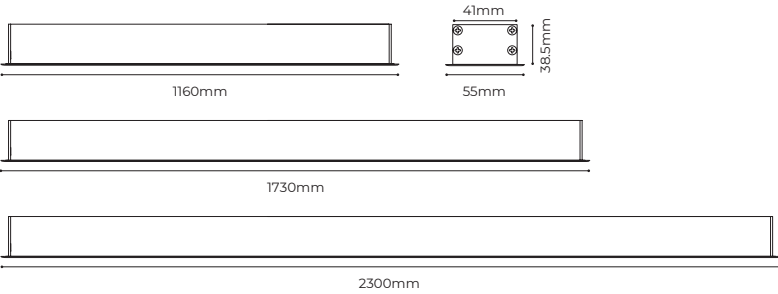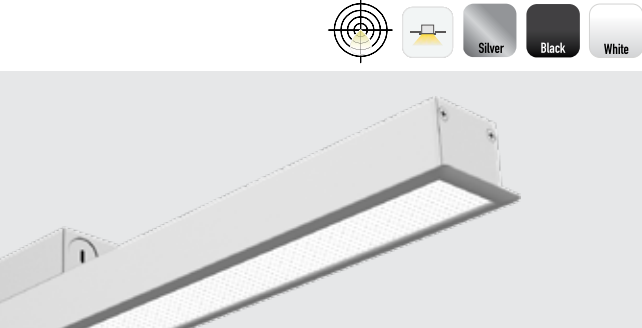




Luminaire Parameters				
Size	1160*55*38.5mm	1445*55*38.5mm	1730*55*38.5mm	2300*55*38.5mm
Optical	Prismatic Diffuse			
Cover material	PC			
Lumens	3950LM	4940LM	5930LM	7900LM
Power	38W	48W	56W	76W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	90°			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power supply	External Isolation			
Dimming	0-10V/DALI			
Colour	Silver  White  Black 			
Installation	Recessed			
Warranty	5 years			
Certification	CE, CB, SAA			

Ordering Code

Model Number		Series	Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style	Length	Light Source Type	Type Power of Luminaire		CCT	CRI		Power Type					
Chain GLE40FP Recessed Prismatic Diffuse LED Linear Luminaire		Recessed	LE	40 Series	40	Flat	F	Prismatic Diffuse	P	No	X	White	W	Standard End Cap	S	1200mm	Constant Current Rigid	T	38W	38	3000K	WW	>80	8	0-10V	B
												Black	B	1500mm	48W	48		3500K	PW		DALI	A				
												Silver	S	1800mm	56W	56		4000K	NW							
														2300mm	76W	76										
CLS		-	LE	40		F		P		X		W	S	1200	-	T	38		WW		8		B	-		

GLE40G

- AL6063-T5 aluminum profile with high-quality surface treatment
- LM80 certified light source, life > 50000h
- Built-in efficient and safe flicker-free dimming power supply
- Support 0-10V/DALI dimming
- 12° /24° /38° /50° multiple optical design, more application

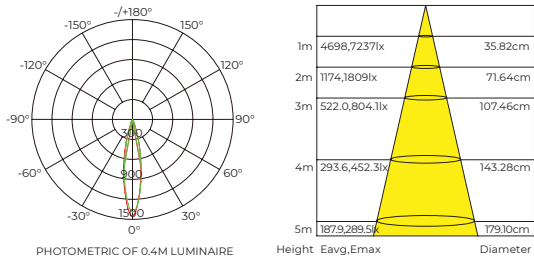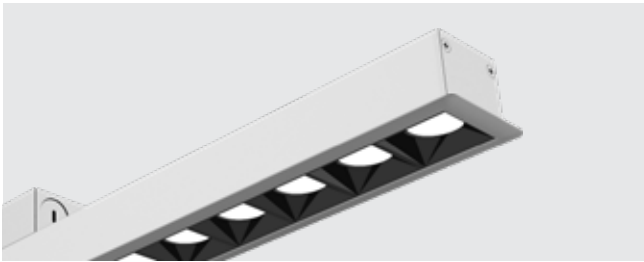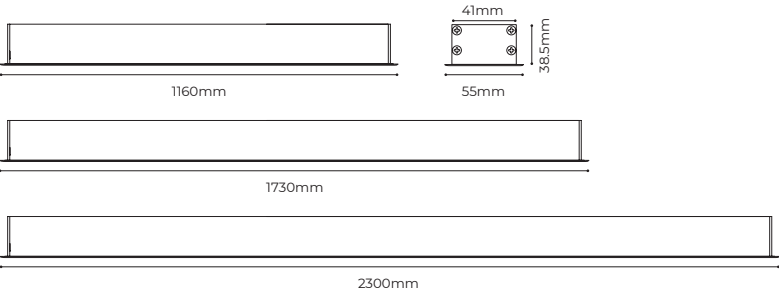




Luminaire Parameters						
Size	L210*W55*H38.5mm	L400*W55*H38.5mm	L1160*W55*H38.5mm	L1540*W55*H38.5mm	L1730*W55*H38.5mm	L2300*W55*H38.5mm
Optical	Grating					
Cover material	PC					
Lumens	700LM	1400LM	3060LM	3830LM	4590LM	6120LM
Power	10W	18W	36W	45W	54W	72W
CCT	3000K/3500K/4000K					
CRI	>80(90 optional)					
Beam angle	12° /24° /38° /50°					
Input voltage	200-240VAC 50Hz/60Hz					
Power factor	>0.9					
Power supply	External Isolation					
Dimming	0-10V/DALI					
Colour	Silver White Black					
Installation	Recessed					
Warranty	5 years					
Certification	CE, CB, SAA					

Ordering Code

Model Number				Series		Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	-	Light Source Type		Type Power of Luminaire		CCT		CRI		Power Type		-	
Chain GLE40G Recessed Grating LED Linear Luminaire GCCHA-GLE40G-10W-200 GCCHA-GLE40G-18W-400 GCCHA-GLE40G-36W-1200 GCCHA-GLE40G-45W-1500 GCCHA-GLE40G-54W-1800 GCCHA-GLE40G-72W-2300				-	Recessed	LE	40 Series	40	Grating	G	12°	E	No	X	White	W	Standard End Cap	S	200mm	-	Constant Current Rigid	T	10W	10	3000K	WW	>80	8	0-10V	B	-
											24°	F			Black	B			400mm						18W	18	3500K	PW			
											38°	G			Silver	S			1200mm						36W	36	4000K	NW			
											50°	H							1500mm					45W	45						
																			1800mm					54W	54						
																			2300mm					72W	72						
											GLS				-		LE		40				G		F		X		W	S	1200

GLE40GW

- AL6063-T5 aluminum profile with high-quality surface treatment
- LM80 certified light source, life > 50000h
- Built-in efficient and safe flicker-free dimming power supply
- Support 0-10V/DALI dimming
- Wall Wash lighting, high quality facade lighting effect

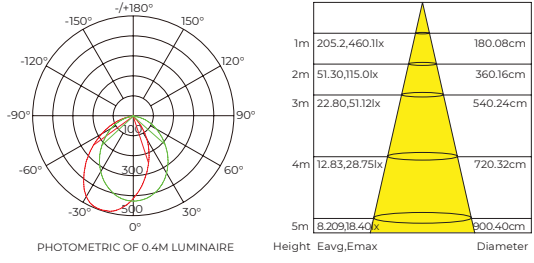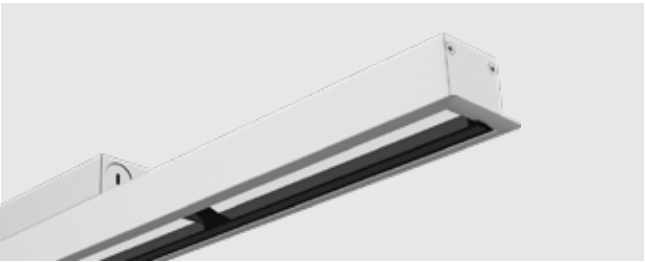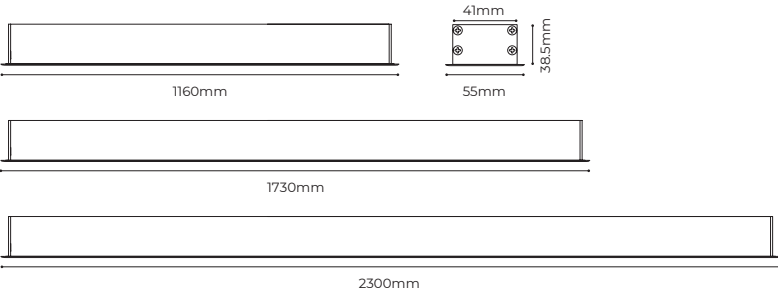

Luminaire Parameters						
Size	L210*W55*H38.5mm	L400*W55*H38.5mm	L1160*W55*H38.5mm	L1540*W55*H38.5mm	L1730*W55*H38.5mm	L2300*W55*H38.5mm
Optical	Wallwash					
Cover material	PC					
Lumens	500LM	1000LM	2200LM	2750LM	3300LM	4400LM
Power	10W	18W	36W	45W	54W	72W
CCT	3000K/3500K/4000K					
CRI	>80(90 optional)					
Beam angle	100° x70° (Asymmetric : 20°)					
Input voltage	200-240VAC 50Hz/60Hz					
Power factor	>0.9					
Power supply	External Isolation					
Dimming	0-10V/DALI					
Colour	Silver White Black					
Installation	Recessed					
Warranty	5 years					
Certification	CE, CB, SAA					

Ordering Code

Model Number	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Light Source Type	Type Power of Luminaire	CCT	CRI	Power Type
Chain GLE40GW Recessed Wall Washer LED Linear Luminaire	Recessed	LE 40 Series 40	Grating F	Wall Wash W	No	X White W	Standard End Cap S	200mm	Constant Current Rigid T	10W 10	3000K WW	>80 8	0-10V B
GCCHA-GLE40GW-10W-200						Black B		400mm		18W 18	3500K PW		
GCCHA-GLE40GW-18W-400						Silver S		1200mm		36W 36	4000K NW		
GCCHA-GLE40GW-36W-1200								1500mm		45W 45			
GCCHA-GLE40GW-45W-1500								1800mm		54W 54			
GCCHA-GLE40GW-54W-1800								2300mm		72W 72			
GCCHA-GLE40GW-72W-2300													
GLS	LE	40	G	W	X	W	S	1200	T	36	NW	8	B





GLH40 Series

Upward and downward lighting luminaries


Upward and downward lighting provides high-quality indirect lighting. The downward lighting with great lighting effect provides excellent basic lighting; The upward lighting with large luminous surface can evenly illuminate the ceiling, making the light environment more transparent and avoiding depression in the space.

GLH40FD

- Bridgelux LED SMD, LM80, Life>50000H
- Support 0-10V/DALI dimming
- Pendant installation
- Three optional colours of black, white and silver
- Upward and downward lighting

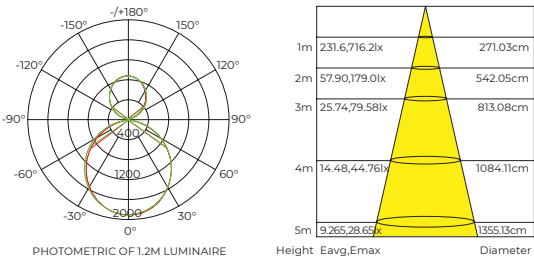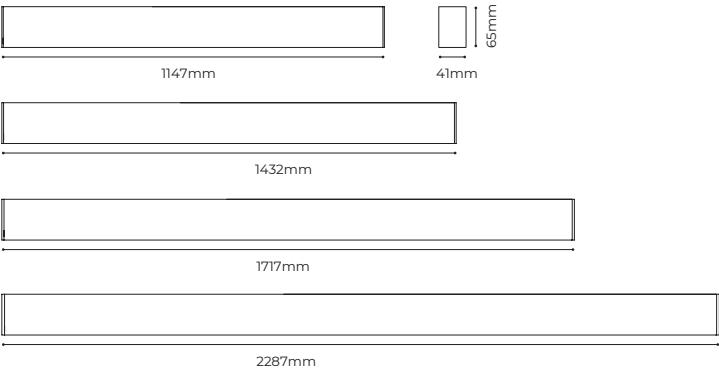

Luminaire Parameters					Installation Accessories	
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm	Pendant cable (with junction box)	GCPY-DSA2/PY-DSA4
Optical	Diffuser				Pendant cable	GCPN-DA2/PN-DA4
Cover material	PC				Pendant rod	GCPG-IA2
Lumens	(up)1400LM (down)4300LM	(up)1750LM (down)5380LM	(up)2100LM (down)6450LM	(up)2800LM (down)8600LM	Clip	GCCP-32
Power	48W	60W	72W	96W		
CCT	3000K/3500K/4000K					
CRI	>80 (90 optional)					
Beam angle	110°					
Input voltage	200-240VAC 50Hz/60Hz					
Power factor	>0.9					
Power supply	Built-in Isolation					
Dimming	0-10V/DALI					
Colour	Silver White Black					
Installation	Pendant					
Warranty	5 years					
Certification	CE, SAA					


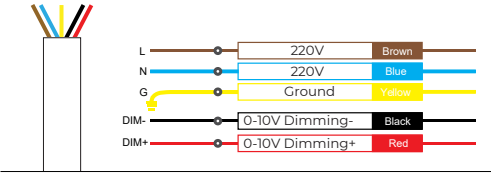


Ordering Code

Model Number	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	Light Source Type	Type Power of Luminaire	CCT	CRI	Power Type
Chain GLH40FD Opal Diffuser Up/Down Suspension LED Linear Luminaire	Pendant	LH	40 Series 40	Flat F	Diffuser D	No X	White W Black B Silver S	Standard End Cap S	1200mm 1500mm 1800mm 2300mm	48W 48 60W 60 72W 72 96W 96	3000K WW 3500K PW 4000K NW	>80 B	0-10V B DALI A
GLS		LH	40	F	D	X	W	S	1200	48	NW	B	B


GLH40FP

- Bridgelux LED SMD, LM80, Life>50000H
- Support 0-10V/DALI dimming
- Pendant installation
- Three optional colours of black, white and silver
- Upward and downward lighting
- Prismatic Diffuse design

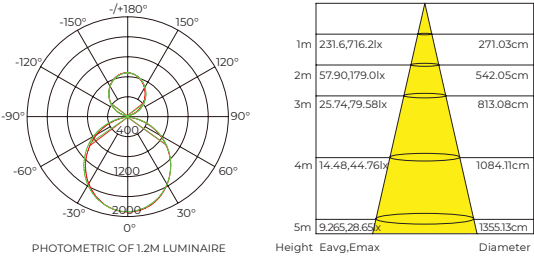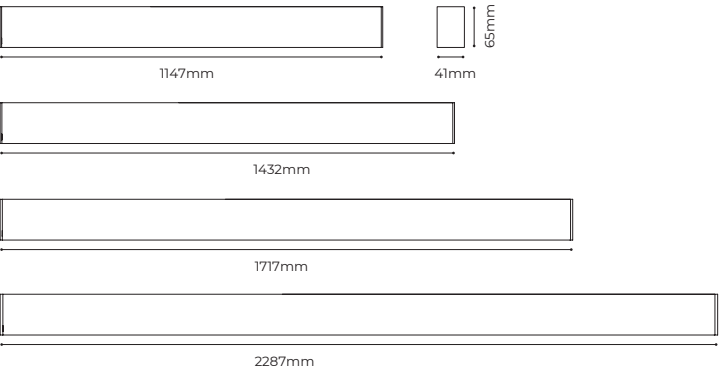

Luminaire Parameters				
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm	2287*41*65mm
Optical	Prismatic Diffuse			
Cover material	PC			
Lumens	(up)1400LM (down)3950LM	(up)175LM (down)4940LM	(up)2100LM (down)5930LM	(up)2800LM (down)7900LM
Power	48W	60W	72W	96W
CCT	3000K/3500K/4000K			
CRI	>80 (90 optional)			
Beam angle	90°			
Input voltage	200-240VAC 50Hz/60Hz			
Power factor	>0.9			
Power supply	Built-in Isolation			
Dimming	0-10V/DALI			
Colour	Silver White Black			
Installation	Pendant			
Warranty	5 years			
Certification	CE, SAA			

Installation Accessories	
Pendant cable (with junction box)	GCPY-DSA2/PY-DSA4
Pendant cable	GCPN-DA2/PN-DA4
Pendant rod	GCPG-IA2
Clip	GCCP-32



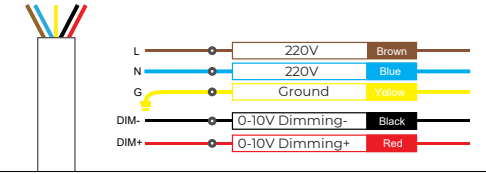


Ordering Code

Model Number	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Type Power of Luminaire	CCT	CRI	Power Type	-														
Chain GLH40FP Prismatic Diffuser Up/Down Suspension LED Linear Luminaire	-	Pendant	LH	40 Series	40	Flat	F	Prismatic Diffuse	P	No	X	White	W	Standard End Cap	S	1200mm	-	Constant Current Rigid	T	48W	48	3000K	WW	>80	8	0-10V	B	-	
												GCCHA-GLH40FP-48W-1200									60W	60	3500K	PW			DALI	A	
												GCCHA-GLH40FP-60W-1500									72W	72	4000K	NW					
												GCCHA-GLH40FP-72W-1800																	
												GCCHA-GLH40FP-96W-2300									96W	96							
GLS	-	LH	40	F	P	X	W	S	1200	-	T	38	NW	8	B	-													


GLH40G

- 12° /24° /38° /50° multiple optical design, more applications
- Ultra anti-glare design UGR<13
- Osram LED, LM80, Lifespan>50000H
- Support 0-10V/DALI dimming
- Three optional colours of black,white and silver
- Upward and downward lighting

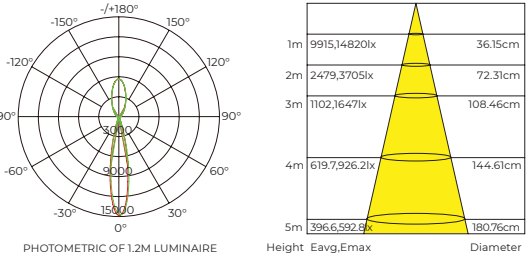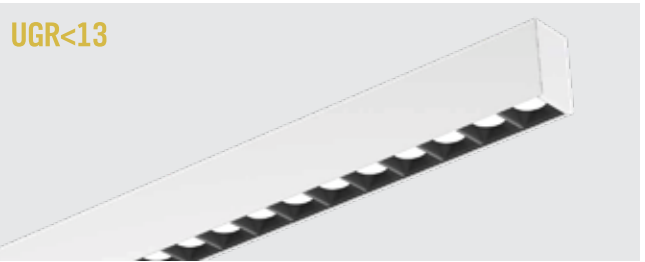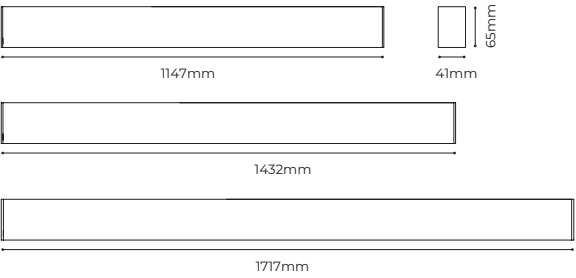

Luminaire Parameters			
Size	1147*41*65mm	1432*41*65mm	1717*41*65mm
Optical	Grating		
Cover material	PC		
Lumens	(up)1400LM (down)3060LM	(up)175LM (down)3830LM	(up)2100LM (down)4590LM
Power	47W	59W	70W
CCT	3000K/3500K/4000K		
CRI	>80 (90 optional)		
Beam angle	12° /24° /38° /50°		
Input voltage	200-240VAC 50Hz/60Hz		
Power factor	>0.9		
Power supply	Built-in Isolation		
Dimming	0-10V/DALI		
Colour	Silver White Black		
Installation	Pendant		
Warranty	5 years		
Certification	CE, SAA		

Installation Accessories	
Pendant cable (with junction box)	GCPY-DSA2/PY-DSA4
Pendant cable	GCPN-DA2/PN-DA4
Pendant rod	GCPG-IA2
Clip	GCCP-32

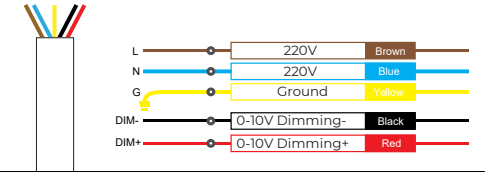

Ordering Code

Model Number	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Type Power of Luminaire	CCT	CRI	Power Type	-													
Chain GLH40FD Grating Up/Down Suspension LED Linear Luminaire	-	Pendant	LH	40 Series	40	Grating	G	12"	E	No	X	White	W	Standard End Cap	S	1200mm	-	Constant Current Rigid	T	47W	47	3000K	WW	>80	8	0-10V	B	-
								24"	F			Black	B		1500mm		59W			59	3500K	PW		DALI	A			
								38"	G			Silver	S		1800mm		70W			70	4000K	NW						
								50"	H																			
CLS	-		LH		40		G		H		X		W		S	1200	-		T		47		WW		8		B	-



Greenlux Lighting

37 Chelmsford Street,
Williamstown North VIC 3016 Australia

Ph: 1300 650 625 or +61 3 8560 2895

Email: enquiries@greenlux.com.au

Website: www.greenlux.com.au