



Chain GAH5060 D3000 Up/Down

LED Curve & Round Linear Lighting System



Features


- Lighting direction : Lighting upward and downward
- Various installation ways: pendant, surface mounted
- Specially designed light source with diffusers producing homogeneous and soft lighting
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver

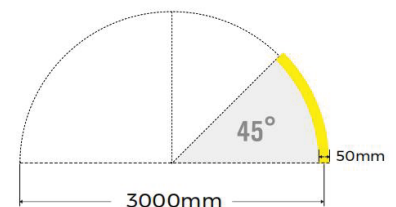






Chain GAH5060 D3000 Up/Down

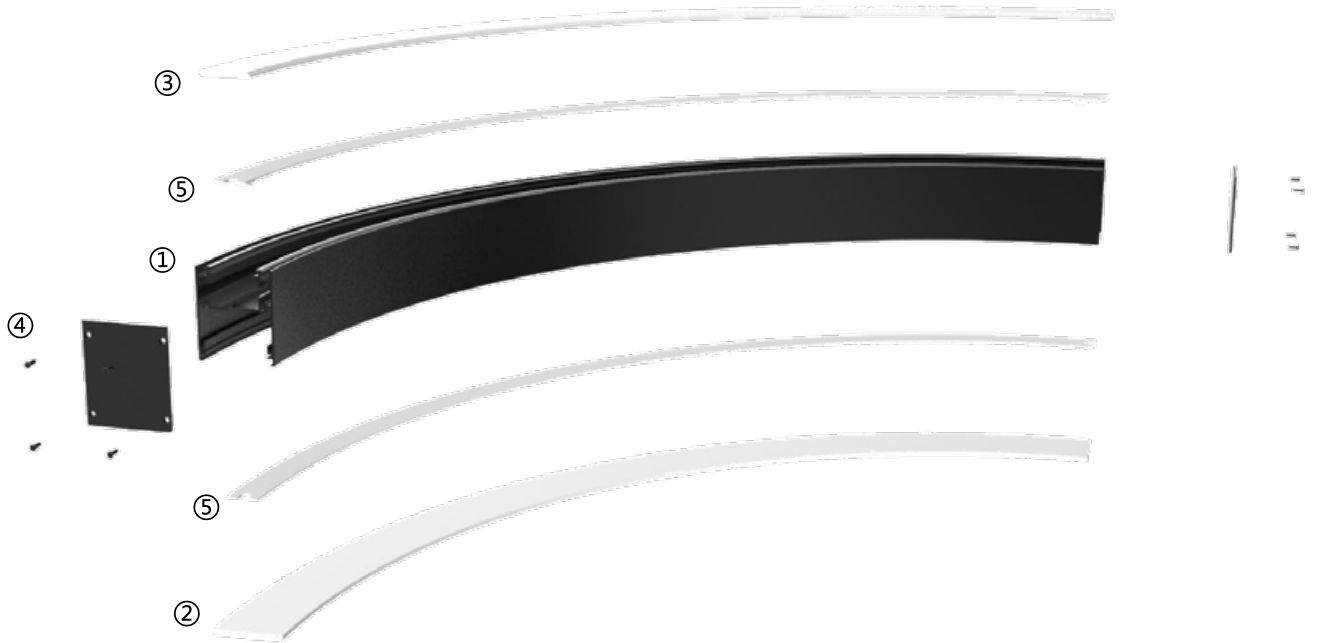LED Curve & Round Linear Lighting System

Details







Optional Accessories

| Picture | Item | Parameter |
|---|---|---|
|  | ①Profile | Profile weight : 1.38kg / D3000mm , 45° Size : 50x60mm , D3000mm , 45 Material : AL6063-T5 Surface processing: Spray |
|  | ②Cover | 35 cover Size : L20000*W32*H3.5mm 50 cover Size : L20000*W47*H4mm Light transmittance: 60% |
|  | ③End cap | Size : L60*W50*H2mm |
|  | ④Rigid modular GCDY8140-24V-20mm-30A23 | Material:AL,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80 ; Voltage : 24V ; Power : 11.6W/pcs ; Lumen : 1300Lm/m ; Width : 20mm ; Minimum cutting unit : 14LEDs ; |
|  | ⑤Screw set GCCL-15 | Size : M3.5*50mm |

Chain GAH5060 D3000 Up/Down

LED Curve & Round Linear Lighting System

| Picture | Item | Parameter |
|--|-----------------------------|---|
|  | Pendant cable GCPN-WA2/4 | Steel cable: D1.5*2000\4000mm\maximum load bearing:13Kg |
|  | Pendant cable GCPN-CA2/4 | Size:20AWG\2000mm\maximum load bearing:6.5Kg |
|  | Connect fitting GCEX-25 | Size : L39.5*W20*H12mm |
|  | Clips GCCP-29 | |

Optical Parameter

GAH5060 D3000 module/GCDY8140-24V-20mm-30A23 light source, frosted diffuser

