




Lumix LED High Bay




Better Solutions For Food Processing Environments

- 

IP66 water-proof
 - 

AC100-277V 50/60Hz
 - 

Easy Installation
 - 

140lm/W
- Operating Temp.:** -40°C~ +50°C **Storage Temp.:** -40°C~ +80°C



Options

Power	CCT	Housing Color	Beam Angle
MEANWELL Driver	3000K	White	30°
Sosen Driver	4000K	Black	60°
	5000K	Grey	90°
	5700K		150°


Application

Beverage processing, food processing, refrigeration, food services, poultry and meat processing, and other areas that require NSF certification.

Specifications

Item	Power	Luminous Efficacy	Leds	CRI	Weight	Beam Angle
GBLUM-80W	80W	140lm/W	LUMILEDS 2835	> 80	5.2kg(11.5lbs)	30°/60°/90°/150°
GBLUM-100W	100W	140lm/W	LUMILEDS 2835	> 80	5.2kg(11.5lbs)	30°/60°/90°/150°
GBLUM-120W	120W	140lm/W	LUMILEDS 2835	> 80	5.2kg(11.5lbs)	30°/60°/90°/150°
GBLUM-150W	150W	140lm/W	LUMILEDS 2835	> 80	5.2kg(11.5lbs)	30°/60°/90°/150°

Dimensions(mm)

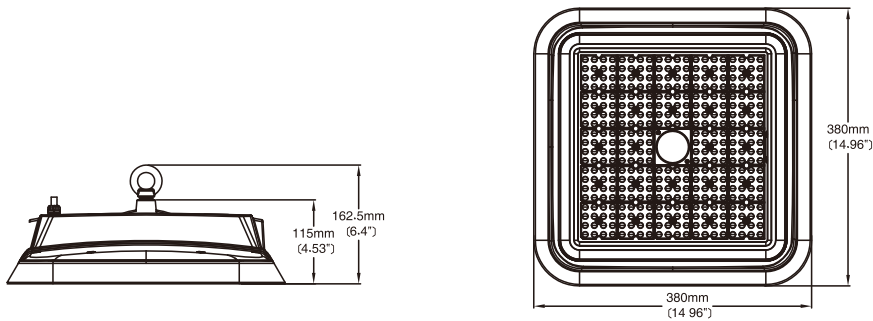

80W/100W/120W/150W



Lumix LED High Bay



Model Options







Microwave Motion Sensor Options (Extra Remote Control Options) Only for Sosen Driver



Default Setting:
 Detection area: 100%,
 Hold time: 5 seconds,
 Daylight threshold: 50lx,
 Stand-by dimming level: 50%,
 Stand-by period: 10 seconds

Photometry



Installation and use

P1 Mounting Ring (Standard)

