

Premium EPS-EX1 LED Exit Sign

LED Emergency Lighting





Introduction


Premium EPS-EX1 is reliable, energy efficiency and ease installation. Exit sign cover is possible to include all diffuser combinations in one box for single or double sided applications. The Exit Sign can be surface mounted, and the quick connect bracket makes installation convenience. It is versatile and suitable for most business settings.

Features

- AS/NZS 2293.3 compliant.
- Ceiling or wall mount with easy slide connect.
- Long life time LiFePO4 battery.
- IC Control Intelligent System provided.
- Ideal for commercial and industrial application.
- Pictogram replaceable.
- Maintained operation.



Dimension Unit:mm

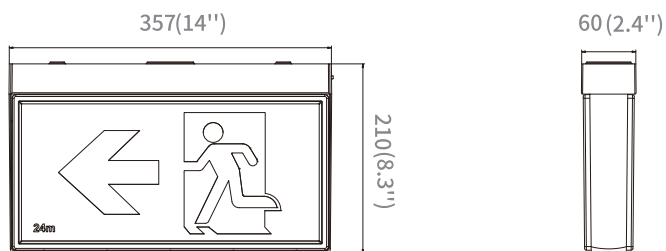

Model List

Model	GEPRE-2W-EPS-EX1-MT-2H	GEPRE-2W-EPS-EX1-MT-2H
Input Voltage	220-240V	220-240V
Output Power	2W max	2W max
Charge Duration	16H	16H
Discharge Duration	2H	2H
Battery	LiFePO4 3.2V600mAh	LiFePO4 3.2V600mAh
Test Mode	Manual Test	Auto Test

Driver Datasheet

Model	EPS-EX1
Frequency	50/60Hz
Discharge Efficiency	≥80%
Total load wattage	3W±0.5W
Power Factor	≥0.3
Output current range	240mA±10%
Short circuit protection	PASS
Over voltage protection	PASS
Surge	0.5KV
Withstand voltage	AC3750V

Technical Data Sheet

Model	EPS-EX1
Input Voltage(V)	220-240V
Output Power	2W Max
LED	SMD2835
CCT(K)	5000K
CRI	>80
LED Driver	Built-in
Protection Class	Class II
Fishing Colour	Black/White
Material	ABS
Operating Temp(°C)	0 °C ~45 °C
Storage Temp(°C)	0 °C ~65 °C